

Model: TMPA-060090-3026-12
Power Amplifier
60-90 GHz, Psat:26 dBm, Gain:30 dBm
Feature:

- Frequency Range: 60-90 GHz
- Gain:30 dBm Type
- Output Power Psat: 26 dBm Type
- Good Power and Gain Flatness

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	60-90			GHz
小信号增益 Small-signal Gain		30		dB
功率增益 Power Gain		25		dB
饱和输出功率Psat	+25	+26		dBm
输入驻波 Input VSWR		2.2		:1
输出驻波Output VSWR		2.2		:1
直流电压 DC Voltage		20		V DC
直流电流 DC Supply Current		1200		mA

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	WR-12/ UG-387/U	
直流偏置 Bias	Solder Pin	
尺寸 Size	60x60x22	mm
重量 Weight	/	g

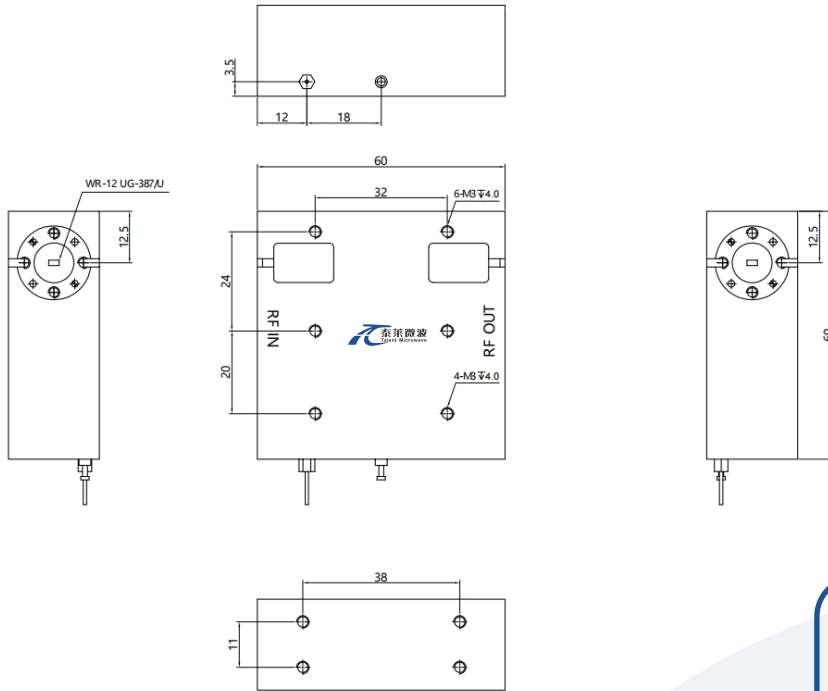

 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF INPUT POWER	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	0		+60	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TMPA-060090-3026-12	Power Amplifier 60-90 GHz, Psat:26 dBm, Gain:30 dBm,WR-12	Rev.1.1

典型曲线 Typical Performance Data:

P_{sat} vs Frequency

