

Model:TLPA26.5G40G-40-40-BC

**Solid State High Power Amplifier Systems
26.5-40GHz,Gain:40dB,Psat:40dBm,220V AC**

Feature:

- Ultra Wide Band: 26.5-40GHz
- Gain: 40dB Min
- Psat Output Power:40dBm Typ
- Protection:Over TEM,over voltage protection.
- 50 Ohm Matched Input / Output



电气特性 Electrical:


参数Parameter	代码Symbol	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	BW	26.5-40			GHz
增益 Gain	Gp	40			dB
饱和输出功率 Psat	Psat		40		dBm
线性输出功率 P1dB	P1dB		37		dBm
输入功率 Input Power	Pin		0	10	dBm
ALC精度	ALC			±0.5	dB
杂散 Non-Harmonic Spurious	Spur	50			dBc
谐波 Harmonics	HAM	25			dbc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac	220/50Hz			V AC
功耗 Power Consumptio	Pdiss			150	W
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位 Units
输入接口 Input Connector	2.92mm Female	
输出接口 Output Connector	WR-28	
DC加电接口 DC Power Interface	Y50X-0803	
尺寸 Size	200*200*85mm ³	
重量 Weight	5	Kg

外形尺寸 Outline Drawing:

Unit: mm

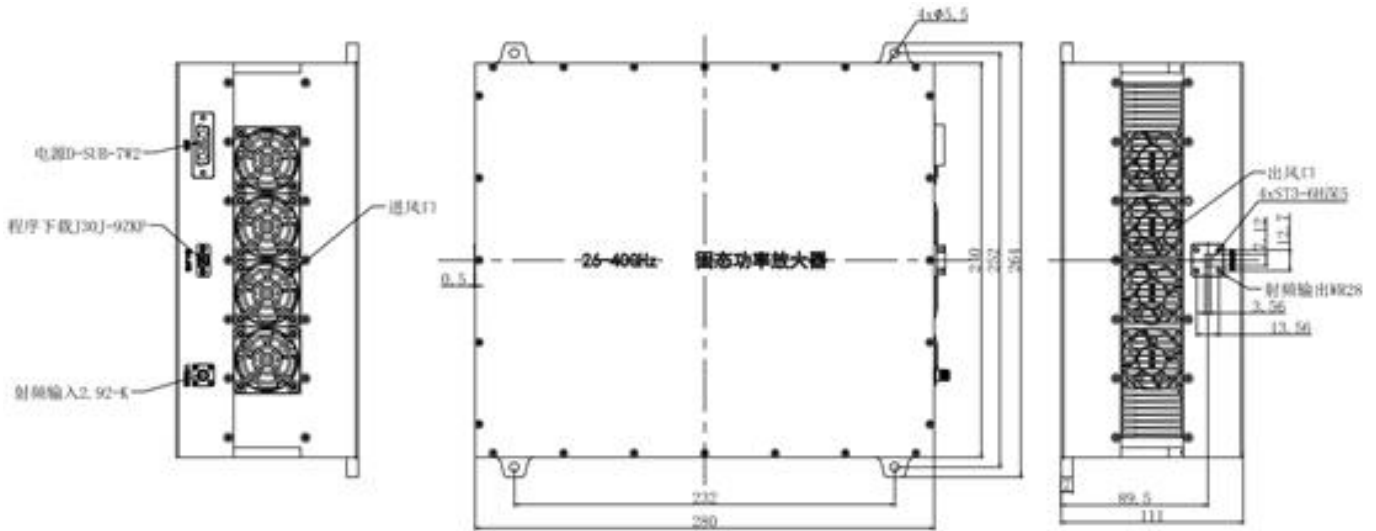

主要功能 Key Features:

参数Parameter	特点 Advantages
控制 Control	LAN
控制功能 Control functions	1, Power setting On/Off 2,ALC
内置保护功能 Protection functions	1,Over TEM 2,Over voltage
冷却系统 Cooling system	Front to back forced air cooling fans makes this ideal for usage in test equipment racks

温度环境 Environmental Conditions:


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA26.5G40G-40-40-BC	Solid State High Power Amplifier Systems, 26.5-40GHz,Gain:40dB,Psat:40dBm,220V AC	Rev.1.0

典型曲线 Typical Performance Data:


SSG vs Frequency

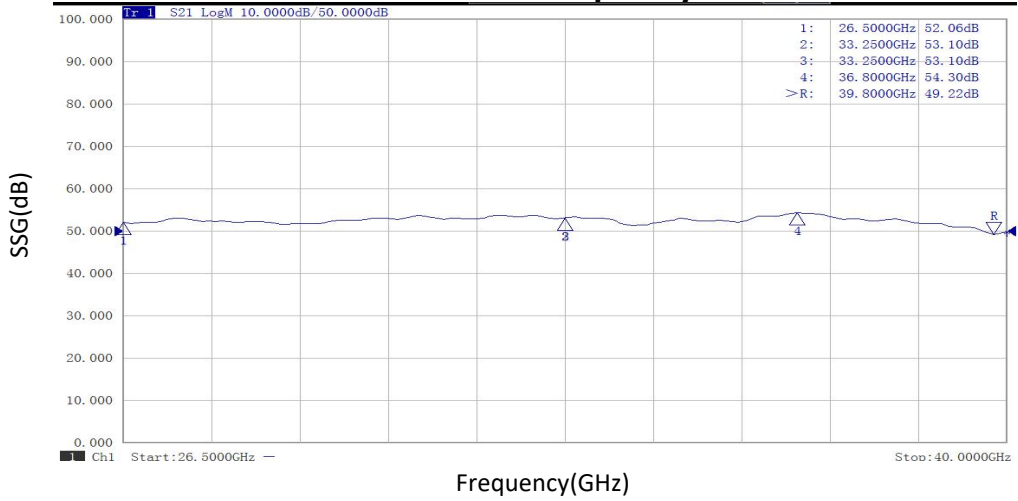




VSWR vs Frequency

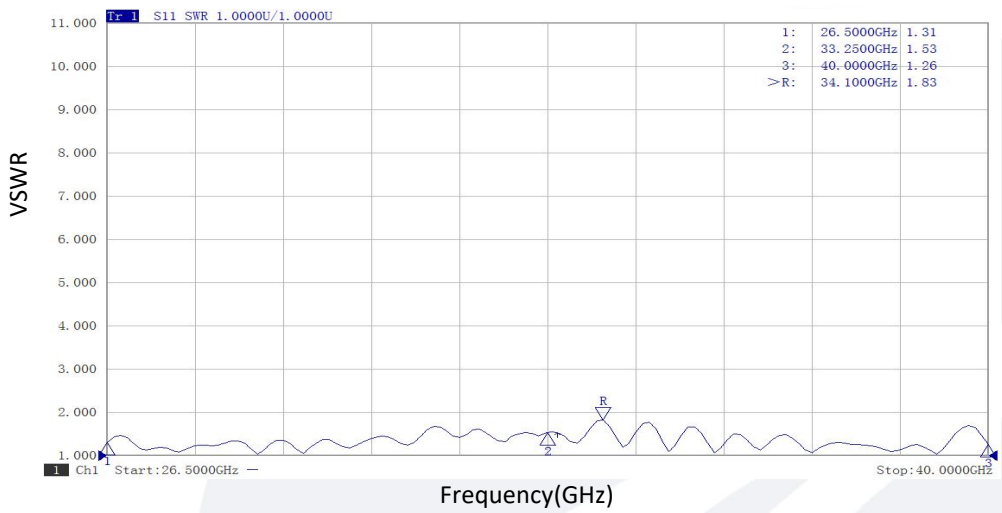

Pout@Equal-Pin

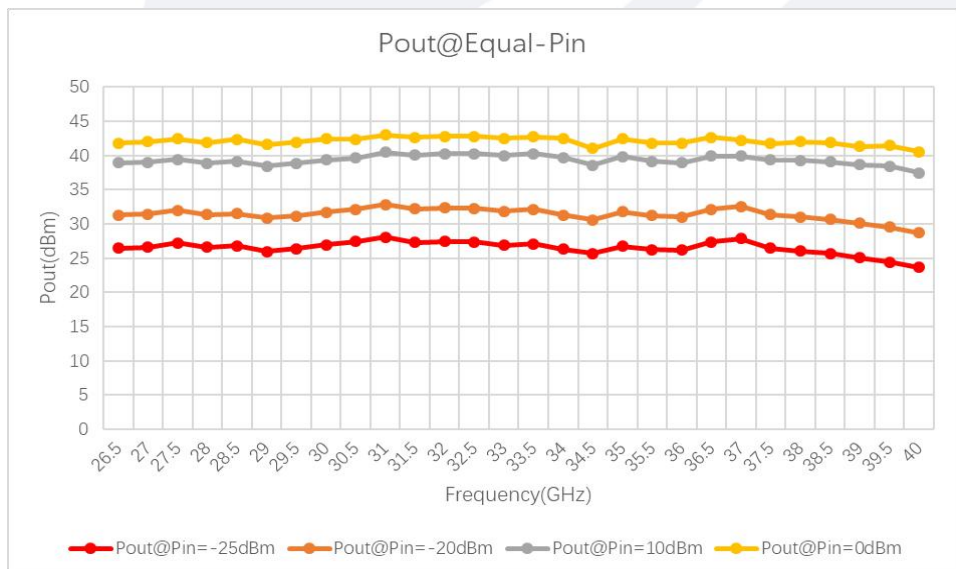

典型曲线 Typical Performance Data:

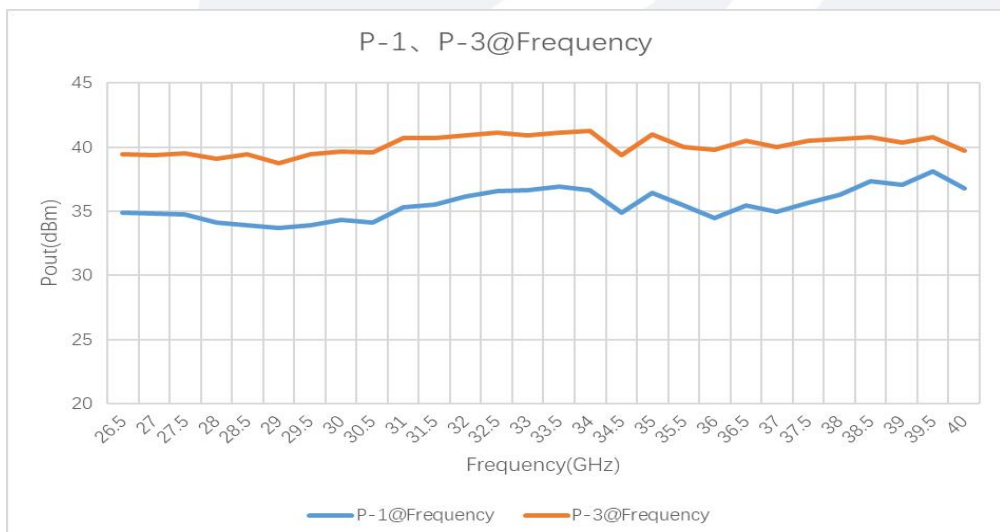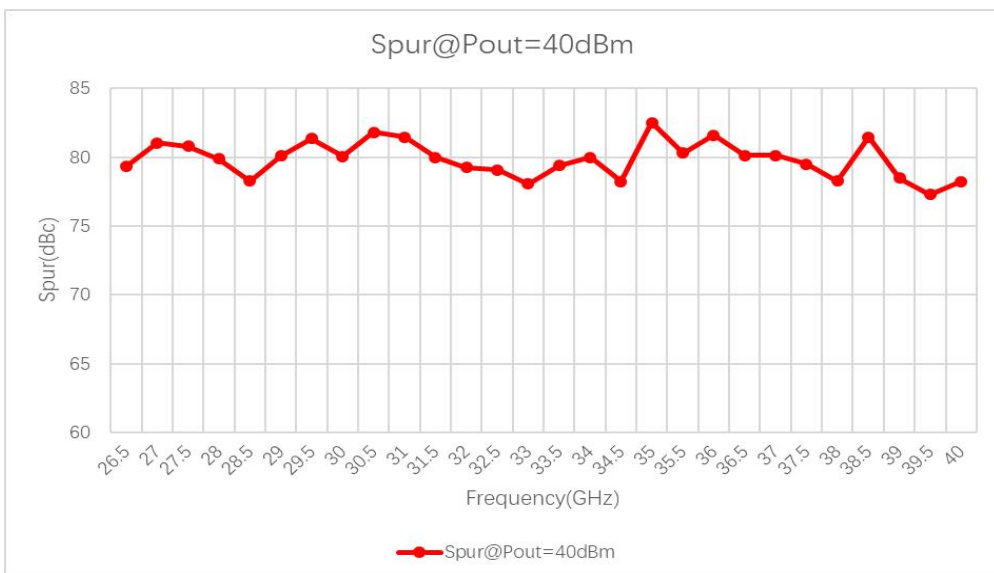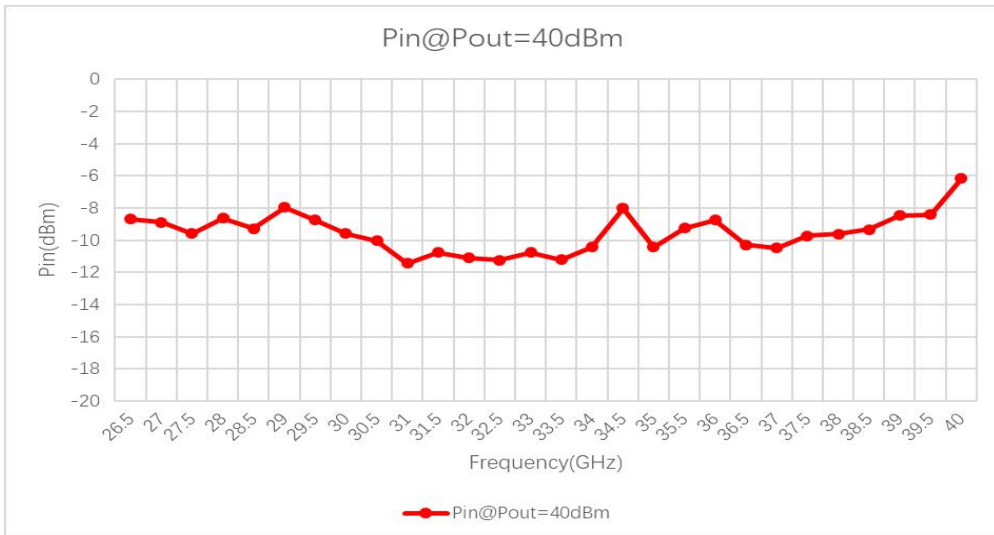

典型曲线 Typical Performance Data:

