

## SPDT Coaxial Switches

R12-NF12012-H , N type, Failsafe , 12VDC , DC to 12GHz , Solder Pin , High power

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-12GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Failsafe
开关顺序 Switch sequence	Break before make
切换时间 Switching time	20 ms max
机械寿命 Mechanical life	1 million min
额定电压 Rated voltage	12 VDC
工作电流 Operating current at 23 °C	270 mA




### 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-1	1-4	4-8	8-12
插入损耗 INSERTION LOSS (MAX) dB	0.3	0.4	0.4	0.5
隔离度 ISOLATION (MIN) dB	80	70	60	60
电压驻波比 V.S.W.R. (MAX)	1.25	1.3:1	1.4:1	1.4:1


### 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	N Female
控制接口 Control connector	Solder Pin
重量 Weight	260g Max


外形尺寸 Outline Drawing: Unit: mm

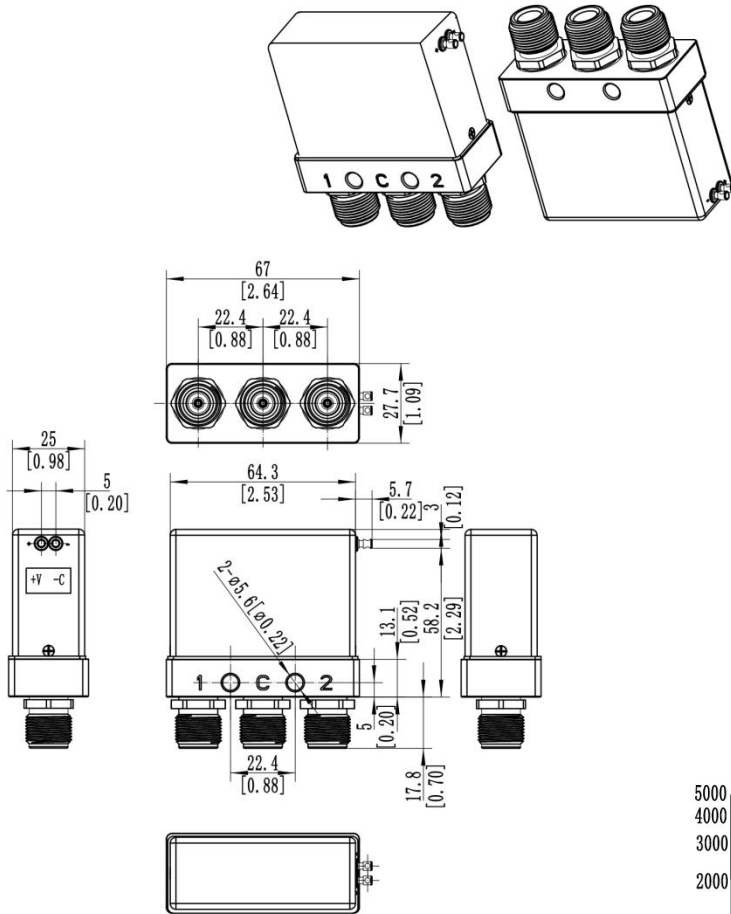

原理图 Schematic:

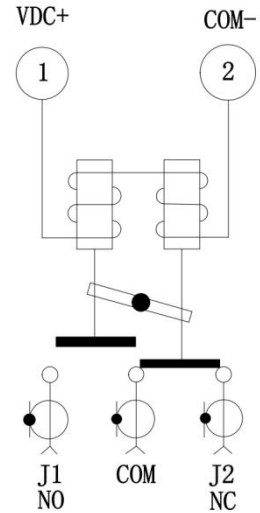

功率曲线图 Average power:

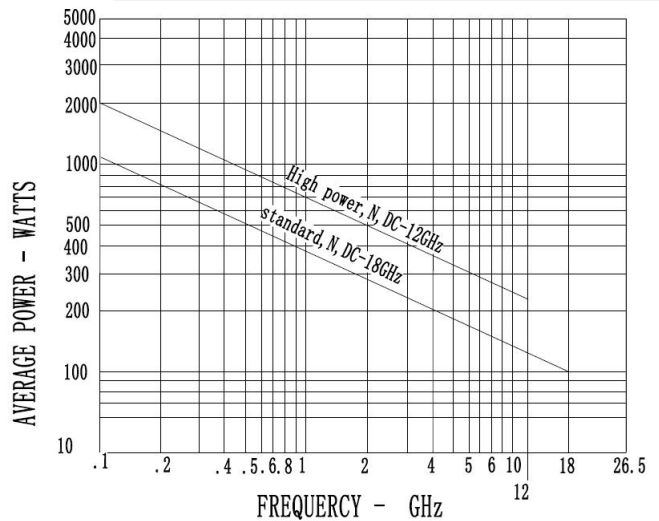

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

标准型号 Part Number:

标准型号 Part Number

SPDT

R12-NF12012-H

额定电压  
Rated Voltage

12VDC

可选项 Option

-S

例如:R12-NF12012-HS  
(备注, S型号满足IP65)