

**Model:TMAM-170260-1800-04**
**Active Frequency Multiplier,  
 X18,170-260 GHz, 0 dBm Output Power**
**Feature:**

- Output Frequency:170-260 GHz
- Output Power : 0dBm Typ
- Low power consumption

**电气特性 Electrical Specifications:**

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	170		260	GHz
输出功率 Output Power		0		dBm
输入频率 Input Frequency	9.44		14.44	GHz
输入功率 Input Power		+5	+10	dBm
倍频次数 Multiply Factor		18		Time
谐波 Harmonics		-20		dBc
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
供电电压 DC Voltage		12		V
供电电流 DC Supply Current		200		mA

**机械特性 Mechanical Specifications:**

参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-04/UG-387/U	
输入接口 Input Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	67.3*36*24	mm


**绝对最大值 Absolute Maximum Ratings:**

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+13V
输入功率 RF Input Power	+10 dbm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System  
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm

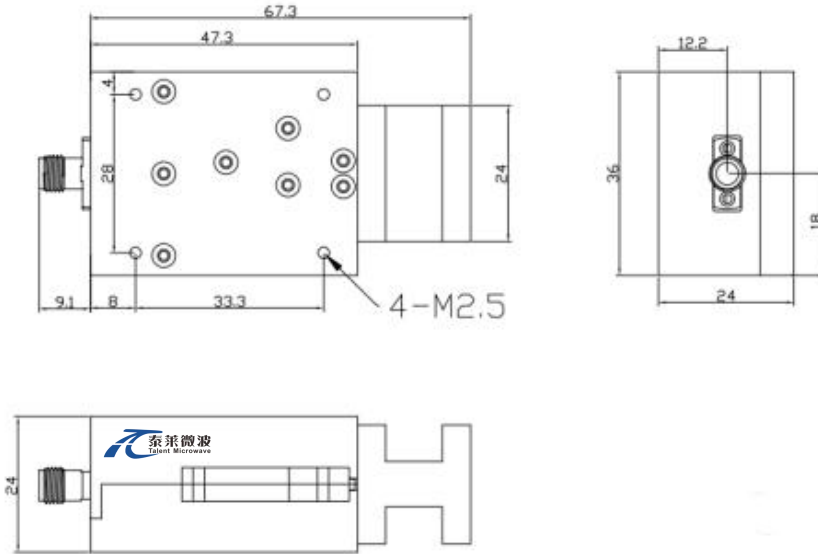

OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-55		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TMAM-170260-1800-04	Active Multiplier,X18,170-260GHz, Output Power:0dBm,SMA Female,WR-04/UG-387/U	Rev.1.1