

Model:TLPA0.1G6G-37-37-BC
**Solid State High Power Amplifier Systems
 0.1GHz-6GHz,Gain:37dB,Psat:37dBm**
Feature:

- Ultra Wide Band: 0.1GHz-6GHz
- Gain: 37dB Min
- Psat Output Power: 37 dBm Min
- Protection:Over TEM,over voltage, over current protection.
- 50 Ohm Matched Input / Output


电气特性 Electrical Specifications:

参数Parameter	代码 Sybo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	0.1-6			GHz
增益 Gain	GP	37	40		dB
增益平坦度 Gain Flatness	Δ GL		\pm 3	\pm 4	dB
线性输出功率 Output P1dB	P1dB	33	34		dBm
饱和输出功率 Output Psat	Psat	37	38		dBm
谐波抑制 Harmonics@Pout=40dBm	HAM		-10		dBc
输入驻波 Input VSWR	VSWRin		1.5	2.0	:1
交流电压 AC Voltage	Vac	110	220		V AC
交流功耗AC Input Power	Pdiss		30	60	Watts
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
尺寸 Size	274*214*94	mm
重量 Weight	5	kg


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
输入功率 RF INPUT POWER	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm

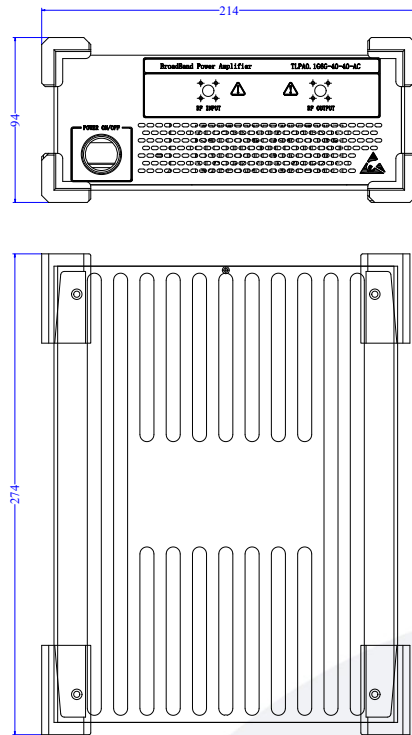

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

主要功能 Key Features:

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection
冷却系统 Cooling system	Built in Cooling system, forced air cooling

温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA0.1G6G-37-37-BC	Solid State High Power Amplifier Systems 0.1-6GHz, Gain:37dB, Psat:37 dBm, 220V AC, Built in Fan Cooling	Rev.1.0