

Model: TMPA-060090-2322-12
Power Amplifier
60-90 GHz, Gain:23 dB,Psat:22.5 dBm
Feature:

- Frequency Range:60-90 GHz
- Gain:23 dB Typ
- Output Power Psat:22.5 dBm Typ
- Good Power and Gain Flatness

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	60-90			GHz
增益 Gain	20	23		dB
饱和输出功率 Output Psat	19.5	22.5	25	dBm
输入驻波 Input VSWR		2.2		:1
输出驻波 Output VSWR		2.2		:1
直流电压 DC Voltage		5		V DC
直流电流 DC Supply Current		900		mA

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	WR-12/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	58*56.2*40	mm
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	17dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm(Inches)

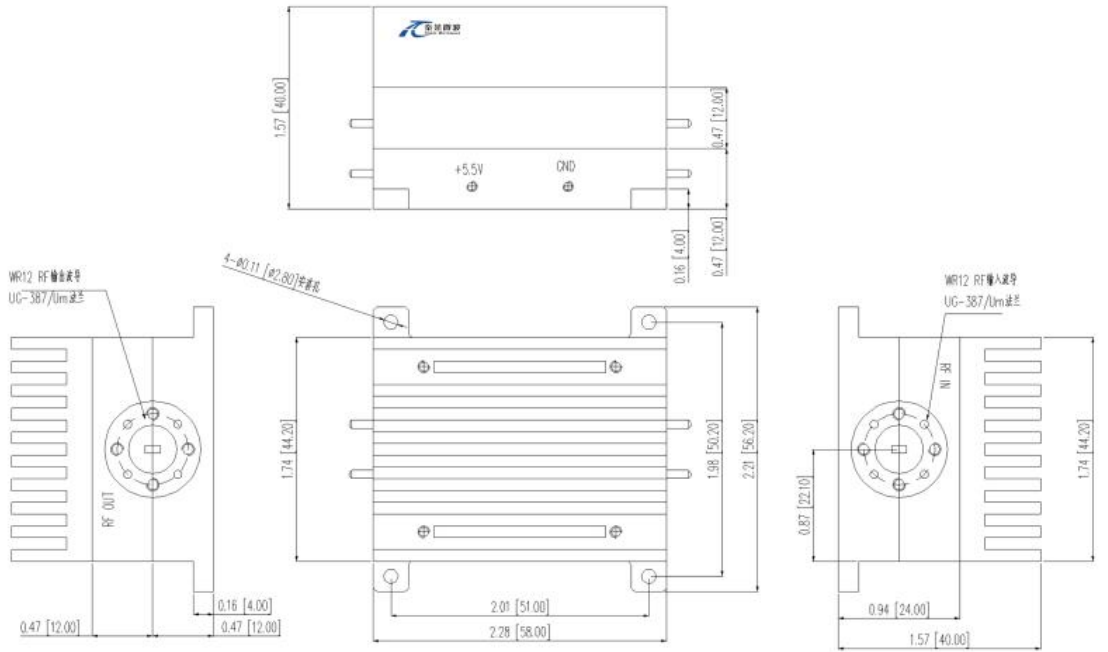

温度环境 Environmental Conditions:



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+60	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TMPA-060090-2322-12	Power Amplifier,60-90 GHz, Gain:23 dB Typ,Psat:22.5 dBm Typ,5V DC,WR-12	Rev.1.1

典型曲线 Typical Performance Data:

Output Power vs Frequency

