

Model: TMPA-040060-3036-19
Power Amplifier
40-60GHz, Gain:30 dB,Psat:36 dBm
Feature:

- Frequency Range: 40-60 GHz
- Gain:30 dB Typ
- Output Power Psat:36 dBm Min
- Good Power and Gain Flatness

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	40-60			GHz
增益 Gain		30		dB
饱和输出功率 Output Psat	36			dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		19		V DC
直流电流 DC Supply Current		4500		mA

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	WR-19/UG-387/U	
直流偏置 DC Bias	MICRO-D15 Female	
尺寸 Size	80*50*31	mm
重量 Weight	100	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+24V
输入功率 RF Input Power	19dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


 Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm(Inches)

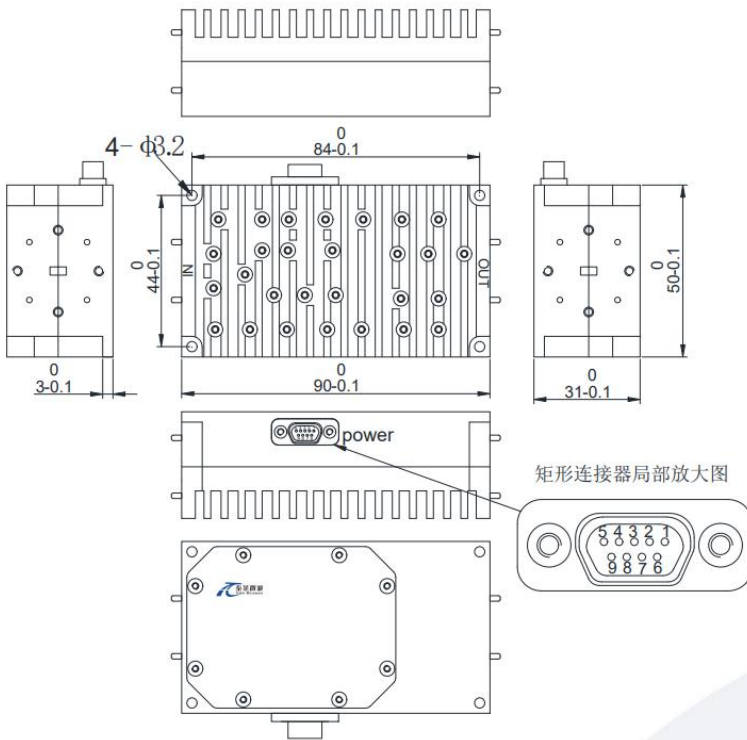

MICRO-D15 Female Define	
引脚 Pin	功能 Function
Pin1-4	+19V
Pin5	NC
Pin6-9	GND

温度环境 Environmental Conditions:



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	+10		+40	°C
存储温度 Non-operating Temperature	0		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TMPA-040060-3036-19	Power Amplifier,40-60 GHz, Gain:30 dB Typ,Psat:36 dBm Min,19V DC,WR-19	Rev.1.1