

**Model: TMPA-090098-3023-10**
**Power Amplifier**  
**90-98 GHz, Gain:30 dB,Psat:23 dBm**
**Feature:**

- Frequency Range:90-98 GHz
- Gain:30 dB Typ
- Output Power Psat:23 dBm Typ
- Good Power and Gain Flatness

**电气特性 Electrical Specifications:**

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	90-98			GHz
增益 Gain		30		dB
饱和输出功率 Output Psat		23		dBm
输入驻波 Input VSWR		2.5		:1
直流电压 DC Voltage		16		V DC
直流电流 DC Supply Current		310		mA

**机械特性 Mechanical Specifications:**

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	WR-10/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	45*44*24(Without Heatsink) 45*56*42(With Heatsink)	mm
重量 Weight	/	g

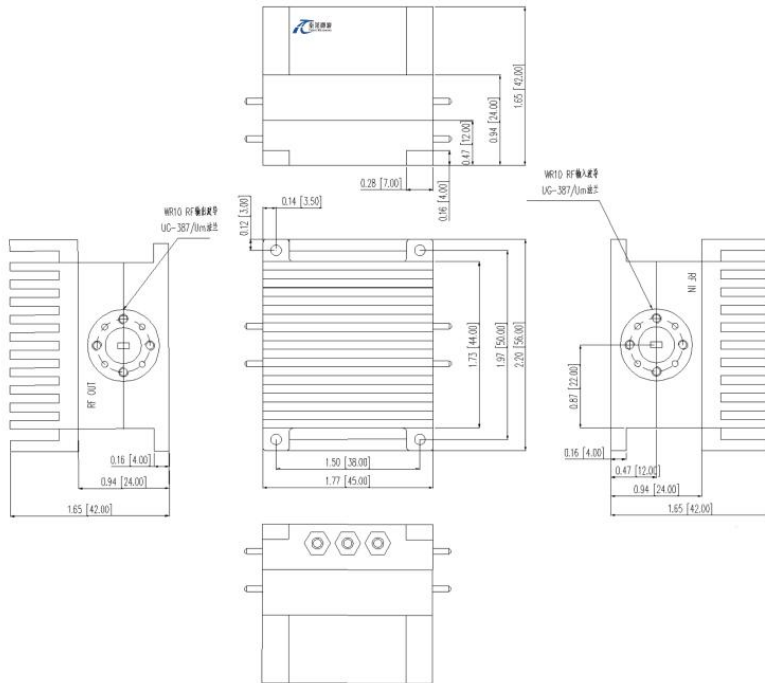
**绝对最大值 Absolute Maximum Ratings:**

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System  
 Benchtop Amplifier**

**外形尺寸 Outline Drawing:**

Unit: mm(Inches)


**温度环境 Environmental Conditions:**


OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-10		+50	°C
存储温度 Non-operating Temperature	-45		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description	版本号Revision
TMPA-090098-3023-10	Power Amplifier,90-98 GHz, Gain:30 dB Typ,P <sub>sat</sub> :23 dBm Typ,16V DC,WR-10	Rev.1.1