

Model:TMAM-075110-0312-10
**Active Frequency Multiplier,
 X3,75-110 GHz, 12 dBm Output Power**
Feature:

- Output Frequency:75-110 GHz
- Output Power : 12 dBm Typ
- Low power consumption

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	75		110	GHz
输出功率 Output Power	10	12		dBm
输入频率 Input Frequency	25		36.67	GHz
输入功率 Input Power	1	3	5	dBm
谐波抑制 Harmonic		25		dBc
倍频次数 Multiply Factor		3		
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
供电电压 DC Voltage		5.5		V
供电电流 DC Supply Current		400		mA

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-10/UG-387/U	
输入接口 Input Connector	2.92mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	48*42*24	mm


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	6 V
输入功率 RF Input Power	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
 Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

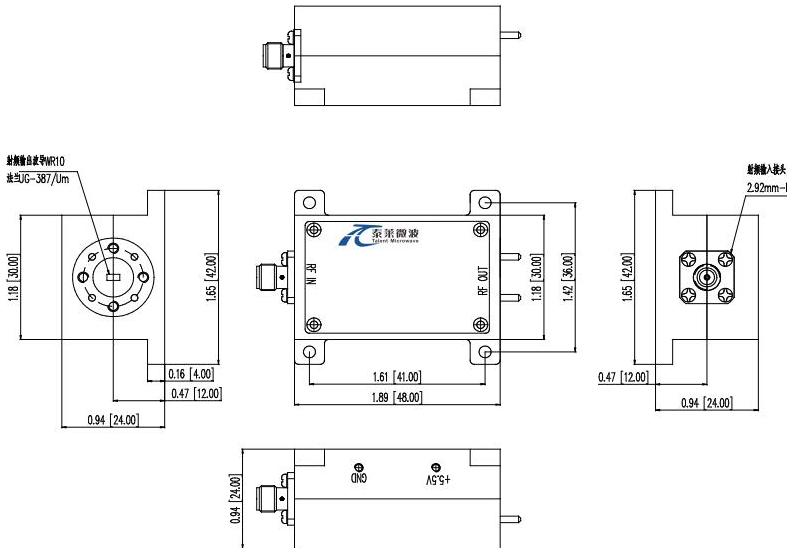

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号 Revision
TMAM-075110-0312-10	Active Multiplier,X3,75-110GHz, Output Power:12dBm,WR-10/UG-387/U,2.92mm Female	Rev.1.1

典型曲线 Typical Performance Data:

Output Power vs Frequency

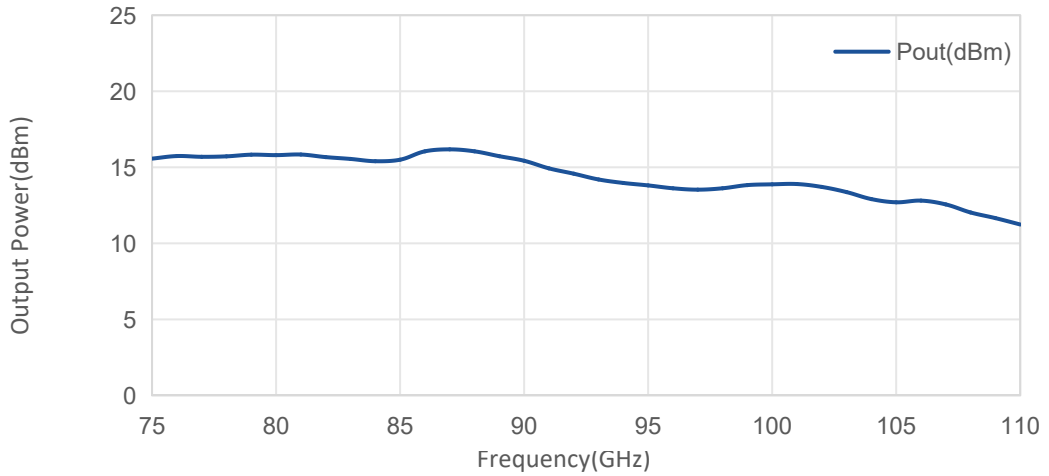

Input Return Loss vs Frequency

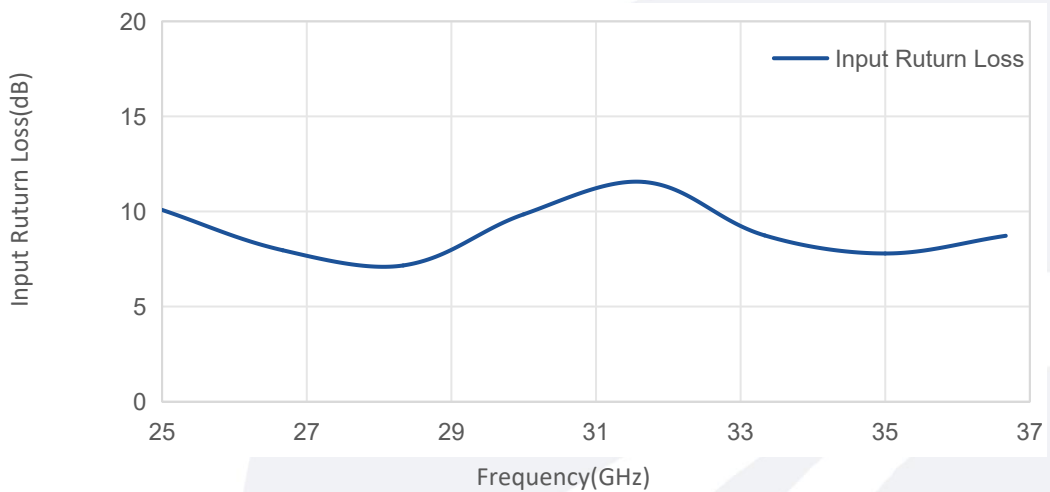

Harmonic Suppression vs Frequency

