

Model:TLPA2400M2500M-47-47

Power Amplifier 2.4-2.5GHz,Gain:47dB,Psat:47dBm

Feature:

- Ultra Wide Band: 2.4-2.5GHz
- Gain:47dB Typ
- Psat Output Power:47dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	2.4-2.5			GHz
增益 Gain	40	47		dB
增益平坦度 Gain Flatness			±1	dB
饱和输出功率 Output Psat	47			dBm
谐波 Harmonics		-12		dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage		+28		V DC
直流电流 DC Supply Current		12		A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	170*94*20	mm
重量 Weight	150	g

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30V
输入功率 RF Input Power	5dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



Available 220V System
Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm



*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA2400M2500M-47-47	Power amplifier 2.4-2.5GHz,Gain:47dB,Psat:47dBm,+28V DC,Without Heatsink.	Rev.1.1
TLPA2400M2500M-47-47-HS	Power amplifier 2.4-2.5GHz,Gain:47dB,Psat:47dBm,+28V DC,With Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

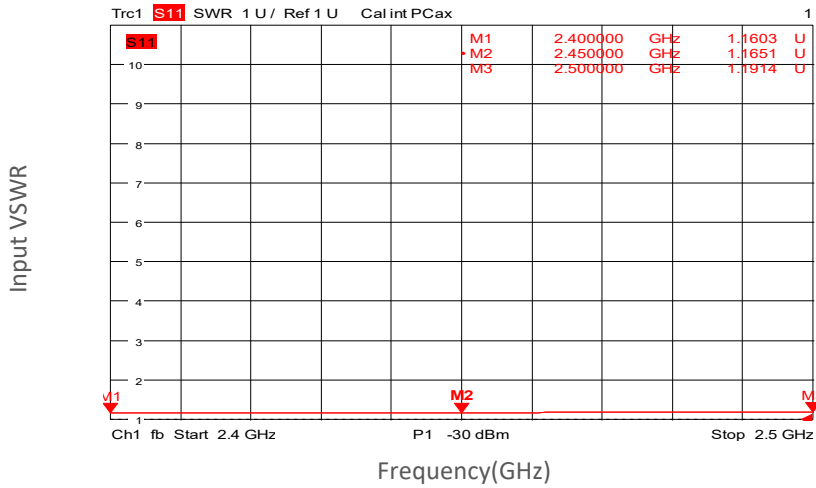

Gain vs Frequency

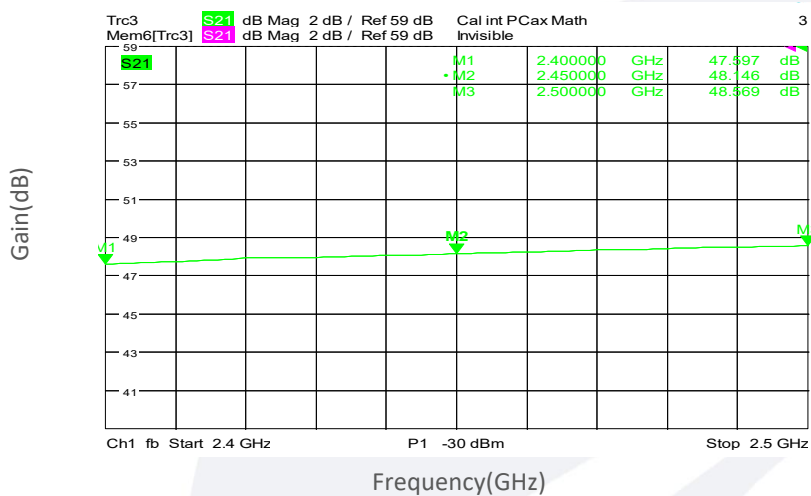


Gain vs Output Power

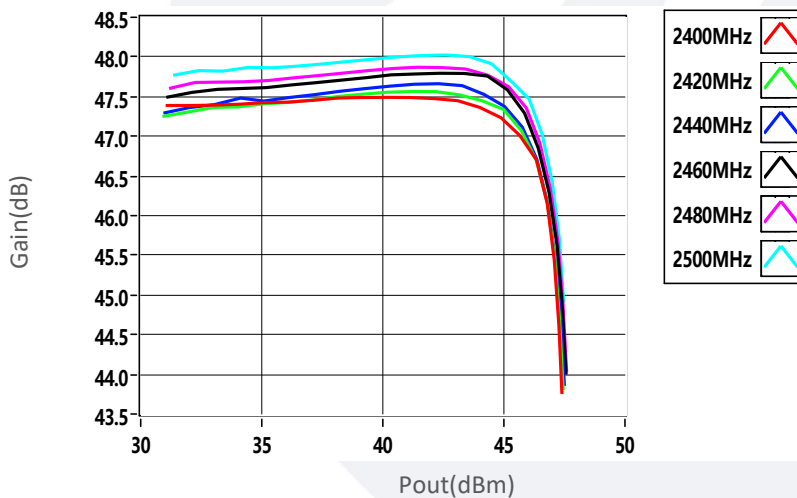


典型曲线 Typical Performance Data:

Psat vs Frequency

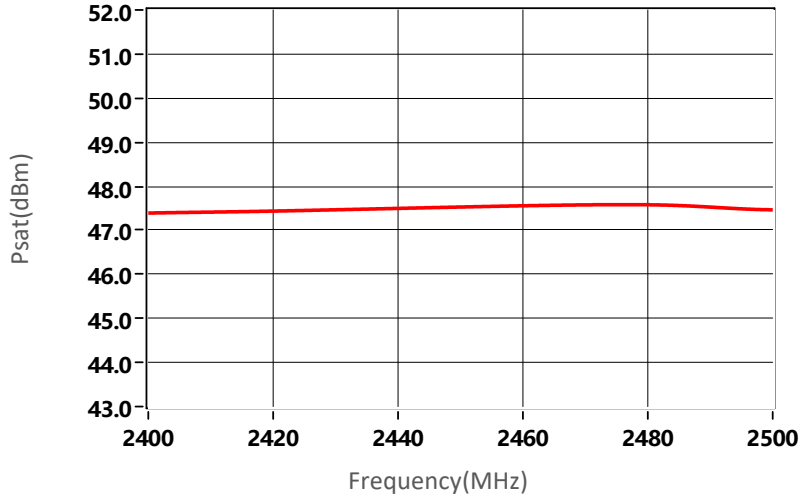

2nd Harmonics vs Output Power

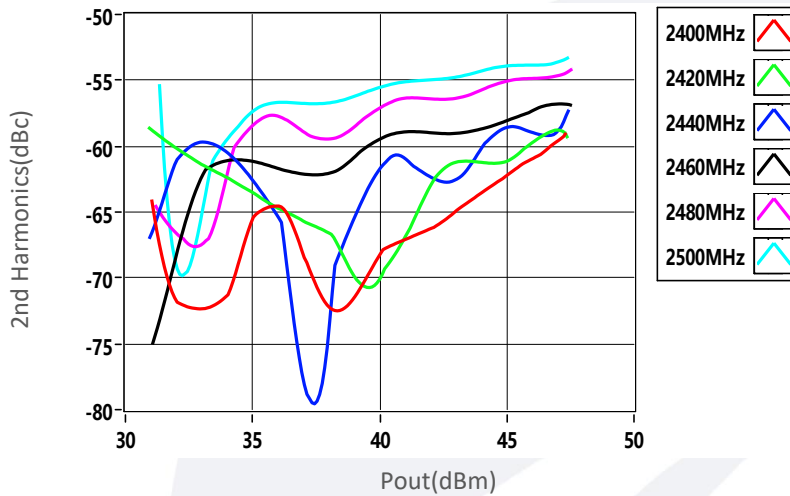

3rd Harmonics vs Output Power

