

Model: TLLA10M50G-50-65
**Low Noise Amplifier , 0.01-50GHz,
 NF:5.0dB, Gain:50dB,P1dB:13dBm**
Feature:

- Ultra Wide Band: 0.01-50GHz
- Gain: 50dB Typ
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.01-50			GHz
增益 Gain	46	50		dB
增益平坦度 Gain Flatness		±3		dB
噪声系数 Noise Figure		5	6.5	dB
线性输出功率 Output P1dB	13			dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage	8	12		V DC
直流电流 DC Supply Current		500		mA
阻抗 Impedance	50			Ohms


Parameters degrade below 100MHz and above 40GHz.

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	95*50.8*12.7	mm
重量 Weight	/	g

绝对最大值 Absolute Maximum Ratings:


参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+13V
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBM)	Class 0, passed 150V



Available 220V System
 Benchtop Amplifier

外形尺寸 Outline Drawing:

Unit: mm(inches)

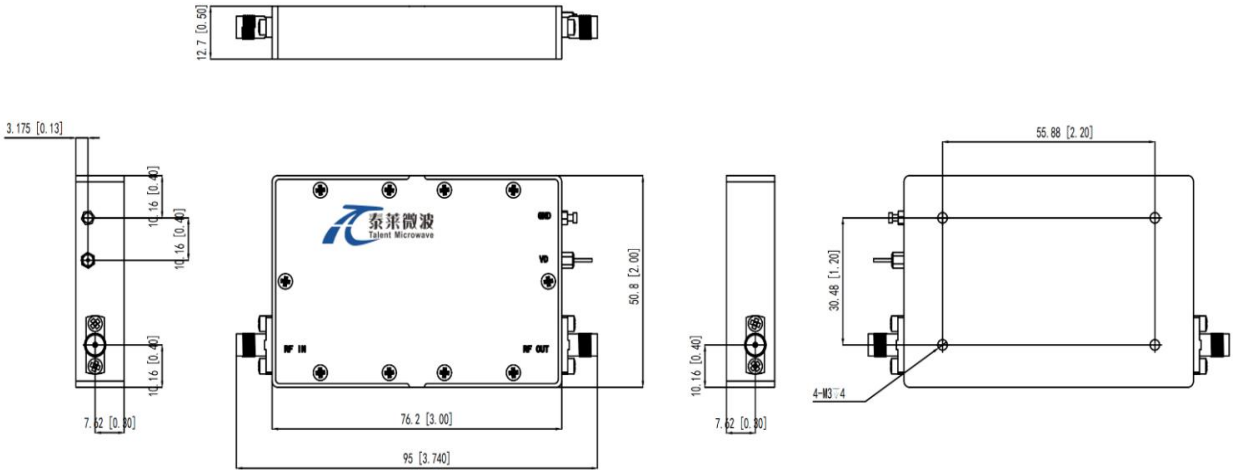

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLLA10M50G-50-65	Low Noise Amplifier, 0.01-50GHz, Noise Figure:5.0dB, Gain:50 dB,P1dB:13dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA10M50G-50-65-HS	Low Noise Amplifier, 0.01-50GHz, Noise Figure:5.0dB, Gain:50 dB,P1dB:13dBm,+12V DC,With Heatsink	Rev.1.1