

Model: TLLA4G8G-26-07
Low Noise Amplifier
4-8GHz, NF:0.7dB, Gain:26dB, P1dB:10dBm
Feature:

- Ultra Wide Band: 4-8GHz
- Gain: 25dB Min
- Noise Figure: 0.7dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	4-8			GHz
增益 Gain	25	26		dB
增益平坦度 Gain Flatness		±1.0	±1.5	dB
噪声系数 Noise Figure		0.7		dB
线性输出功率 Output P1dB	10			dBm
输出三阶交调 Output IP3		25		dBm
输入驻波 Input VSWR		1.5	2	:1
输出驻波 Output VSWR		1.5	2.2	:1
直流电压 DC Voltage		8		V DC
直流电流 DC Supply Current		35		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm
重量 Weight	55	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15V
输入功率 RF Input Power	2 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm(inches)

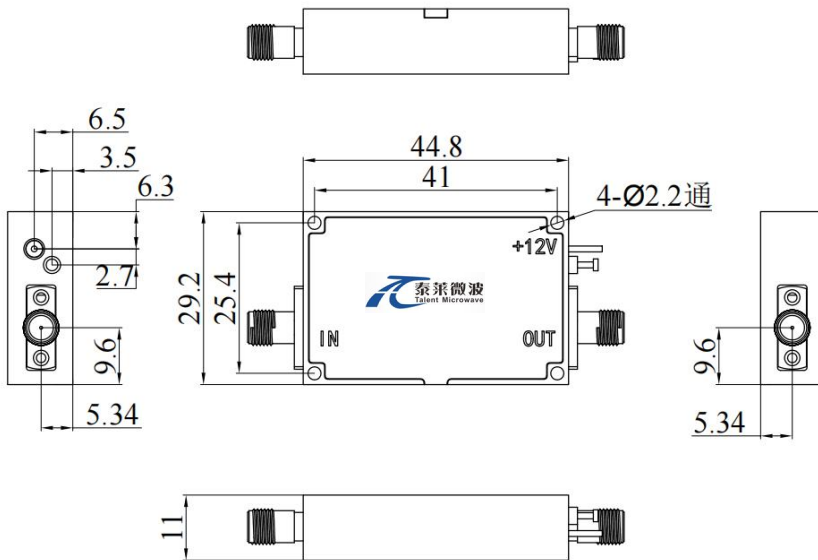

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号 Revision
TLLA4G8G-26-07	Low Noise Amplifier, 4-8GHz, Noise Figure:0.7dB, Gain:26 dB,P1dB:10dBm,+8V DC,Without Heatsink	Rev.1.1
TLLA4G8G-26-07-HS	Low Noise Amplifier, 4-8GHz, Noise Figure:0.7dB, Gain:26 dB,P1dB:10dBm,+8V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Gain&VSWR vs Frequency

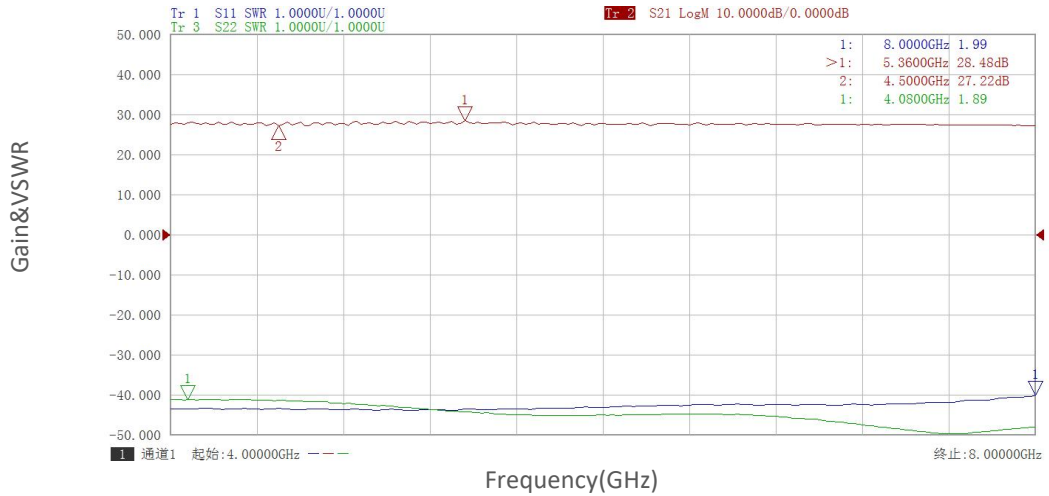

Noise Figure vs Frequency

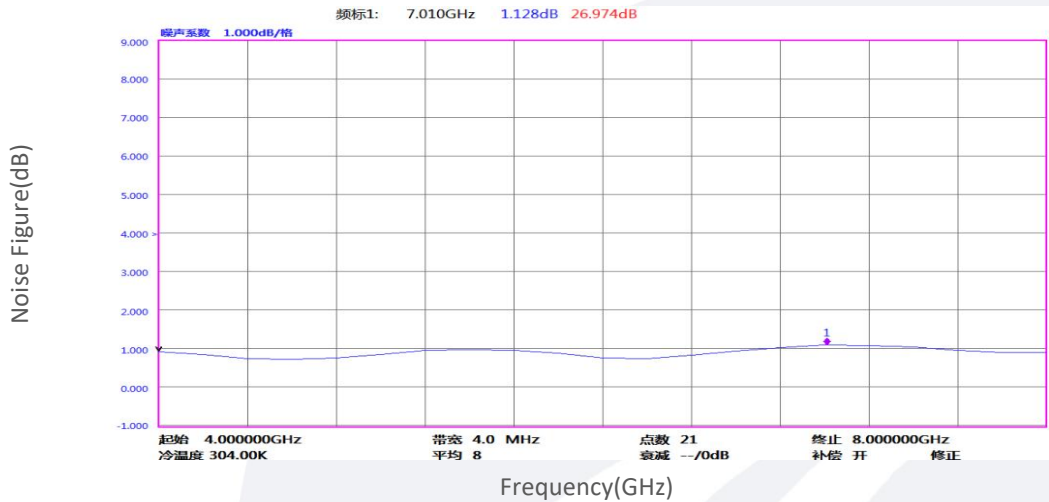

Gain vs Output Power

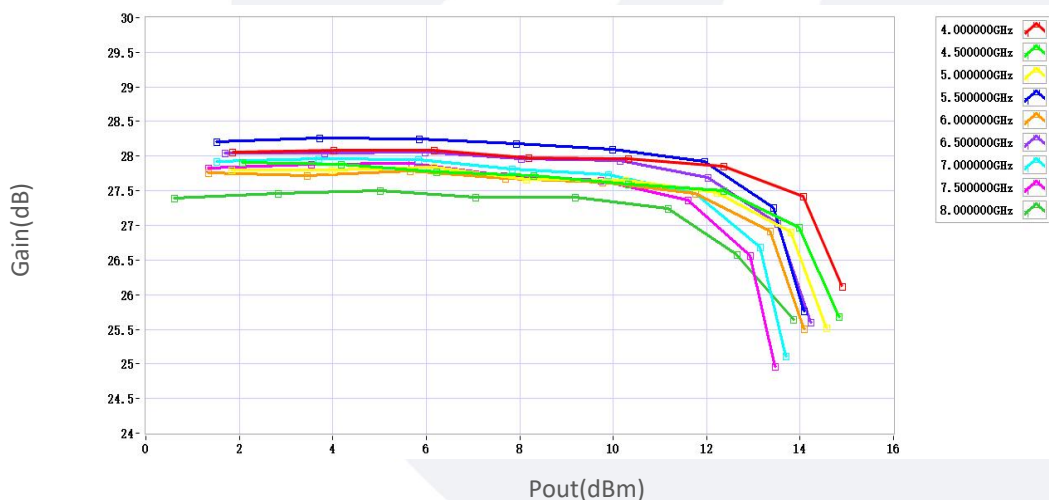

典型曲线 Typical Performance Data:

P1dB vs Frequency

