

## SPDT Coaxial Switches

R12-KF12040-01 , Coaxial Switches , SPDT , 2.92mm , Failsafe , 12VDC , DC to 40 GHz , 2 Pin(2.54mm)

R12-KF24040-01 , Coaxial Switches , SPDT , 2.92mm , Failsafe , 24VDC , DC to 40 GHz , 2 Pin(2.54mm)

R12-KF28040-01 , Coaxial Switches , SPDT , 2.92mm , Failsafe , 28VDC , DC to 40 GHz , 2 Pin(2.54mm)

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-40GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Failsafe
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	5 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	190 98 83 mA




### 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18	18-26.5	26.5-40
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4	0.7	1.0
隔离度 ISOLATION (MIN) dB	70	70	60	55	50
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.3:1	1.4:1	1.7:1	2.0:1


### 环境和物理特性 Environmental And Physical Characteristics:

参数 Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 12ms, ½ine
射频接口 RF Connector type	2.92 Female
控制接口 Control connector	2 Pin(2.54mm)
重量 Weight	50g Max


**外形尺寸 Outline Drawing:** Unit: mm

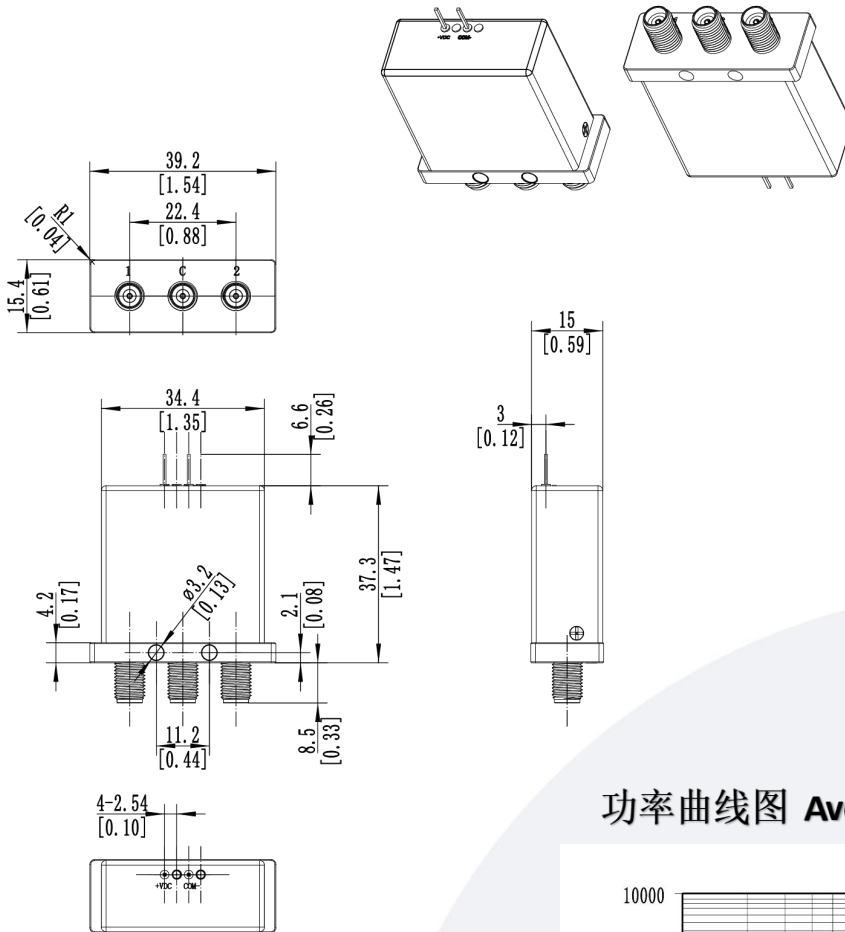

**原理图 Schematic:**

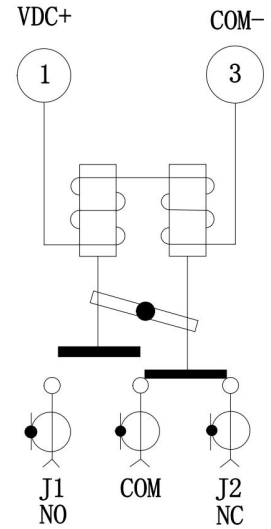

**功率曲线图 Average power:**

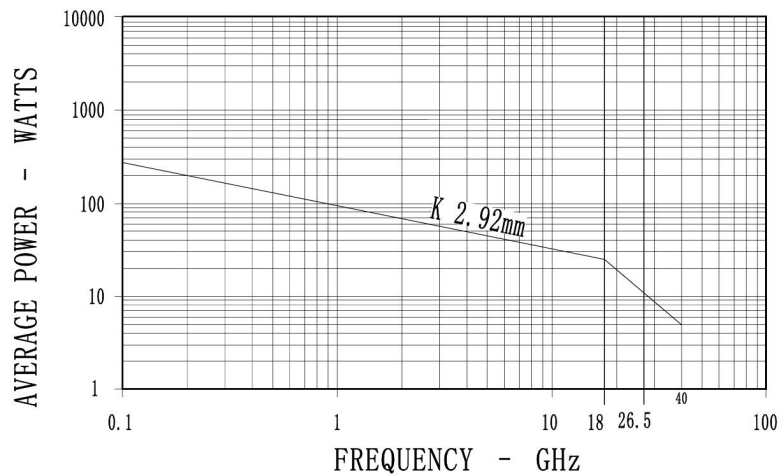

This graph is based on the following conditions:


- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

**标准型号 Part Number:**


标准型号 Part Number	额定电压 Rated Voltage	可选项 Option
SPDT		
R12-KF12040-01	12VDC	-S
R12-KF24040-01	24VDC	例如:R12-KF12040-01-S
R12-KF28040-01	28VDC	(备注, S型号满足IP65)

典型曲线 Typical Performance Data:

INSERTION LOSS

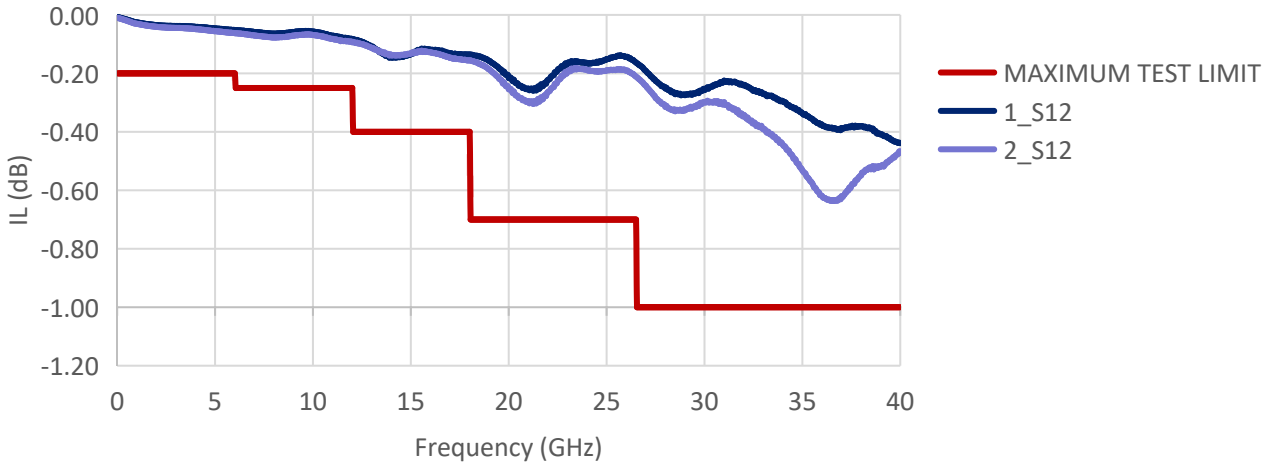

VSWR

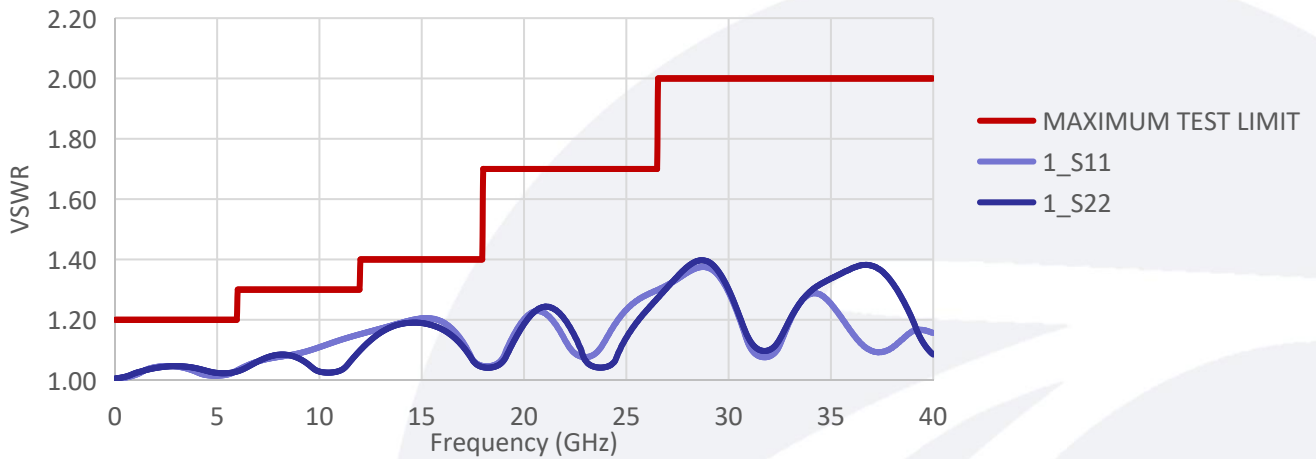

ISOLATION

