

Model:TLPA2G18G-50-47-BC

Solid State High Power Amplifier Systems 2-18GHz,Gain:50dB,Psat:47dBm,+28V DC

Feature:

- Wide Band: 2-18GHz
- Gain: 50dB Min
- Psat Output Power:47dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output



电气特性 Electrical Specifications:

参数Parameter	代码 Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	2-18			GHz
增益 Gain	GP	50			dB
增益平坦度 Gain flatness	Δ GL		± 4.5	± 5	dB
饱和输出功率 Output Psat	Psat	47			dBm
杂散 Spurious	Spur			-60	dBc
谐波 Harmonics	HAM			-10	dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
直流电压 DC Voltage	Vdc	+28			V DC
功耗 Power consumtpion	Pdiss	1400@Max			Watts
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input/Output Connector	SMA Female/N Female	
尺寸 Size	340*333*98.5	mm
重量 Weight	10	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

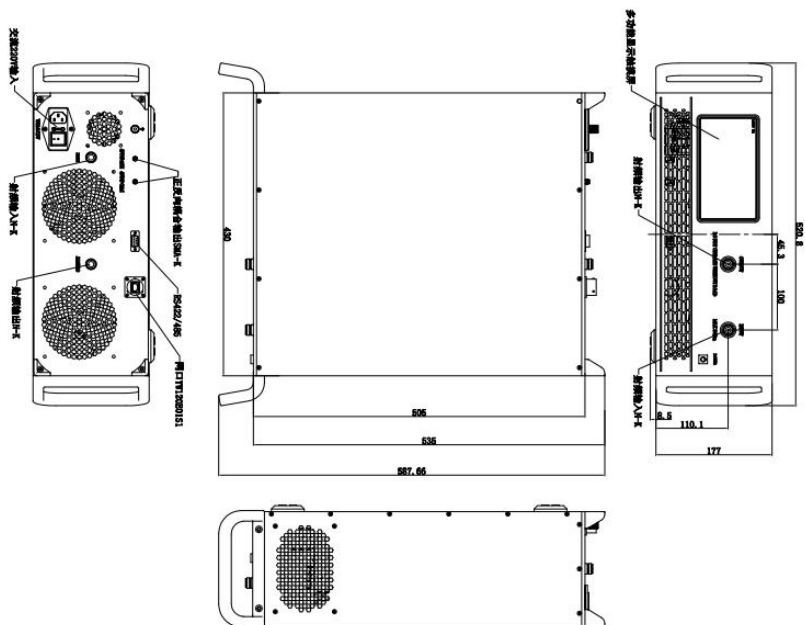

主要功能 Key Features:



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

参数 Parameter	特点 Advantages
控制 Control	RS422/Ethernet
内置保护功能 Protection functions	1,Over TEM 2,Over voltage 3,Over current protection 4,Over VSWR
控制功能 Control functions	1,Power setting On/Off 2,ALC
冷却系统 Cooling system	Built in Cooling system,forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA2G18G-50-47-BC	Solid State High Power Amplifier Systems 2-18GHz,Gain:50dB,Psat:47dBm,+28V DC,Built in Fan Cooling	Rev.1.0