

**Model:TLPA26.5G40G-50-50-BC**
**Solid State High Power Amplifier Systems  
 26.5-40GHz,Gain50dB,Psat:50 dBm**
**Feature:**

- Wide Band: 26.5-40GHz
- Gain: 50dB Min
- Psat Output Power:50dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

**电气特性 Electrical Specifications:**

参数Parameter	代码 Symbo	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	BW	26.5-40			GHz
增益 Gain	GP	50			dB
增益平坦度 Gain flatness	$\Delta$ GL		$\pm 3$	$\pm 4$	dB
增益调节范围 Gain adjust range	$\Delta$ GR		31.5		dB
增益调节步进 Gain adjust range	$\Delta$ GS		0.5		dB
饱和输出功率 Psat	Psat	50			dBm
杂散 Spurious	Spur			-60	dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac		220		V AC
交流功耗 AC Input Power	Pdiss	2800@Max			Watts
阻抗 Impedance	I/O-IMP	50			Ohms

**机械特性 Mechanical Specifications:**


参数 Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	2.92 Female/2.92 Female	
网口通信 Network port Communication	RJ-45/DB9	
尺寸 Size	5U*550 depth	mm
重量 Weight	36.6	Kg

**绝对最大值 Absolute Maximum Ratings:**

参数 Parameter	指标 Value
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

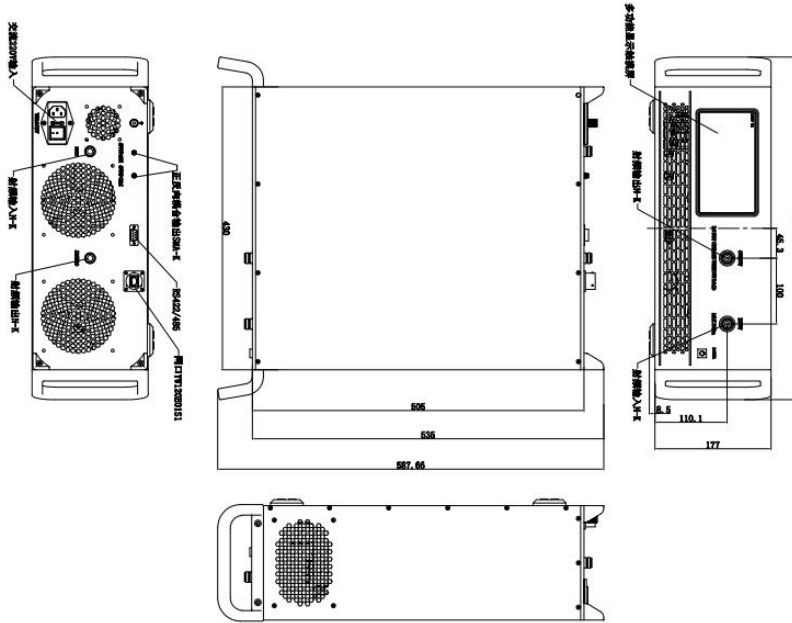

主要功能 Key Features:



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2, ALC automatic level control
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
冷却系统 Cooling system	Built in Cooling system, forced air cooling

**温度环境 Environmental Conditions:**


参数 Parameter	Min.	Typ.	Max.	单位 Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-40		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	15000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description	版本号 Revision
TLPA26.5G40G-50-50-BC	Solid State High Power Amplifier Systems 26.5-40GHz,Gain:50dB,Psat:50dBm,220V AC,Built in Fan Cooling	Rev.1.0


**典型曲线 Typical Performance Data:**

**Input VSWR vs Frequency**

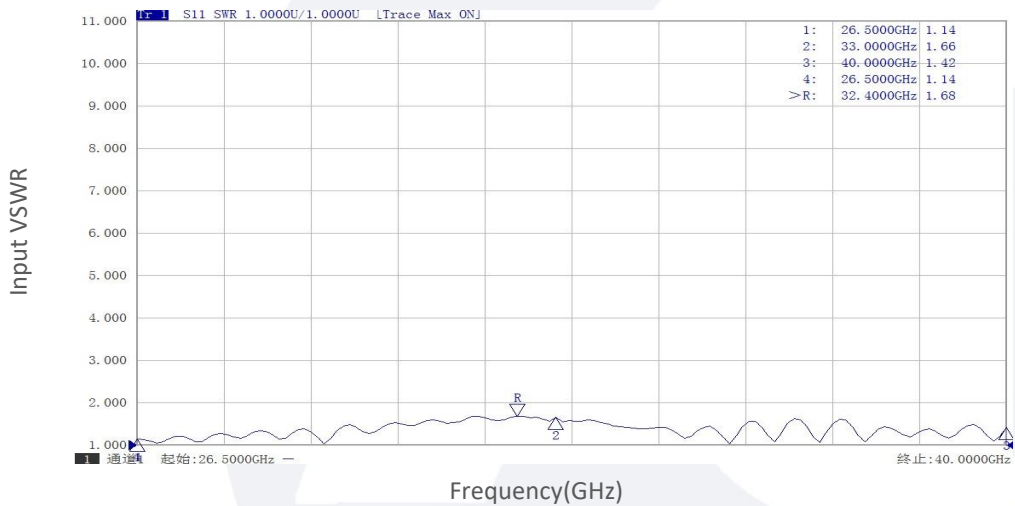


典型曲线 Typical Performance Data:


Gain vs Frequency

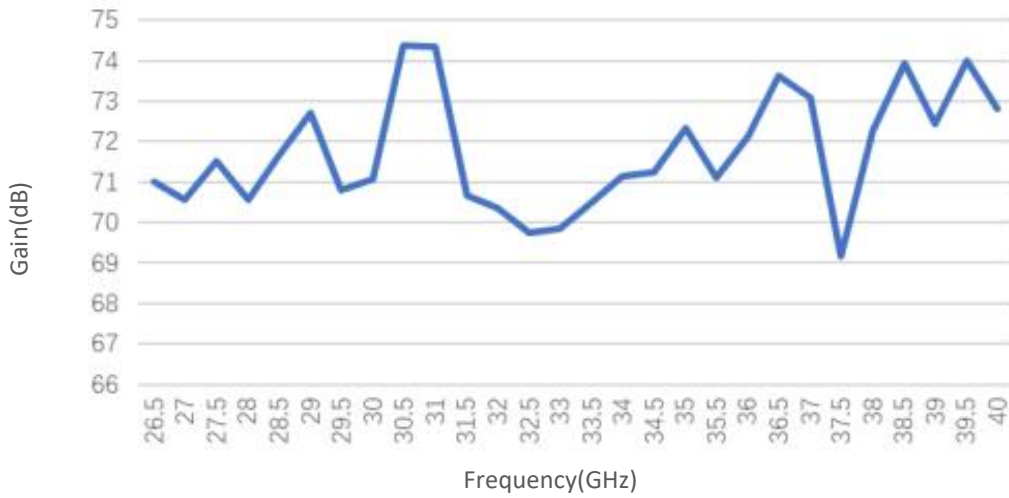

Pout@Equal\_Pin

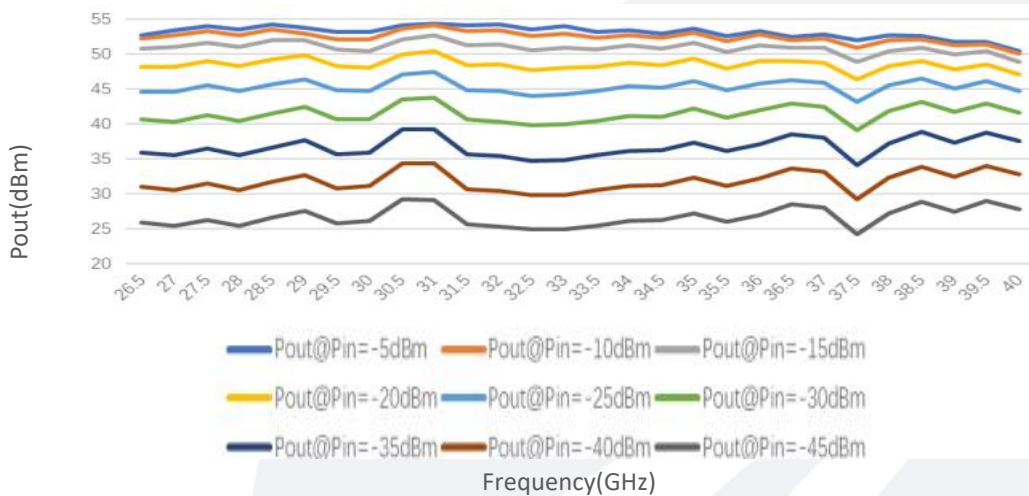

P1dB&P3dB vs Frequency

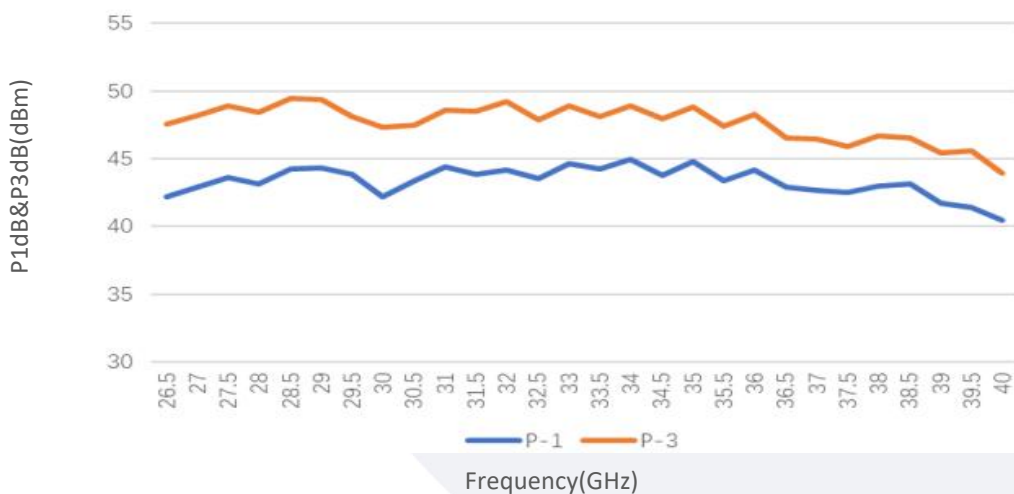

典型曲线 Typical Performance Data:

Spurious vs Frequency

