

型号 Part No : RT2-20-SMP

DC-20GHz,2W,SMP Male Coaxial Fixed Terminations

电气特性 Electrical Specifications:

工作频率 Frequency Range:	DC-20GHz
驻波 VSWR:	≤1.35
耐功率 RF Power Handling:	≤2Watts
阻抗 Impedance:	50 Ohms




机械特性 Mechanical Specifications:

操作温度 Operation Temperature:	-55°C - +125°C
存储温度 Storage Temperature:	-55°C - +125°C
壳体 Body Material:	Stainless Steel
中心导体 Center Conductor:	Male:Brass, Golden
接口 Connectors:	SMP Male
相对湿度 Relative Humidity:	≤90%

外形尺寸 Outline Drawing:

Unit: mm

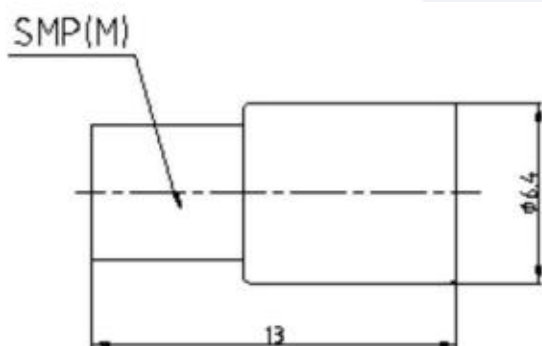

Note:

Nominal impedance: 50Ω

Average power: 2W corresponding to the ambient temperature 25° C, when the temperature rises to 125° C, the power linearly decreases to 0.1W.

Connector type: SMP(M)

订货信息 Ordering Information:

标准型号 Part Number	描述 Description
RT2-20-SMP	DC-20GHz,2W,SMP Male Coaxial Fixed Termination