

型号 Part No : TT1-40-SSMA

DC-40GHz,1W,SSMA Coaxial Fixed Terminations

电气特性 Electrical Specifications:


工作频率 Frequency Range:	DC-40GHz
驻波 VSWR:	DC-18GHz, ≤1.21 @Max DC-30GHz, ≤1.30 @Max DC-40GHz, ≤1.40 @Max
耐功率 RF Power Handling:	≤1Watts Average at 25°C
阻抗 Impedance:	50 Ohms

机械特性 Mechanical Specifications:

操作温度 Operation Temperature:	-55°C - +100°C
存储温度 Storage Temperature:	-55°C - +100°C
中心导体 Center Conductor:	Gold-plated, beryllium bronze
接口 Connectors:	Passivated Stainless Steel
重量 Weight:	2g

外形尺寸 Outline Drawing:

Unit: mm

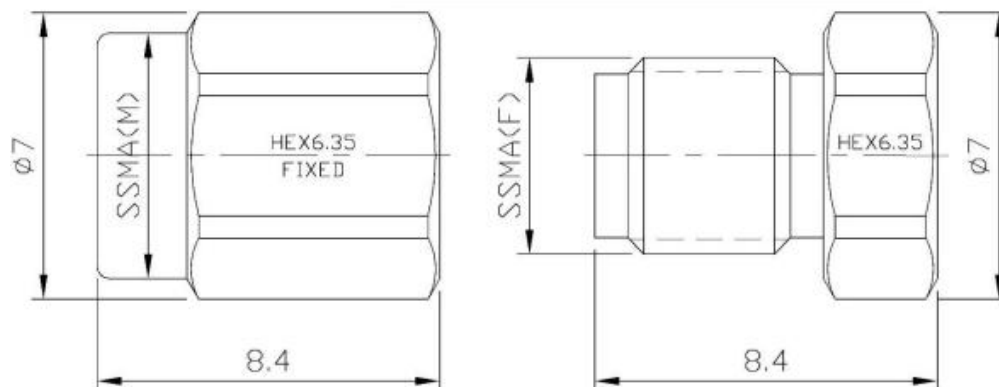

订货信息 Ordering Information:

标准型号 Part Number	描述 Description
TT1-40-SSMA	DC-40GHz,1W,SSMA Coaxial Fixed Termination