

型号 Part No : TT1-110-1.0A

DC-110GHz,1W,1.0mm Coaxial Fixed Terminations

电气特性 Electrical Specifications:


| | |
|-----------------------|--|
| 工作频率 Frequency Range: | DC-110GHz |
| 驻波 VSWR: | ≤1.56 |
| 耐功率 RF Power Handing: | ≤1Watts Average at 25°C |
| 峰值功率 Peak Power: | 20Watts (5 μSec Pulse Width , 2% Duty Cycle) |
| 阻抗 Impedance: | 50 Ohms |

机械特性 Mechanical Specifications:

| | |
|-----------------------------|-------------------------------|
| 操作温度 Operation Temperature: | -55°C - +125°C |
| 存储温度 Storage Temperature: | -55°C - +125°C |
| 壳体 Body Material: | Stainless Steel Passivation |
| 中心导体 Center Conductor: | Gold-plated, Beryllium Bronze |
| 接口 Connectors: | 1.0mm FeMale/Male |
| 相对湿度 Relative Humidity: | ≤90% |

外形尺寸 Outline Drawing:

Unit: mm

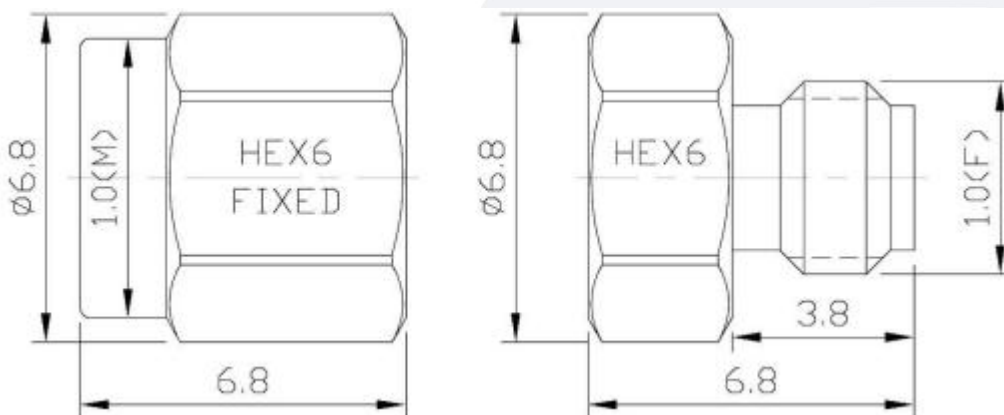

订货信息 Ordering Information:

| 标准型号 Part Number | 描述 Description |
|------------------|--|
| TT1-110-1.0A | DC-110GHz,1W,1.0mm Coaxial Fixed Termination |