

型号 Part No : TT300-6-N-A

DC-6GHz,300W,N Female/Male Coaxial Fixed Terminations

电气特性 Electrical Specifications:


工作频率 Frequency Range:	DC-6 GHz
驻波 VSWR:	DC-3GHz,≤1.15 @Max DC-4GHz,≤1.20 @Max DC-6GHz,≤1.25 @Max
耐功率 RF Power Handling:	≤300Watts Average at 25°C
阻抗 Impedance:	50 Ohms

机械特性 Mechanical Specifications:

操作温度 Operation Temperature:	-55°C - +100°C
存储温度 Storage Temperature:	-55°C - +100°C
壳体材质 Body Material:	Black, Finned Aluminum
中心导体 Center Conductor:	Gold-plated, Phosphor bronze
接口 Connectors:	N Female/Male, Nickel plated Brass
重量 Weight:	3Kg

外形尺寸 Outline Drawing:

Unit: mm

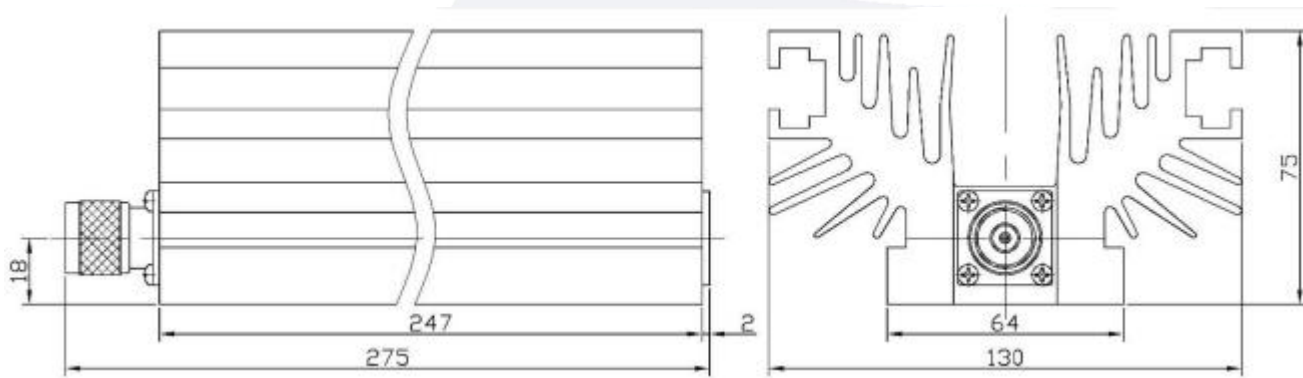

订货信息 Ordering Information:

标准型号 Part Number	描述 Description
TT300-6-N-A	DC-6GHz,300W,N Female/Male Coaxial Fixed Termination

典型曲线 Typical Performance Data:

Input VSWR vs Frequency

