

型号 Part No : TLLF-DC-10KHz-S
DC-10KHz Low Pass Filter
电气特性 Electrical Specifications:

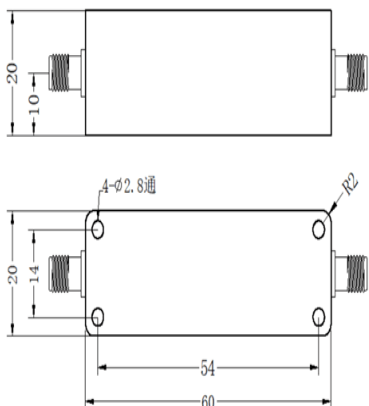
参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	DC-10			KHz
差损 Insertion Loss			3	dB
带外抑制 Rejection	@20-1000KHz	40		dB
耐受功率 Power Handling		1		W
输入驻波 Input VSWR			1.8	:1
输出驻波 Output VSWR			1.8	:1
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

操作温度 Operation Temperature:	-40°C - +70°C
存储温度 Storage Temperature:	-55°C - +85°C
材质 Material:	Silver Plating
接口 Connectors:	SMA Female
尺寸 Size:	60*20*20(±0.1mm)

外形尺寸 Outline Drawing:

Unit: mm


订货信息 Ordering Information:

标准型号 Part Number	描述 Description
TLLF-DC-10KHz-S	DC-10KHz, Insertion Loss: 3dB, SMA FeMale Coaxial Fixed Termination