

Model:TLPA18G40G-43-43-BC
**Solid State High Power Amplifier Systems
 18-40GHz,Gain:43dB,Psat:43dBm,220V AC**
Feature:

- Wide Band: 18-40GHz
- Gain: 43dB Min
- Psat Output Power:43dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output


电气特性 Electrical Specifications:

参数Parameter	代码 Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	18-40			GHz
增益 Gain	GP	43			dB
饱和输出功率 Output Psat	Psat	43			dBm
ALC精度	ALC			±0.5	dB
杂散 Spurious	Spur			-50	dBc
谐波 Harmonics	HAM			-15	dBc
输入驻波 Input VSWR	VSWRin			2	:1
交流电压 AC Voltage	Vac	220			V AC
功耗 Power Consumption	Pdiss	400(Max)			Watts
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input/Output Connector	2.92 Female/2.92 Female	
AC加电控制 AC Power Interface	Air switch	
尺寸 Size	19 Inch 3U	mm
重量 Weight	30	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	220V AC
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

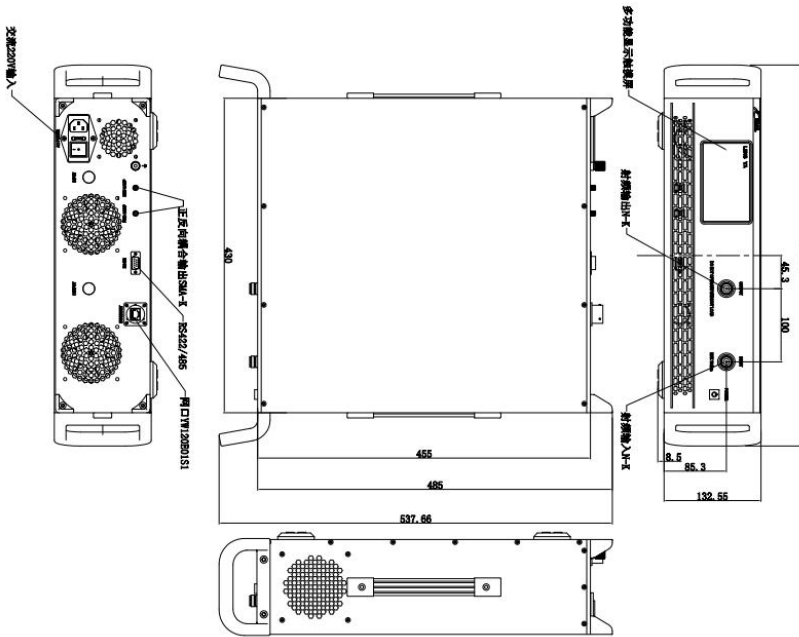

主要功能 Key Features:



参数 Parameter	特点 Advantages
控制Control	RS422/LAN, LCD Screen Display
内置保护功能 Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Over VSWR
控制功能 Control functions	1, Power On/Off 2,RF On/Off 3,Gain Adjustment
冷却系统 Cooling system	Built in Cooling system,forced air cooling

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号 Revision
TLPA18G40G-43-43-BC	Solid State High Power Amplifier Systems 18-40GHz,Gain:43dB,Psat:43dBm,220V AC,Built in Fan Cooling	Rev.1.0

实测数据 Measured data:

1. 增益 Gain

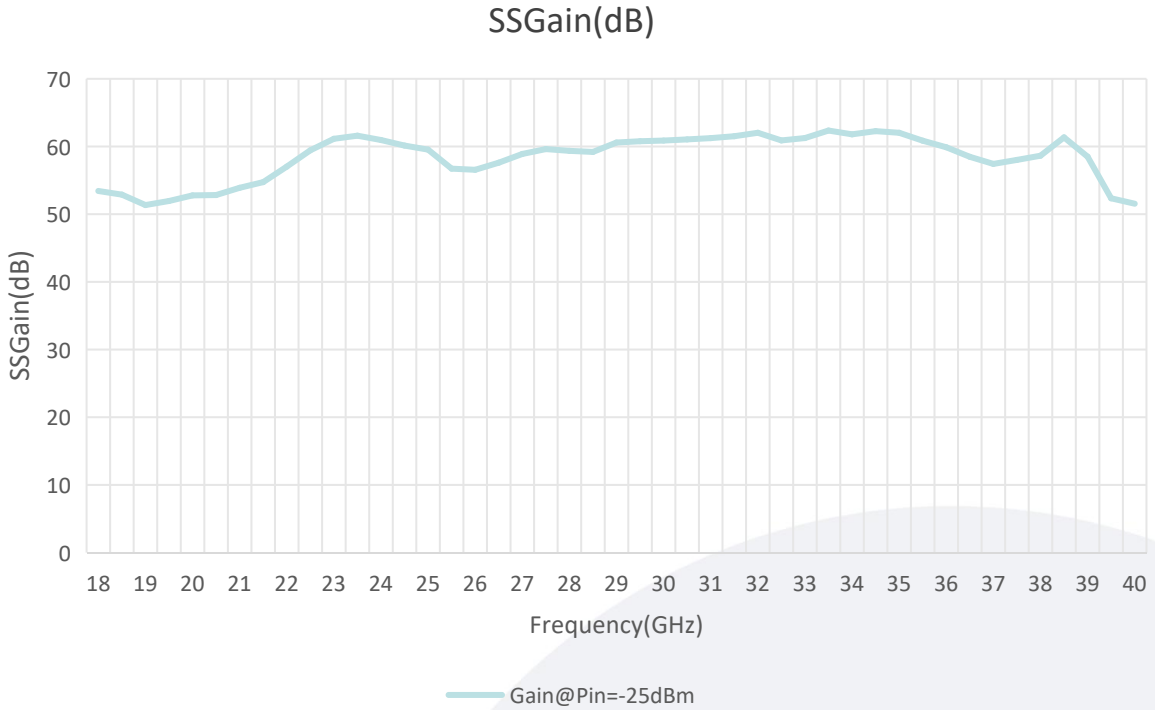


2. 输出功率 Output Power

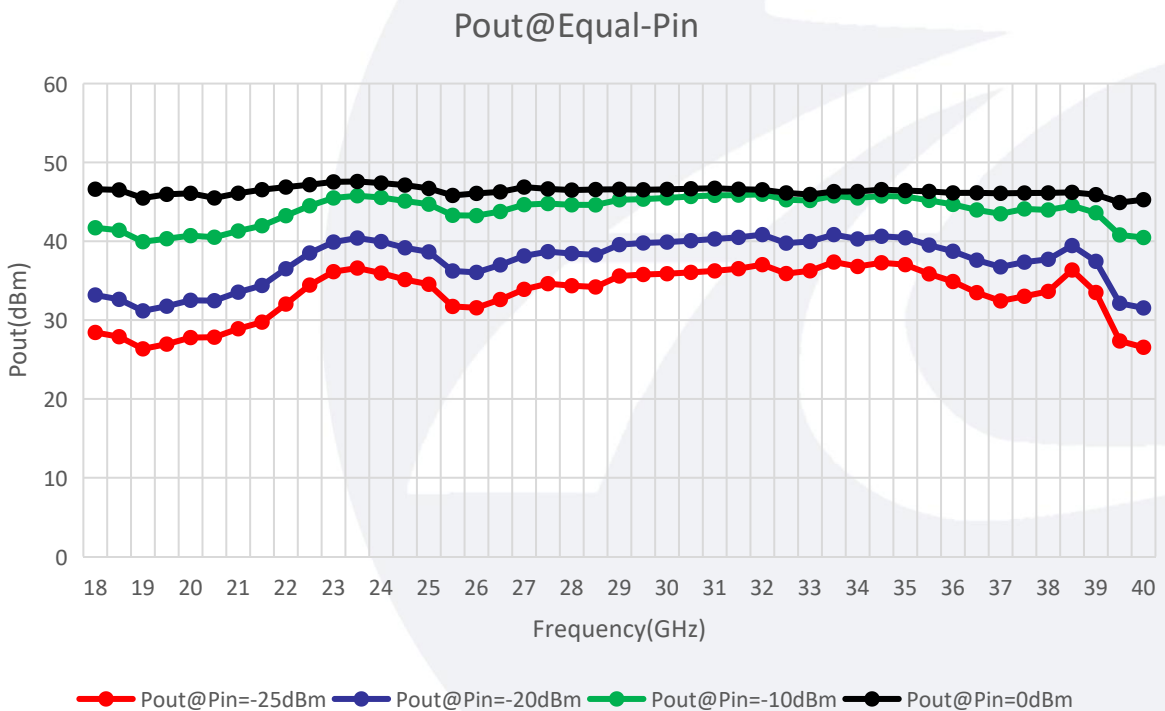

实测数据 Measured data:


3. 杂散抑制 Spurious

Spur@Pout=43dBm

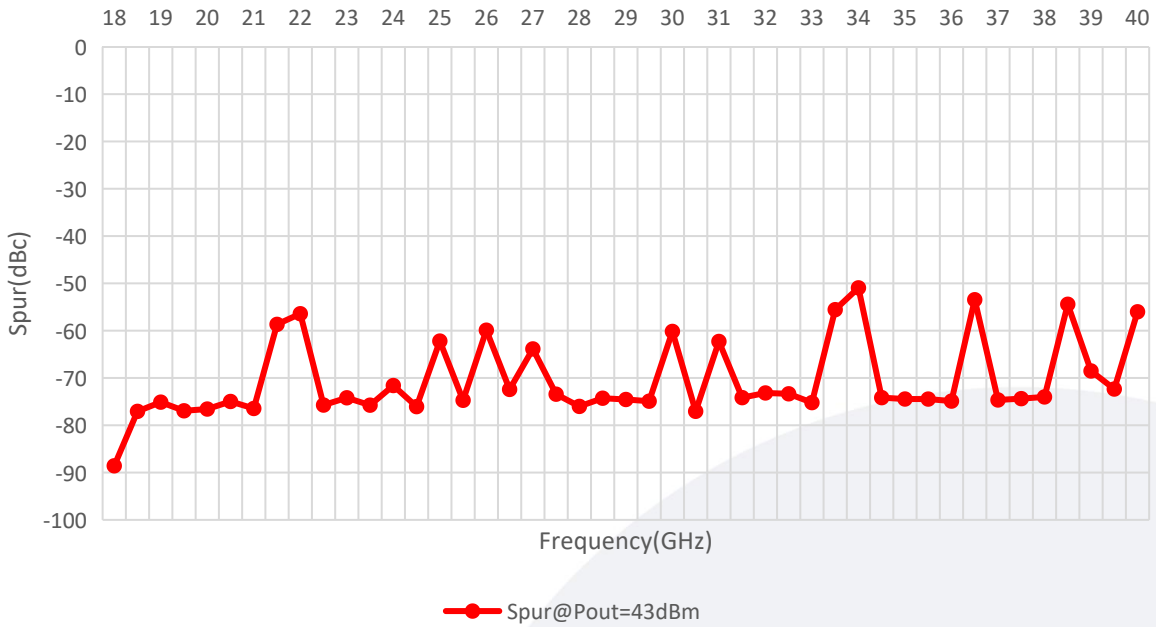

4. 谐波 Harmonic

Harmonic@Pout=43dBm

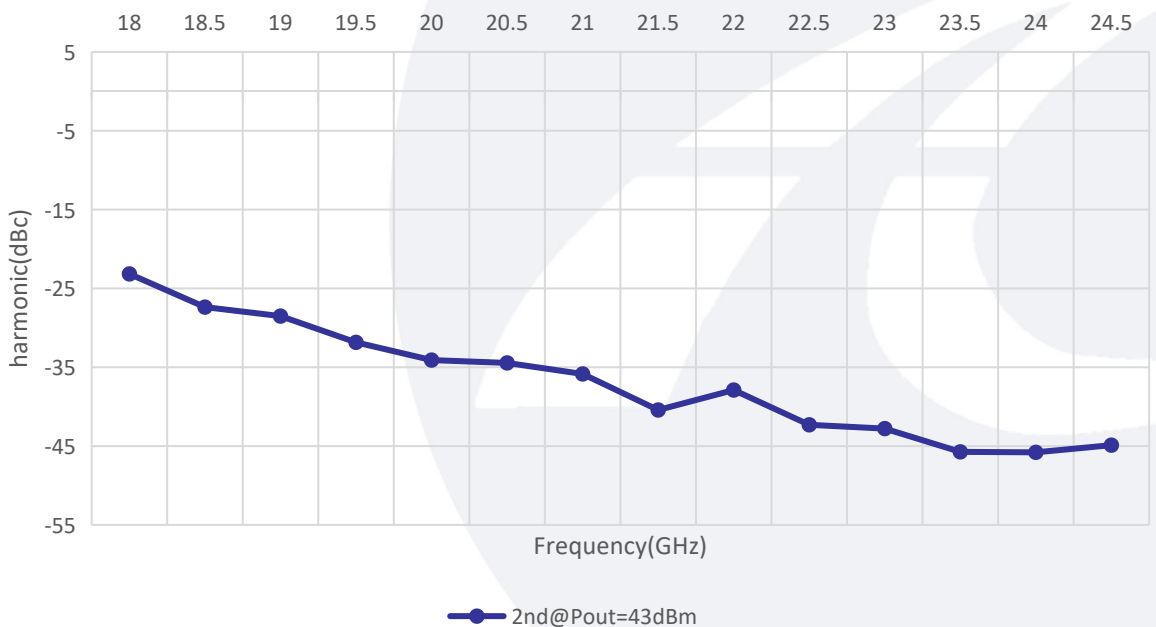

实测数据 Measured data:

5. 功耗 Power Dissipation

Power dissipation

