

Part No: TLLF-DC-300M-L2


Low Pass Filters

电气特性 ELECTRICAL:

Parameter	Min.	Typ.	Max.	Units
Frequency range	DC		300	MHz
Insertion Loss			1.5	dB
Pass band Ripple			1.0	dB
VSWR			1.5	M v
Rejection	>45dB@400-800Mhz			
Power Handling			2	Watts
	本产品带隔直电容，电感无法直通			
Operating Temperature	-40		+70	°C
Impedance	50			Ohms
Input / Output Connector	3.5-Female/3.5-Memale			

外形尺寸Outline Drawing:

Unit: mm

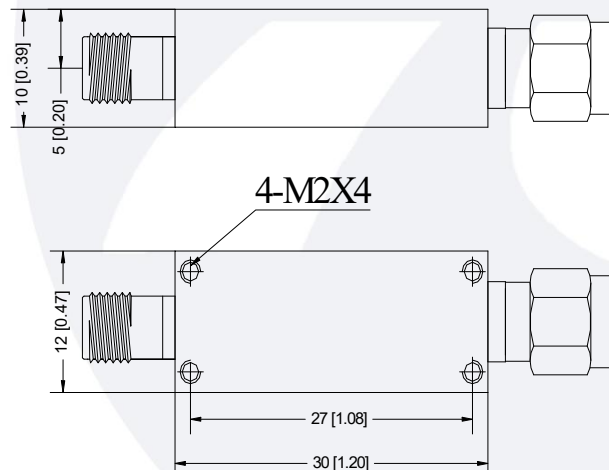

典型曲线 Typical Performance Date:

Trc1 **S11** SWR 200 mU/ Ref 1 U Cal
Trc2 **S21** dB Mag 10 dB / Ref 0 dB Cal
Trc3 **S12** dB Mag 10 dB / Ref 0 dB Cal
Trc4 **S22** SWR 200 mU/ Ref 1 U Cal

1 of 1 (Max)

