

**Model:TLPA27.5G30G-50-50-BC**
**Solid State High Power Amplifier Systems  
 27.5-30GHz,Gain:50dB,Psat:50 dBm,220V AC**
**Feature:**

- Wide Band: 27.5-30GHz
- Gain: 50dB Min
- Psat Output Power:50dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

**电气特性 Electrical Specifications:**

参数Parameter	代码Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	27.5-30			GHz
小信号增益 Small Signal Gain	SSGP	50			dB
增益平坦度 Gain flatness	$\Delta$ GL	$\pm 1.5$ @Bandwidth=200MHz			dB
增益稳定度 Gain Stability	Gstb	$\pm 3$ @Full temperature range			dB
饱和输出功率 Output Psat	Psat	50	51		dBm
三阶互调 Output IM3	IM3		-30	-25	dBc
杂散 Spurious@Pout=46dBm	Spur			-60	dBc
噪声功率谱密度 Noise PSD	ND	-90			dBm/Hz
输入驻波 Input VSWR	VSWRin			1.5	:1
输出驻波 Output VSWR	VSWRout		1.5	1.8	:1
交流电压 AC Voltage	Vac		220		V AC
功耗 Power Consumption	Pdiss	1200@Max			W
阻抗 Impedance	I/O-IMP	50			Ohms

**机械特性 Mechanical Specifications:**


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input /Output Connector	2.92 Female/WR-28	
正向耦合 Forward Coupling	2.92 Female	
尺寸 Size	300*208*185	mm
重量 Weight	$\leq 25$	Kg

**绝对最大值 Absolute Maximum Ratings:**

参数 Parameter	指标 Value
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

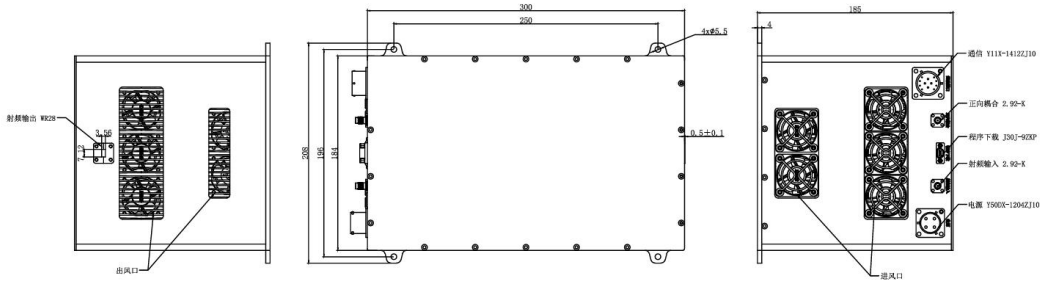

主要功能 Key Features:



参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off
监控功能 Monitor functions	Operating voltage, current, temperature, transmitting power and reflection power
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
监控和控制 Remote control	RS422/LAN
冷却系统 Cooling system	Built in Cooling system, forced air cooling

**温度环境 Environmental Conditions:**

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+55	°C
存储温度 Non-operating Temperature	-55		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description	版本号 Revision
TLPA27.5G30G-50-50-BC	Solid State High Power Amplifier Systems 27.5-30GHz, Gain:50dB, Psat:50 dBm, 220V AC, Built in Fan Cooling	Rev.1.0