

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~40GHz
Dielectric Withstanding Voltage	500V
VSWR	1.25Max
Insertion Loss	≤0.50dB
Operating Temperature	- 55~+125℃

Material & Coat-Plating

Inner Conductor	BE-CU, Gold Plated
Dielectric	PTFE&PEI
Body	BE-CU, Gold Plated&Stainless Steel, Passivated

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN

CHK

Suzhou Talent Microwave, Inc

Unit
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
 0 PLC ±0.25
 1 PLC ±0.15
 2 PLC ±0.12
 3 PLC ±
 3 PLC ±
 ANGLES ±1°

APVD

PRODUCT SPEC

APPLICATION SPEC

Product Model

 2.92/SMP-KKG
 2.92mm Female to SMP Female adaptor

MATERIAL
SEE TABLE

FINISH
SEE TABLE

WEIGHT


SIZE
A4

GAGE CODE
0T8L4


DRAWING NO

CUSTOMER DRAWING

SHEET 1 OF 1 RVE 1

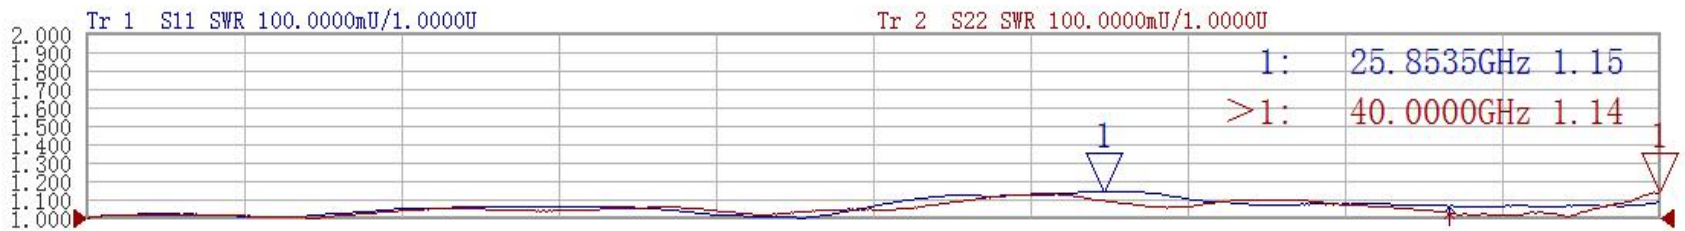

1 通道1 起始:10.0000MHz -- 终止:40.0000GHz

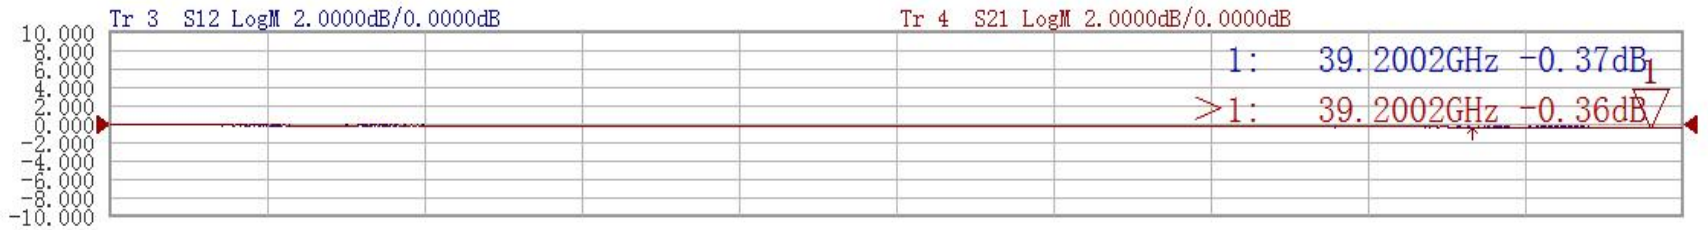

2 通道1 起始:10.0000MHz -- 终止:40.0000GHz

	扫描类型	起始频率 (GHz)	终止频率 (GHz)	扫描点数	中频带宽 (Hz)	扫描时间 (s)	端口1,2功率 (dBm)
通道1	线性扫描	0.010000000	40.000000000	801	1000	0.779105	-5.00, -5.00