

A40 series ultra low loss phase stabilized cable assembly




Product Specification

Product Mode

A40-NMNM-L-AP

Sketch Map:

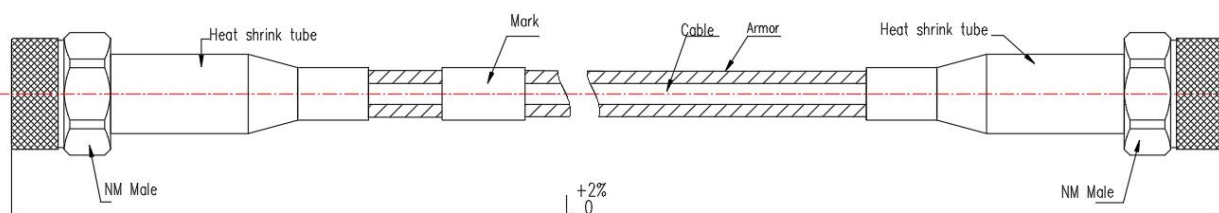

Length (Lm)	0.5	1	1.5	2	2.5	3	4	5
Allowance (mm)	10	20	30	40	50	60	80	100
Insertion Loss (dB)	≤1.26	≤2.09	≤2.92	≤3.76	≤4.59	≤5.42	≤7.09	≤8.76

Electrical & Mechanical Characteristics

Impedance	50 Ohm
Operating Frequency	DC-18GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.25:1
Insertion Loss	See Typical Product Tabulates
Shielding Effectiveness	90 dB
Velocity	83%
Min. Bending Radius Static	18 mm
Operating Temperature	-55~+85℃
Cable Diameter	3.6mm
Armor diameter	9mm

Material&Coat-Plating

Cable Jacket	FEP
Cable Armor	Stainless steel Torsion and tension resistance spring waterproof PVC
Connector Body	Stainless Steel,Passivated
Connector Contact	Brass,Gold
Connector Nut	Stainless Steel,Passivated
Connector Insulators	PTFE

Suzhou Talent Microwave Inc.

Website: <http://www.talentmw.com>
 Phone: +86-512-65001597
 E-mail: sales@talentmw.com