

Model:TLPA3.1G3.4G-68-68-P-BC
**Solid State High Power Amplifier Systems
 3.1-3.4GHz,Gain:68dB,Psat:68 dBm,380V AC**
Feature:

- Wide Band: 3.1-3.4GHz
- Gain: 68dB Min
- Psat Output Power:68dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	代码Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	3.1-3.4			GHz
功率增益 Power Gain@Pout=68dBm	SSGP	68			dB
增益平坦度 Gain flatness	Δ GL		± 3		dB
饱和输出功率 Output Psat	Psat	68			dBm
杂散 Spurious@Pout=65dBm	Spur			-60	dBc
谐波 Harmonics@Pout=65dBm	HAM			-20	dBc
调制信号电平 Modulation Signal Level	TTL	0		5	V
调制频率 Modulation Frequency	MF	1		100	KHz
脉冲宽度 Pulse Width	T	0.3		500	us
占空比 Duty Cycle	τ	0.1		20	%
上升/下降沿 Rise/Fall Time	Tr		50	100	ns
顶降 Pulse Drop@T=100us	Pdrop		0.5	1	dB
输入驻波 Input VSWR	VSWR		1.5	2	:1
交流电压 AC Voltage	Vac		380		V AC
功耗 Power Consumption	Pdiss		6000		W
阻抗 Impedance	I/O-IMP		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input /Output Connector	N Female/7/16 Din Female	
正向/反向耦合 Forward/Reverse Coupling	SMA Female/SMA Female	
通信接口 Communication Connector	DB9/RJ-45	
尺寸 Size	19 Inch 11U*880 depth	mm
重量 Weight	≤ 100	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

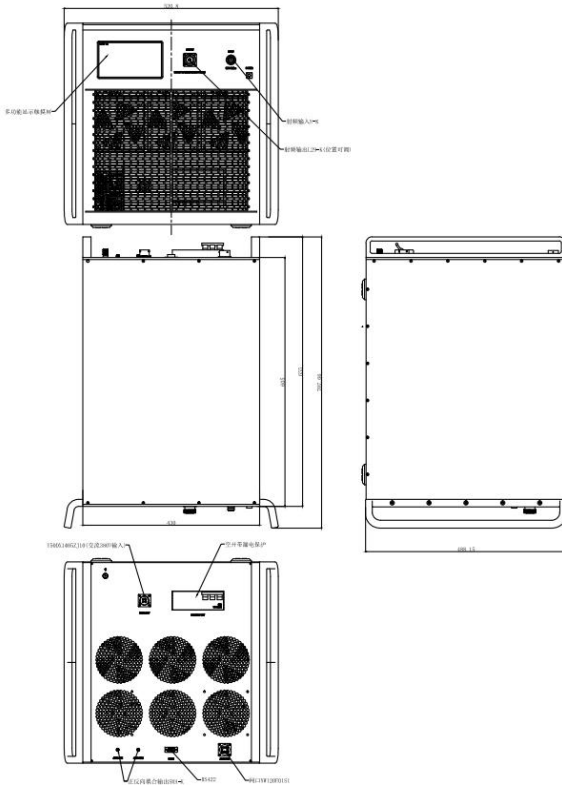

主要功能 Key Features:



参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off 2,ALC automatic level control
内置保护功能 Protection functions	1,Over TEM 2,Over voltage 3,Over current protection 4,Over VSWR
监控和控制 Remote control	RS422/Ethernet
冷却系统 Cooling system	Built in Cooling system,forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA3.1G3.4G-68-68-P-BC	Solid State High Power Amplifier Systems 3.1-3.4GHz,Gain:68dB,Psat:68 dBm,380V AC,Built in Fan Cooling	Rev.1.0