

Part No.: RS4DC180-SE

Power Splitter/Combiner 4 Way SMA 50Ω DC to 18 GHz

电气特性 Electrical:

工作频率 Frequency Range: DC-18 GHz

插入损耗 Insertion Loss: $\leq 12 \pm 3\text{dB}$

驻波 VSWR: $\leq 1.70: 1$

幅度平衡 Amplitude Balance: $\leq \pm 0.9\text{dB}$

相位平衡 Phase Balance: $\leq \pm 12^\circ$

耐功率 Power Handling: 0.5 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-55^\circ \text{C} - +85^\circ \text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

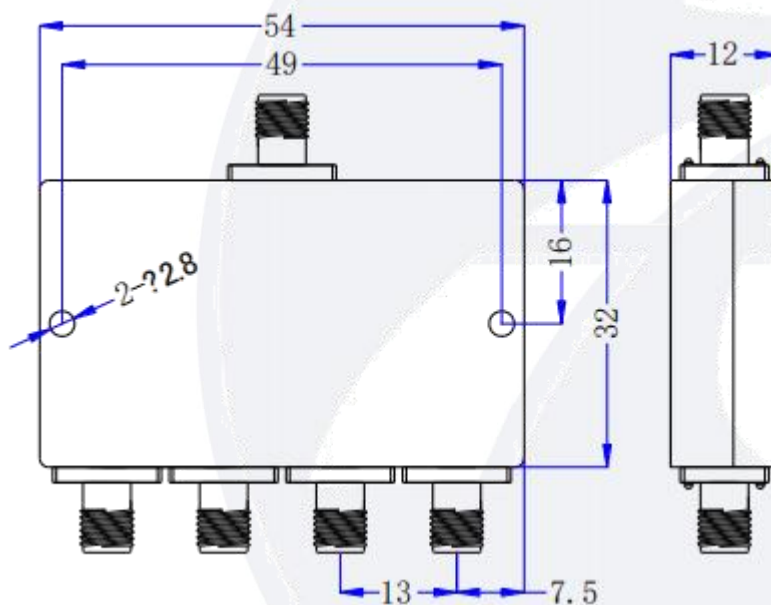

典型曲线 Typical Performance Data:

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize



System

Print

Printer Setup...

Invert Image

ON

Dump

Screen Image...

USB Switch

Setup

Misc Setup

Backlight

ON

Firmware

Revision

Service Menu

Help

Return