

Model:TLPA6G18G-53-53-BC
**Solid State High Power Amplifier Systems
 6-18GHz,Gain:53dB,Psat:53dBm,220V AC**
Feature:

- Wide Band: 6-18GHz
- Gain: 53dB Min
- Psat Output Power:53dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	代码 Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	6-18			GHz
功率增益 Power Gain	GP	53			dB
增益平坦度 Gain flatness	Δ GL		± 3.5	± 5	dB
线性输出功率 Output P1dB	P1dB	50	51		dBm
饱和输出功率 Output Psat	Psat	53	54		dBm
杂散 Spurious@Pout=53dBm	Spur			-50	dBc
谐波 Harmonics@Pout=53dBm	HAM			-15	dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac	200	220	240	V AC
功耗 Power Consumption	Pdiss			3200	W
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input/Output Connector	N Female/WRD500	
正向/反向耦合 Forward/Reverse Coupling	SMA Female/ SMA female	
通信接口 Communication Connector	DB9/RJ45	
液晶显示屏 Front Panel LCD Screen Display	7 inch LCD Screen Display	
尺寸 Size	19 Inch 5U*550	
重量 Weight	≤ 35	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

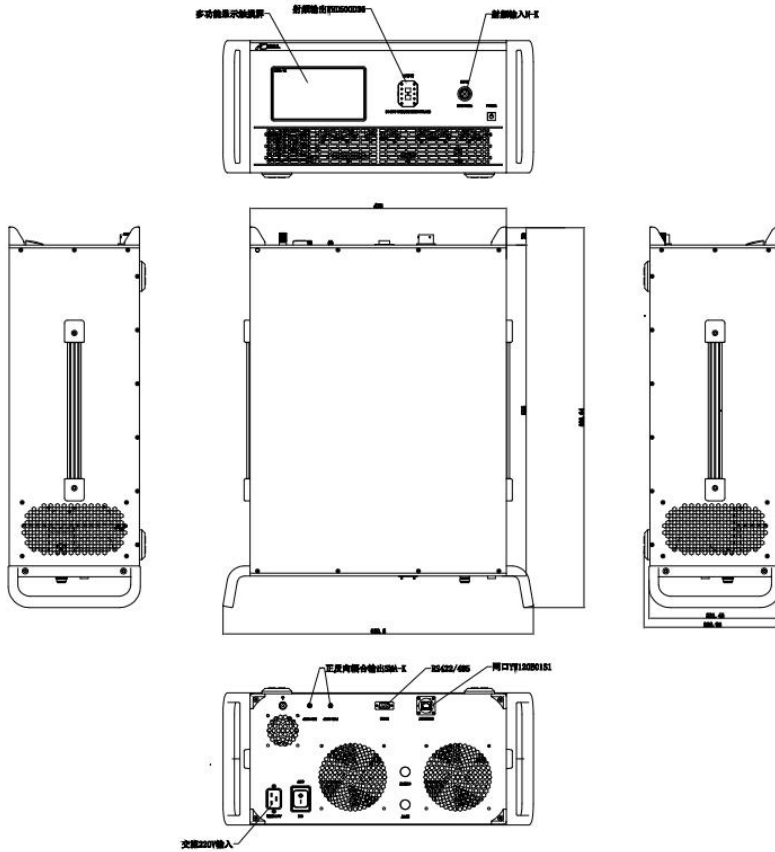

主要功能 Key Features:



参数 Parameter	特点 Advantages
控制 Control	RS422/Ethernet, LCD Screen Display
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR
控制功能 Control functions	1, Power setting On/Off 2, Gain control.
冷却系统 Cooling system	Built in Cooling system, forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-20		+40	°C
存储温度 Non-operating Temperature	-30		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA6G18G-53-53-BC	Solid State High Power Amplifier Systems 6-18GHz, Gain:53dB, Psat:53dBm, 220V AC, Built in Fan Cooling	Rev.1.0

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

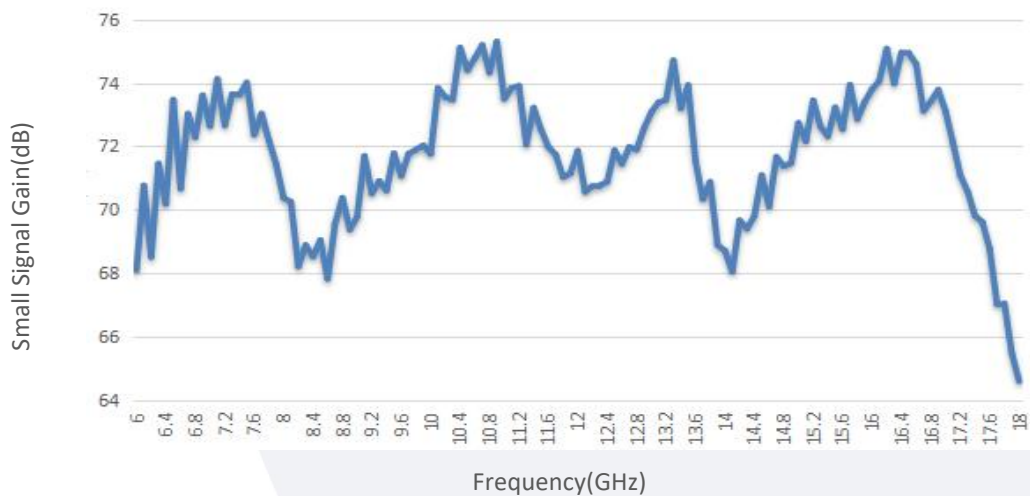


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

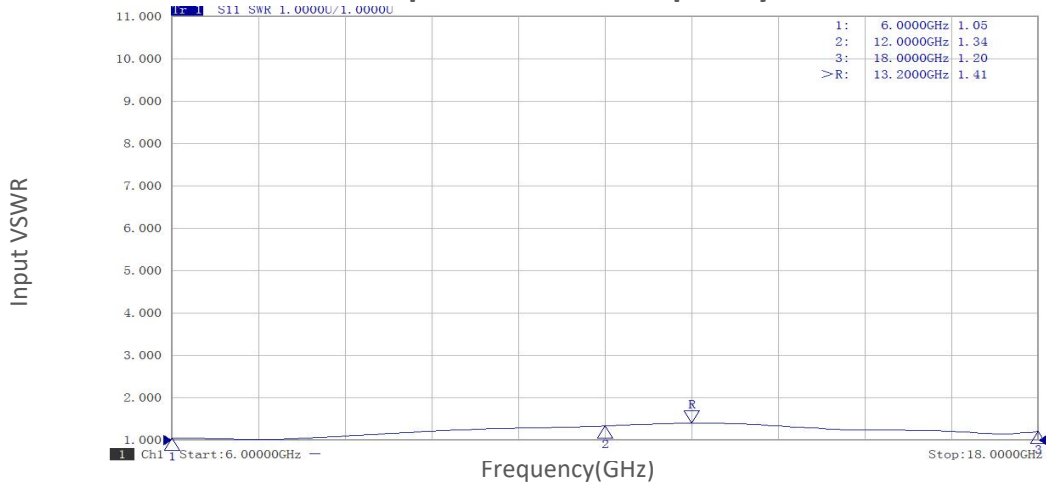

P1dB vs Frequency

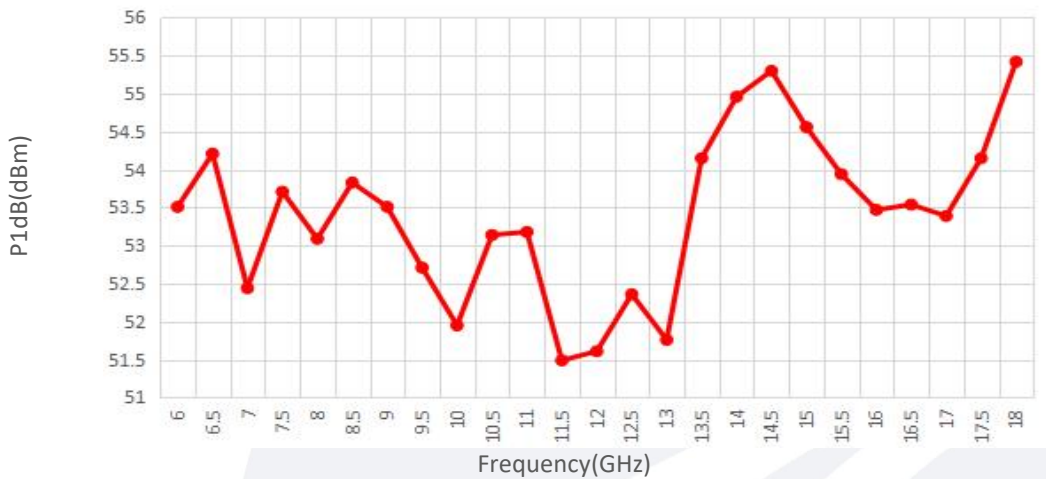


Pout@Pin

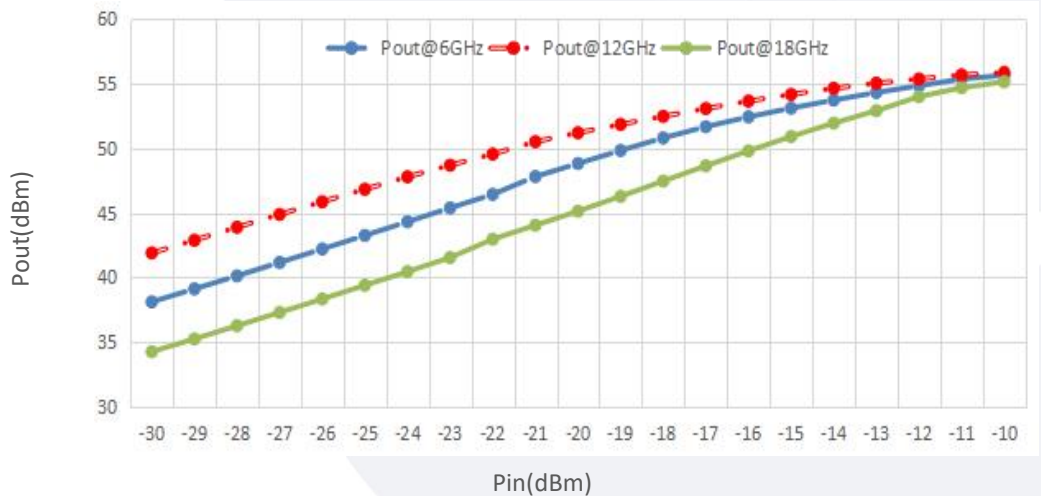


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Pout@Equal_Pin

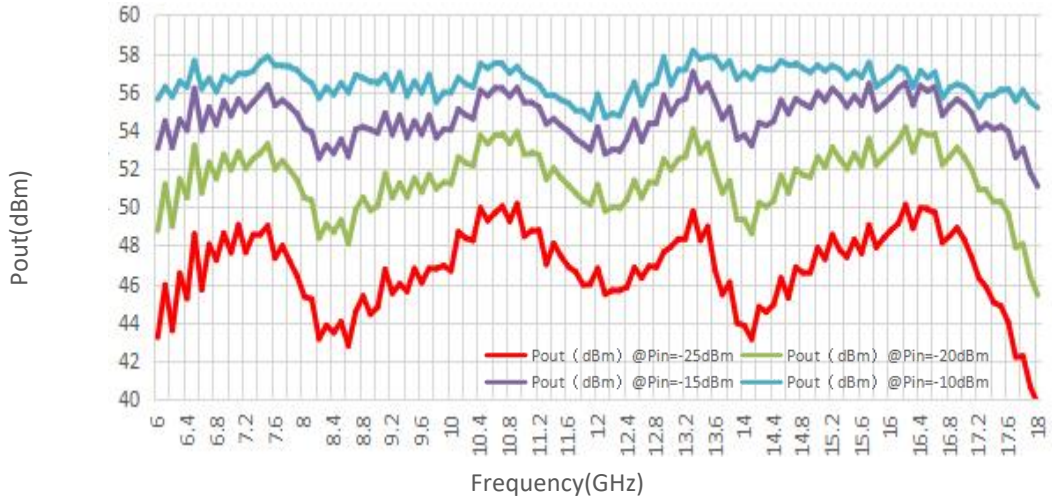

Harmonics vs Frequency

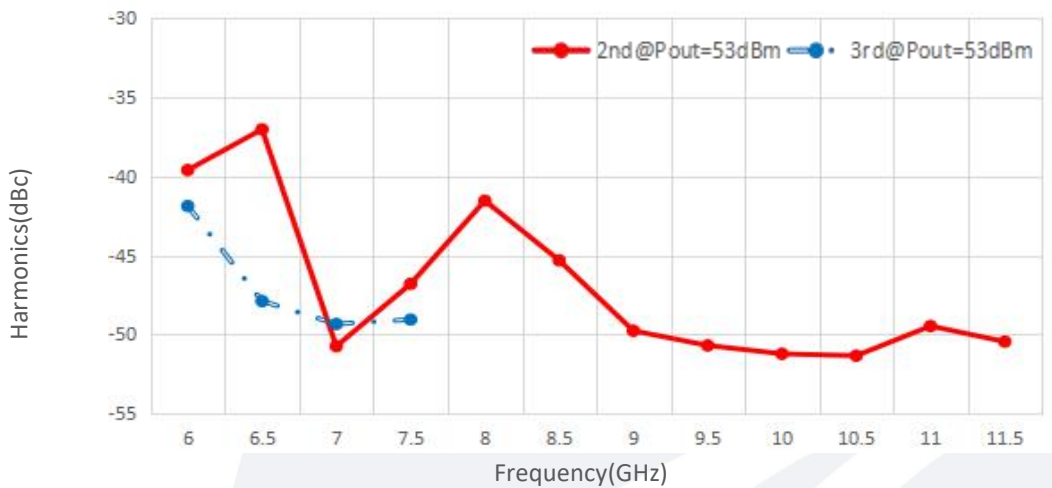

Spurious vs Frequency

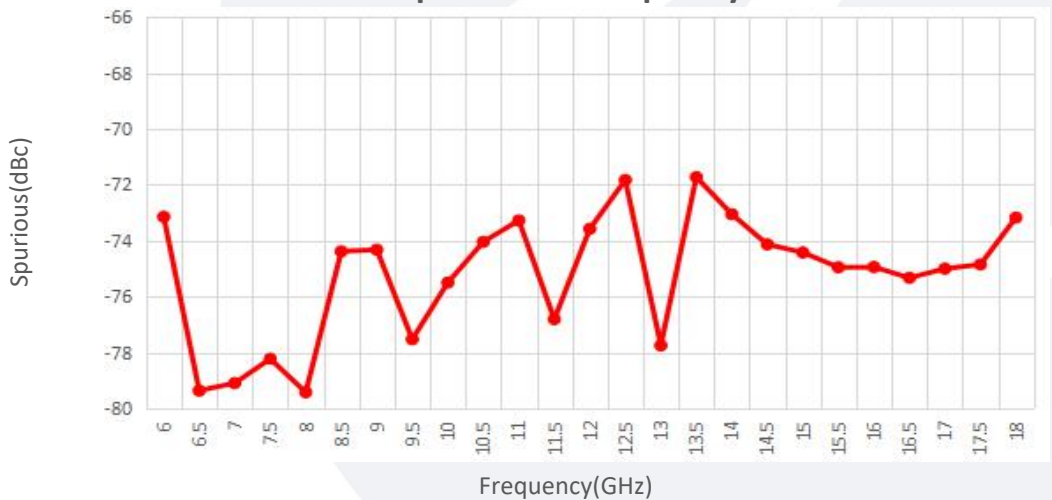

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.