

Part No.: TC-0460-20S

20dB Directional Coupler SMA-Female 50Ω 0.4-6 GHz

电气特性 Electrical:


工作频率 Frequency Range: 0.4-6GHz
 耦合度 Coupling:: 20 ± 1.5db
 插入损耗 Insertion Loss: 0.8db typ, 1.0db max
 方向性 Directivity: ≥ 12db
 驻波 VSWR: 1.5 max
 耐功率 Power Handling: 50 Watt
 阻抗 Impedance: 50 OHMS

机械特性 Mechanical:

温度范围 Temperature Range: -45° C - +85° C
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:


Unit: mm

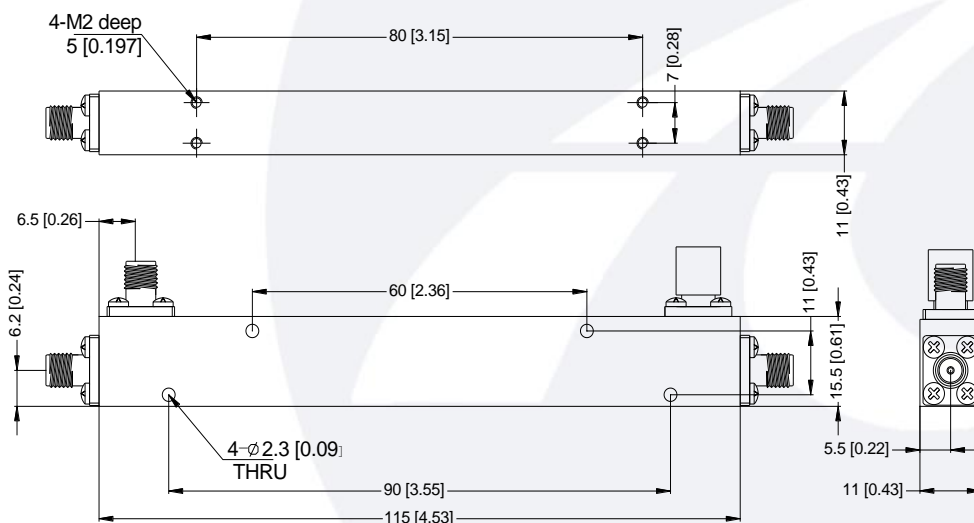

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

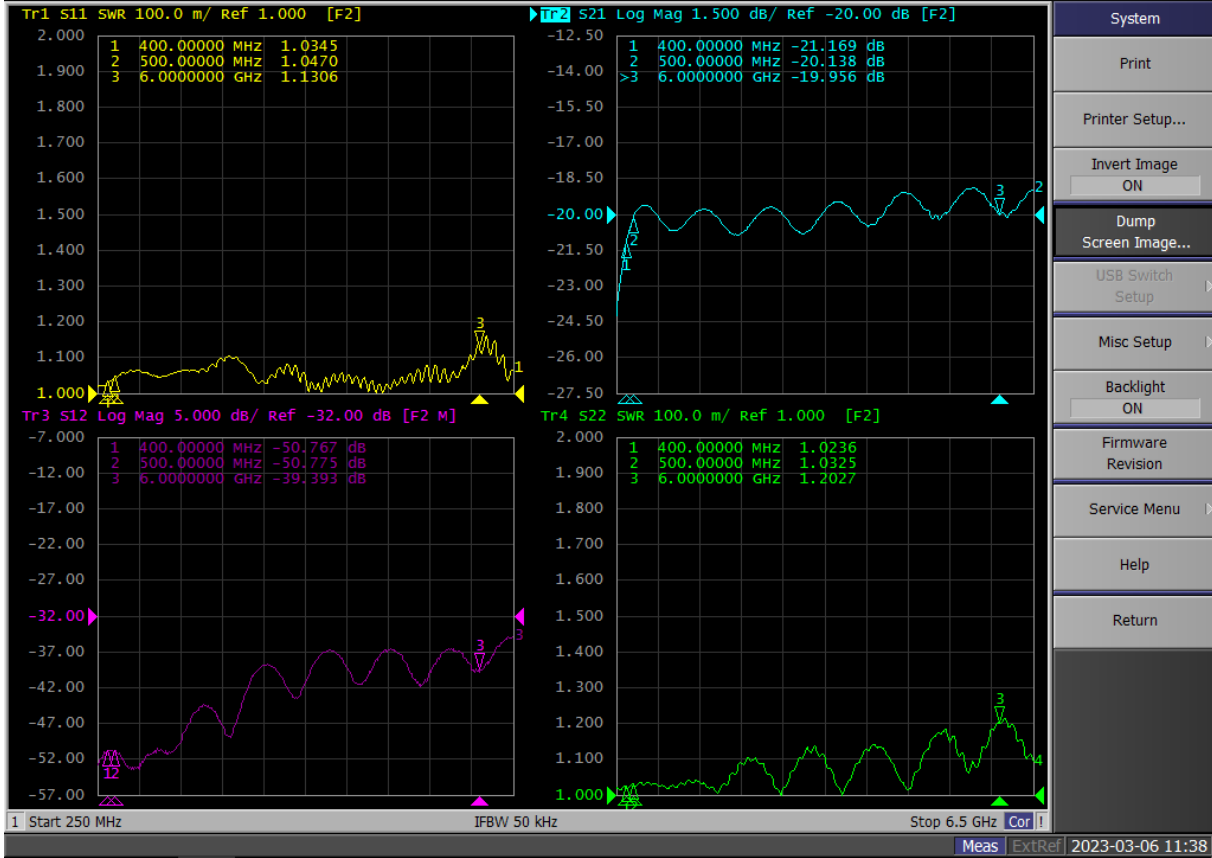

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

