

Model: TLLA50K40G-38-50
**Low Noise Amplifier , 50KHz-40GHz, NF:5.5dB,
Gain:38dB,P1dB:14dBm**
Feature:

- Ultra Wide Band: 50KHz-40GHz
- Gain: 38dB Typ
- Noise Figure: 5.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	50KHz-40GHz			
增益 Gain	36	38		dB
增益平坦度 Gain Flatness		±2.5		dB
噪声系数 Noise Figure		5.5		dB
线性输出功率 Output P1dB	@10MHz-40GHz	14		dBm
	@40-50GHz	9		dBm
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		6	12	V DC
直流电流 DC Supply Current		180		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	35*40*12	mm
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


**Available 220V System
Benchtop Amplifier**

外形尺寸 Outline Drawing:

Unit: mm

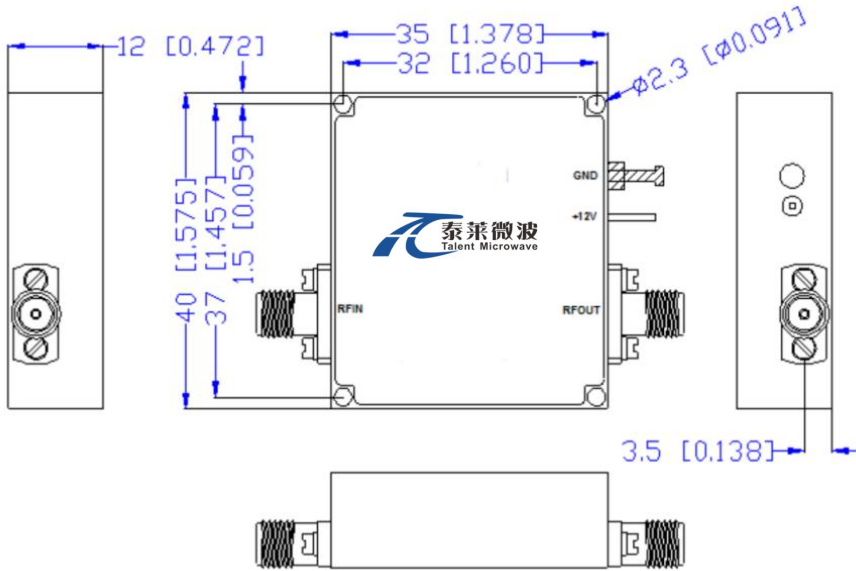

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号 Revision
TLLA50K40G-38-50	Low Noise Amplifier,50KHz-40GHz, Noise Figure:5.5dB, Gain:38 dB,P1dB:14dBm,+6V DC,Without Heatsink	Rev.1.1
TLLA50K40G-38-50-HS	Low Noise Amplifier, 50KHz-40GHz, Noise Figure:5.5dB, Gain:38 dB,P1dB:14dBm,+6V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Gain&VSWR vs Frequency



Gain&VSWR vs Frequency

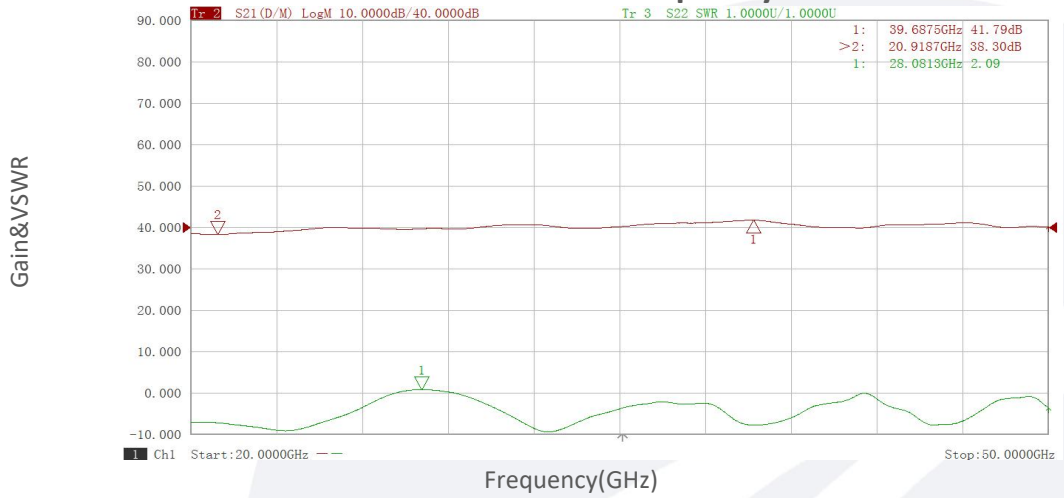


Noise Figure vs Frequency

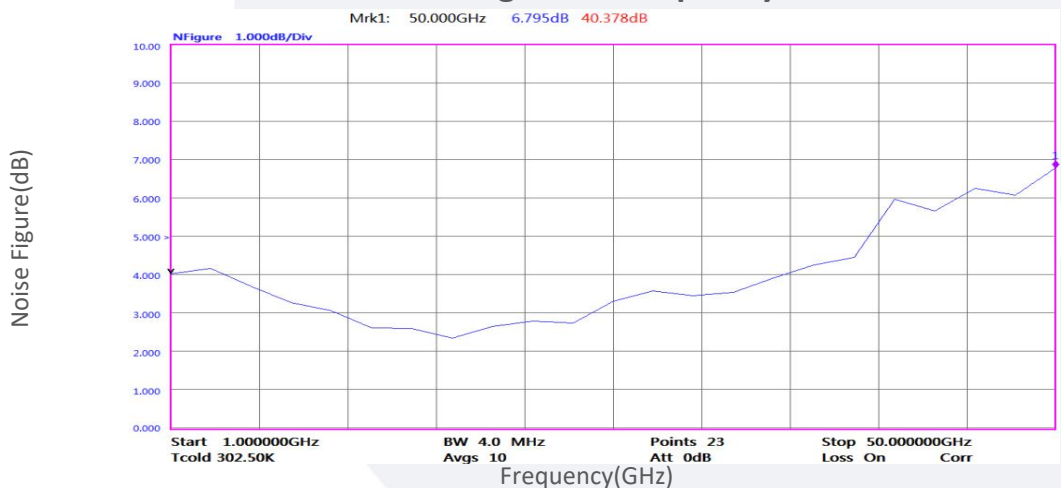


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Gain vs Output Power

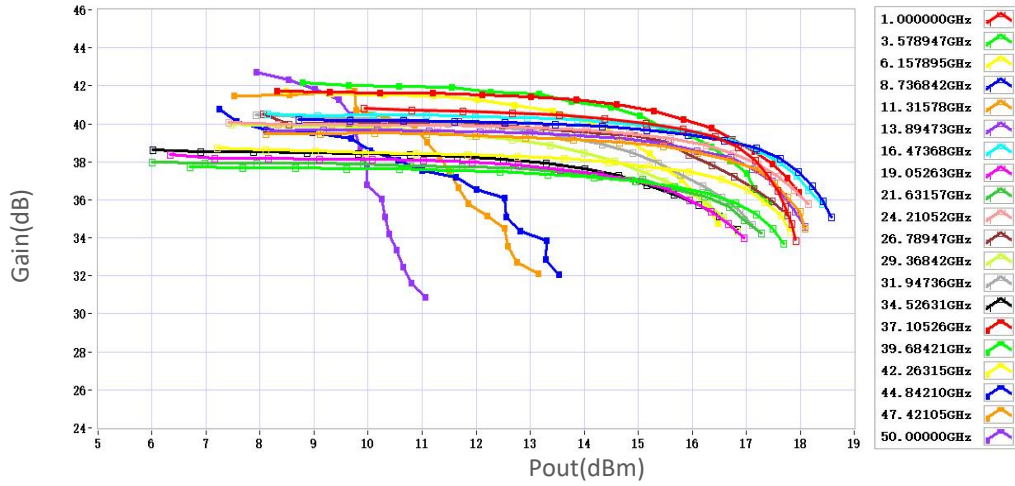

P1dB vs Frequency

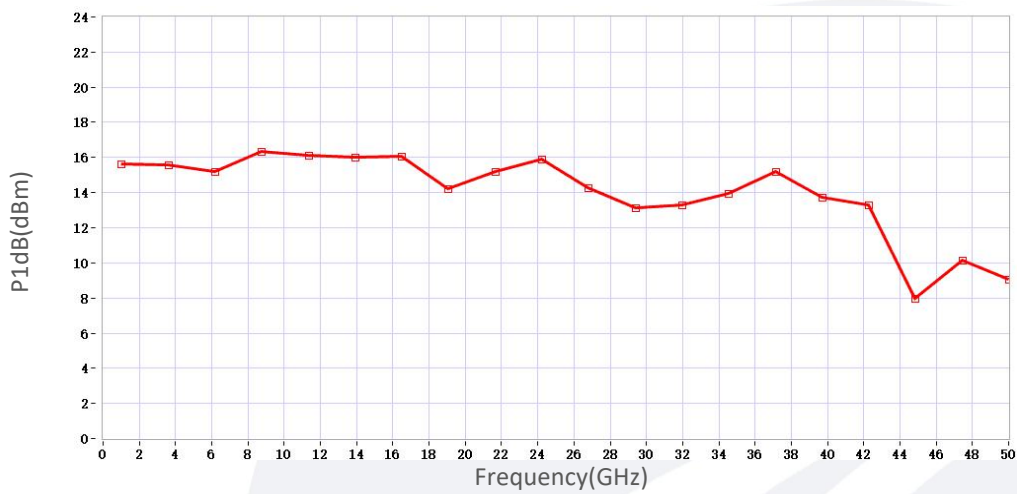

P3dB vs Frequency

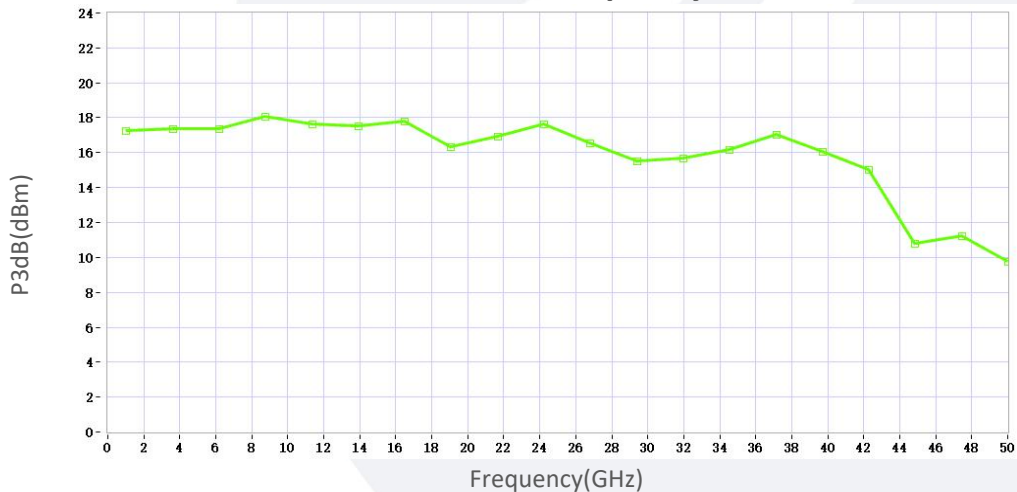

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.