

Model:TLPA40G50G-36-35-BC
**Solid State High Power Amplifier Systems
 40-50GHz,Gain:35dB,Psat:36 dBm,220V AC**
Feature:

- Wide Band: 40-50GHz
- Gain: 35dB Min
- Psat Output Power:36dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	代码Symbo	Min	Typ	Max	单位Units
频率范围 Frequency range	BW	40-50			GHz
功率增益 Power Gain	GP	35	36		dB
饱和输出功率 Output Psat	Psat	36			dBm
杂散 Spurious@Pout=36dBm	Spur			-50	dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac		220		V AC
功耗 Power Consumption	Pdiss	120@Max			W
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位Units
输入/输出接口 Input /Output Connector	2.4mm Female/WR 19	
通信接口 Communication Connector	RJ45	
尺寸 Size	320*200*88	mm
重量 Weight	≤5	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

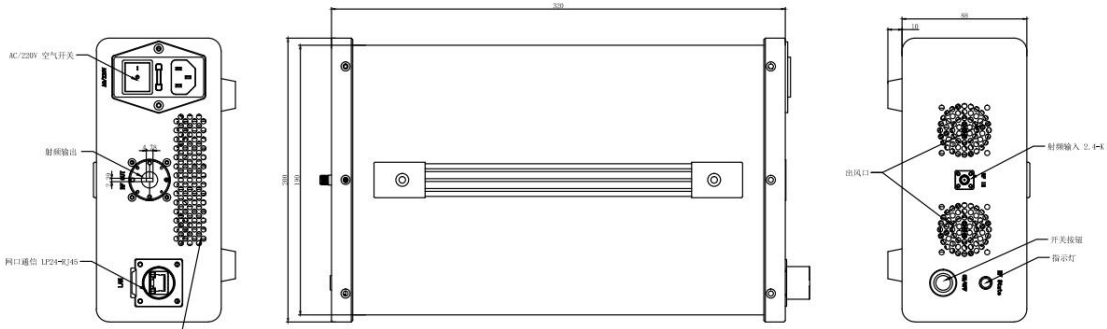

主要功能 Key Features:



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

参数 Parameter	特点 Advantages
控制功能 Control functions	1, Power setting On/Off
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current
监控和控制 Remote control	1, RS422/Ethernet 2, Gain adjust
冷却系统 Cooling system	Built in Cooling system, forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	°C
存储温度 Non-operating Temperature*	-30		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10000			feet
震动 Shock / Vibration(MIL-STD- 810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA40G50G-36-35-BC	Solid State High Power Amplifier Systems 40-50GHz, Gain:35dB, Psat:36 dBm, 220V AC, Built in Fan Cooling	Rev.1.0