


Flexible Ultra Low Loss Coax Cable Assembly

A15/1.0mm Male /1.0mm Male/DC-110 GHz

Model: A15-1.0M1.0M-L

Features:

- Max Frequency 110 GHz
- VSWR : 1.25 Typ
- Velocity : 80%



A15-1.0M1.0M-L
(WITHOUT ARMOR)



A15-1.0M1.0M-L-A
(WITH 4.8MM
DIAMETER ARMOR)


Applications:

- Test & Measurement equipment
- Manufacturing lab
- WAN system equipment

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		110	GHz
VSWR		1.25	1.40	:1
Velocity		80%		
Shielding Effectiveness	90			dB
Capacitance			81	pF/m
Phase Stability Vs. Flexure		±8		°
Amplitude Stability Vs. Flexure		±0.08		dB

Cable Cross Section:

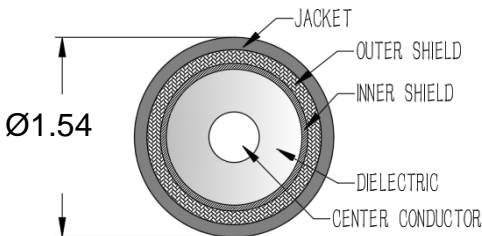

Environmental And Physical Characteristics:

Description	Parameter	Units
Cable Diameter	1.54	mm
Cable Jacket	FEP	
Min. Bending Radius	6	mm
Typical Flex life	50000	
Operating Temperature	-55 to +125	°C
Storage Temperature	-55 to +165	°C


Cable Performance By Frequency

Frequency	1GHz	3 GHz	6 GHz	10GHz	12 GHz	18 GHz	26.5 GHz	40GHz	50 GHz	67GHz	110GHz
Insertion Loss (dB/m Max)	1.07	1.87	2.66	3.46	3.90	4.70	5.75	7.14	8.04	9.40	12.3
RF Power CW (W Max.)	33	19	13	12	11	8.5	6	5	4.0	4	3

Connectors:

Description	Connector 1	Connector 2
Type	1.0mm Straight Male	1.0mm Straight Male
Contact Material And Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material And Plating	Passivated Stainless Steel	Passivated Stainless Steel
Insertion Loss (dB Max)	$0.05 * \sqrt{f_GHz}$	$0.05 * \sqrt{f_GHz}$

Outline Drawing:

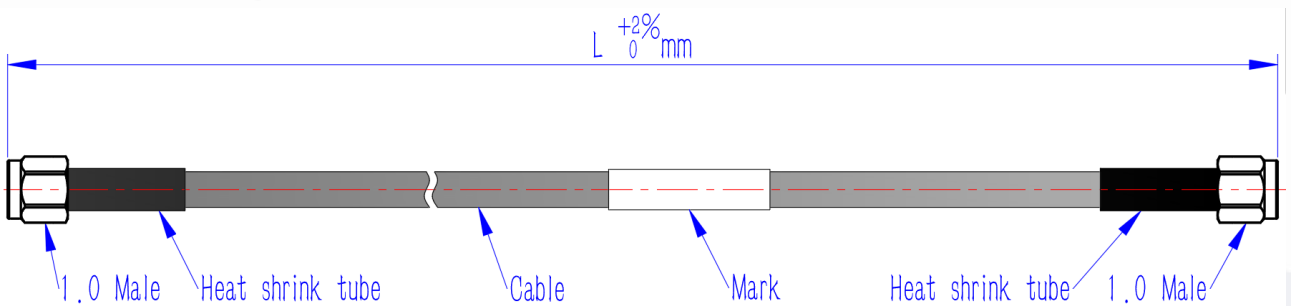


Ordering Information:

Base Number	Lenth (Unit meters)	Armour	Phase/delay Matched
A15-1.0M1.0M	-L	LEAVE BLANK (NOT REQUIRED) -A (with Armor)	LEAVE BLANK (NOT REQUIRED) -XXPS ($\pm XX$ PS) -XX° ($\pm XX^\circ$)


Typical Performance Data:

Model: A15-1.0M1.0M-0.2m

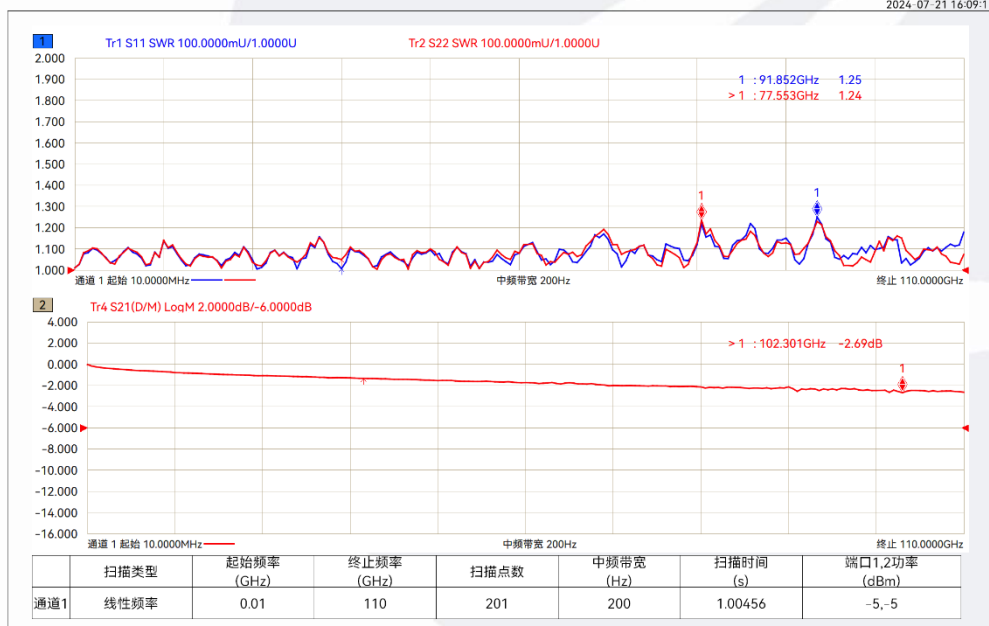


Model:A15-1.0M1.0M-0.3m

2024-07-21 15:35:14

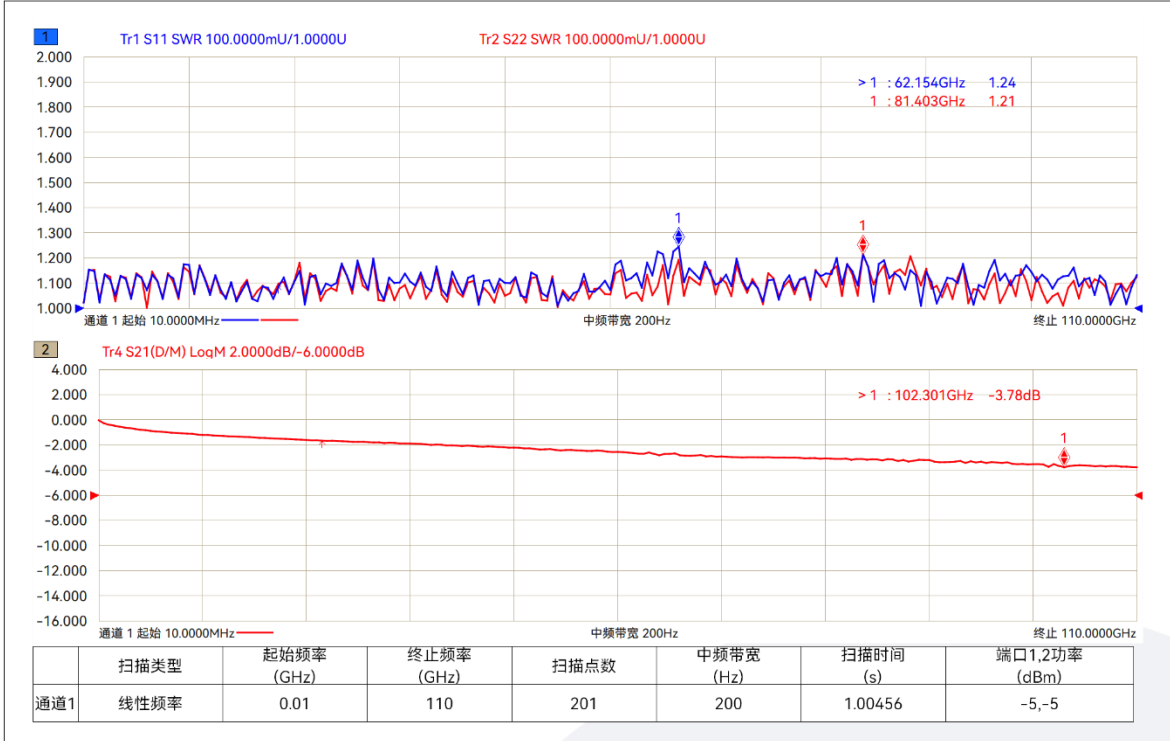



Model:A15-1.0M1.0M-0.4m

2024-07-21 16:15:07

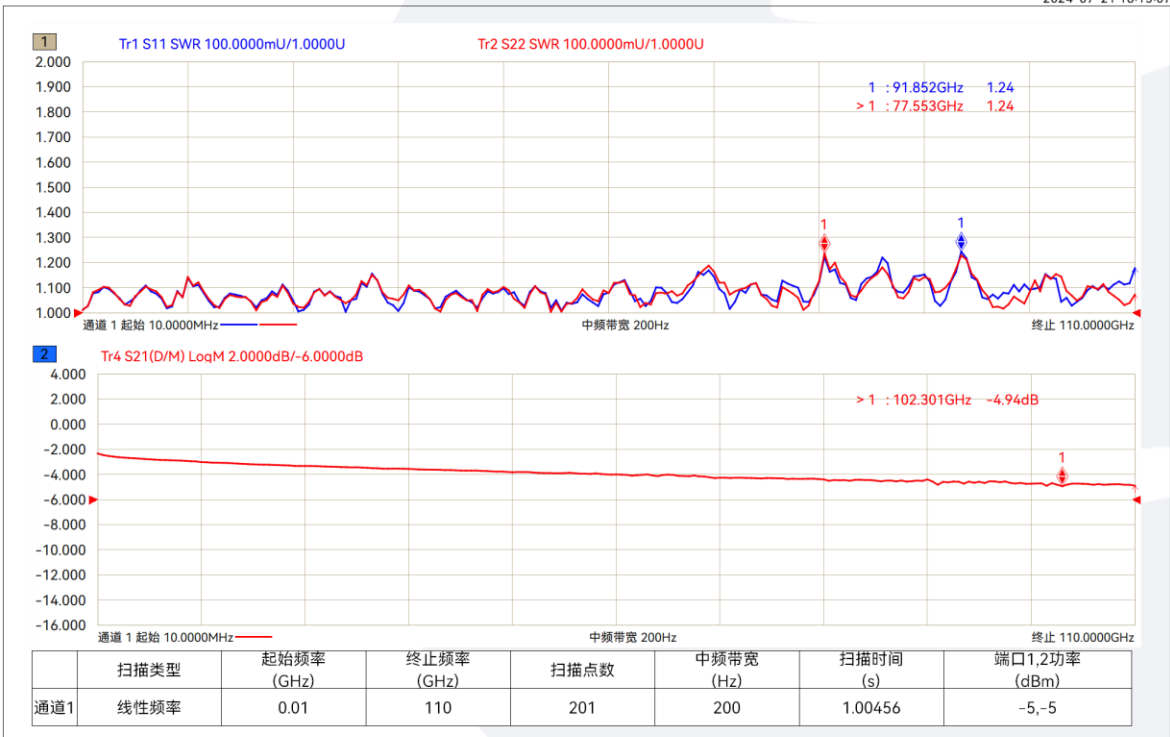

Model:A15-1.0M1.0M-1m

2024-07-17 17:07:04

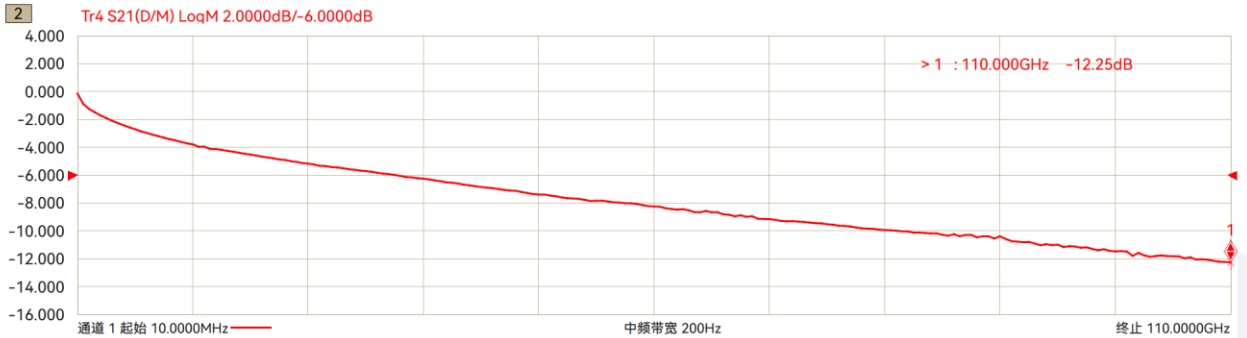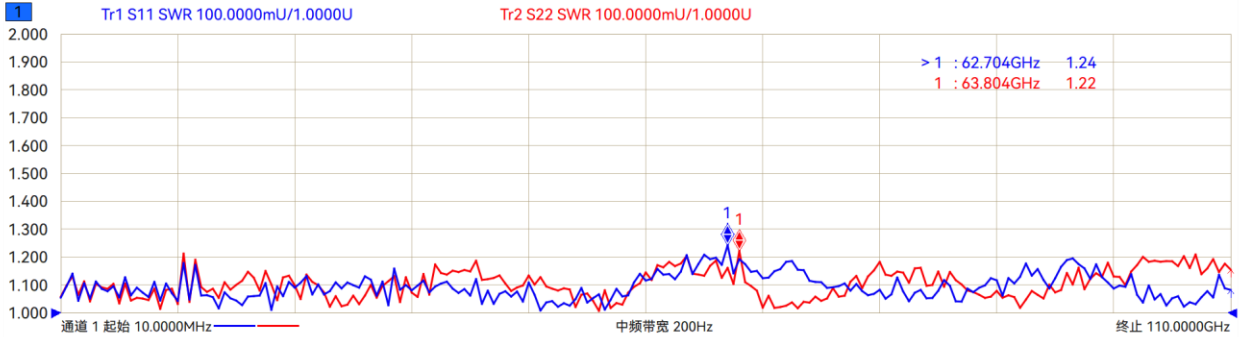

	扫描类型	起始频率 (GHz)	终止频率 (GHz)	扫描点数	中频带宽 (Hz)	扫描时间 (s)	端口1,2功率 (dBm)
通道1	线性频率	0.01	110	201	200	1.00456	-5,-5