

Absorptive, Broadband FET Switch

0.1-18 GHz/SP8T/ SMA Female

Model: TLSP8T0.1G18GA

The TLSP8T0.1G18GA is an absorptive FET switch with a TTL driver that operates between 0.1 and 18 GHz. The SP8T switch offers 70 dB port-to-port isolation with a typical switching speed of 100 ns. The input and output connectors of the switch are SMA female.

Features:

- Ultra Wide Band: 0.1-18GHz
- Low Insertion Loss: 4.0 dB
- Power Handling : 30 dBm
- High Isolation
- Switch Type: Absorptive

Applications:

- Communication Systems
- Automatic Test Equipment
- Switching Network

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		0.1-18		GHz
插损 Insertion Loss		4		dB
隔离 Isolation	60	70		dB
切换速度 Switch Speed		100		ns
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
耐功率 Power Handling			30	dBm
直流电压 DC Voltage		+5		V DC
直流电流 DC Supply Current		500		mA
开关类型 Switch type	Absorptive			
阻抗 Impedance		50		Ohms

绝对最大值 Absolute Maximum Ratings :


描述 Description	参数 Parameter	单位 Units
供电偏置电压 Supply Bias Voltage	±5%	V
射频输入功率 RF Input Power	30	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

机械特性 Mechanical Specifications:

描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流控制接口 Control Bias	Solder Pin	
尺寸 Size	48.48*40.26*9.5	mm

外形图 Outline Drawing:

Unit:mm

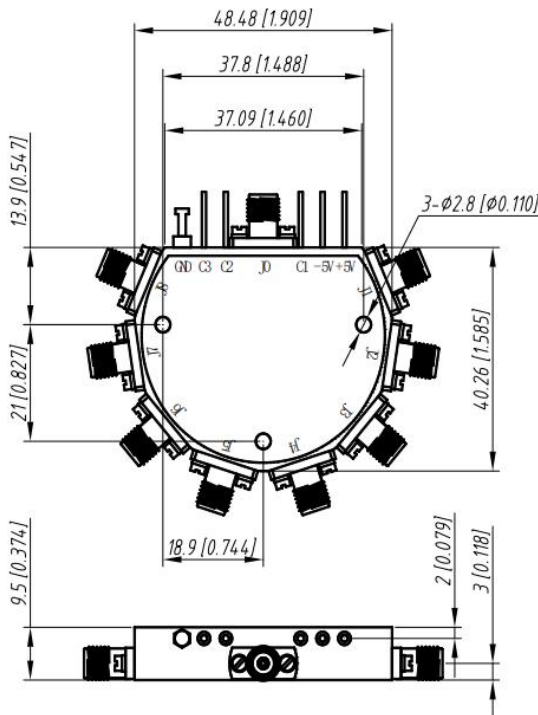

真值表 Truth Table

TTL Control Input			Signal Path
C3	C2	C1	State
0	0	0	J0-J1
0	0	1	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4
1	0	0	J0-J5
1	0	1	J0-J6
1	1	0	J0-J7
1	1	1	J0-J8



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

TTL Control Voltages &VDD

Stage	Bias Condition
VDD	+5V (± 5%)
Low (0)	0 to 0.8Vdc
High (1)	2.0 to +5.0Vdc

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLSP8T0.1G18GA	Absorptive, Broadband FET Switch 0.1-18 GHz, SP8T, SMA	Rev.1.1

典型曲线 Typical Performance Data:


Insertion Loss&VSWR vs Frequency

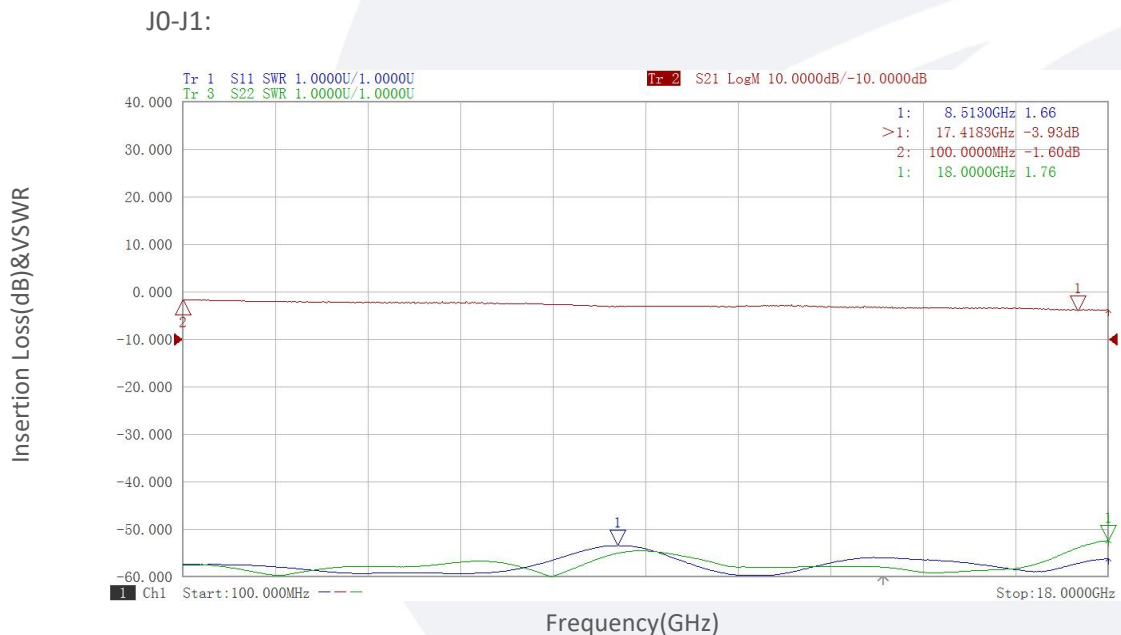


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

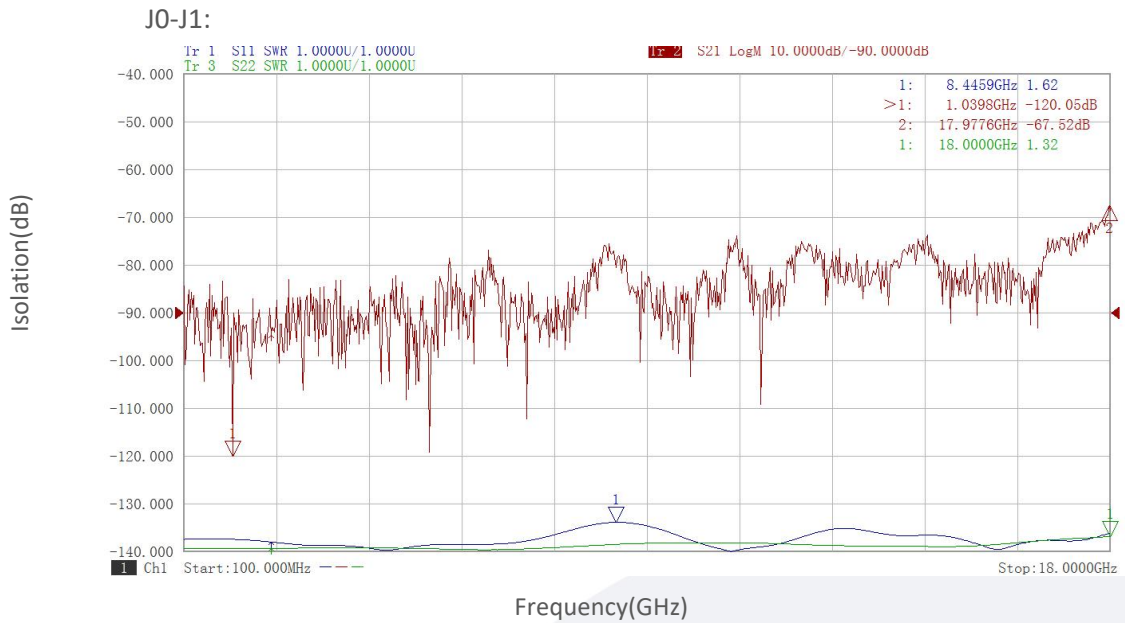


Insertion Loss&VSWR vs Frequency

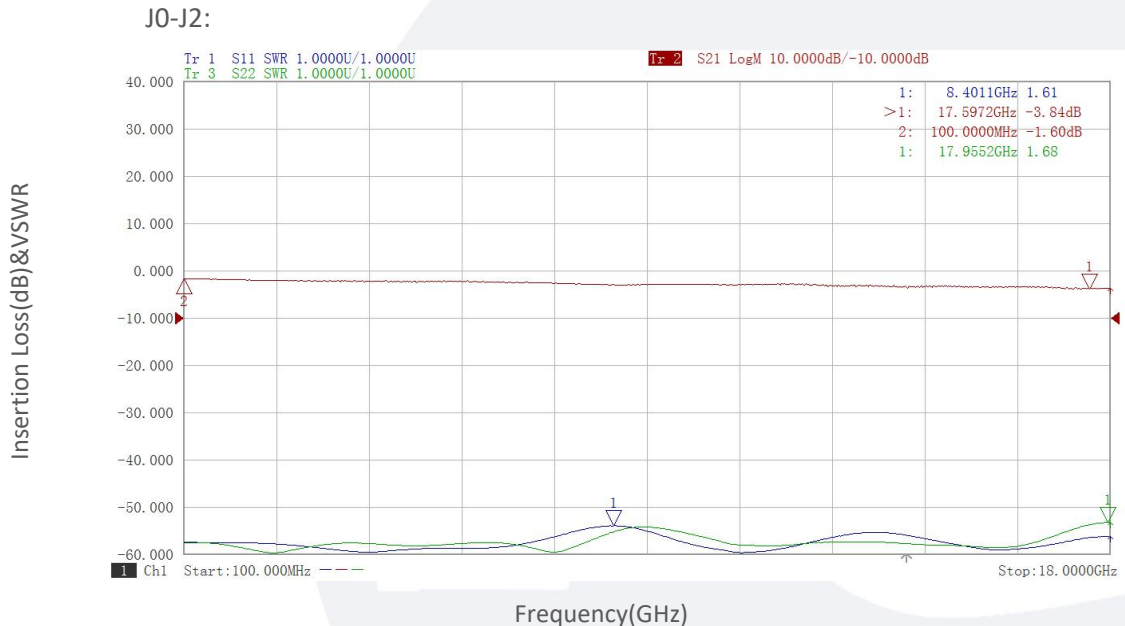


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

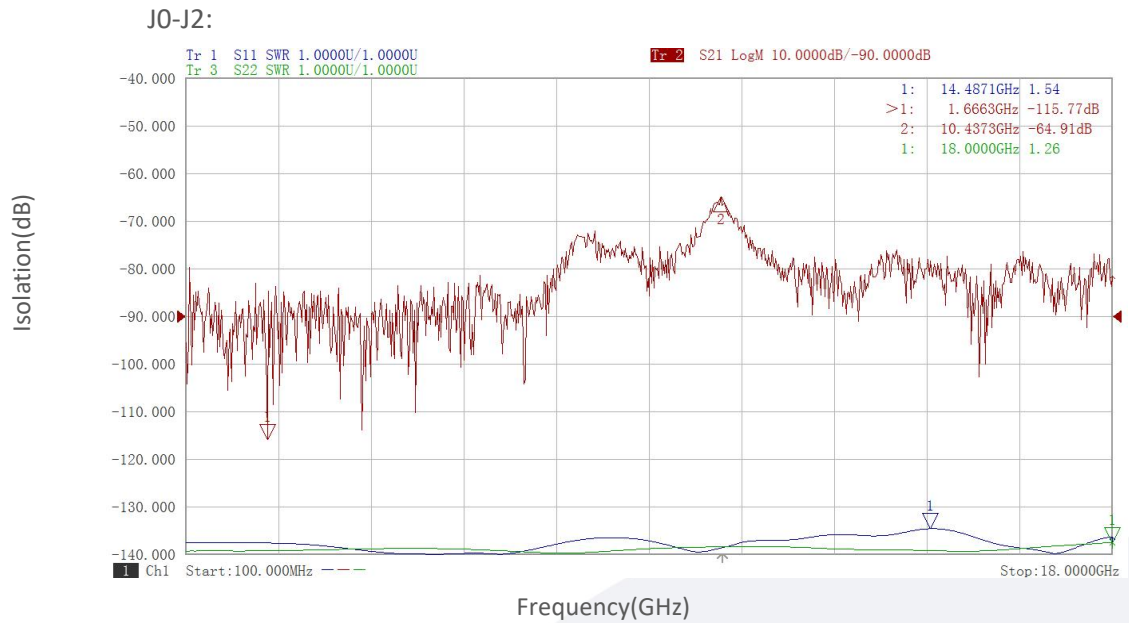


Insertion Loss&VSWR vs Frequency

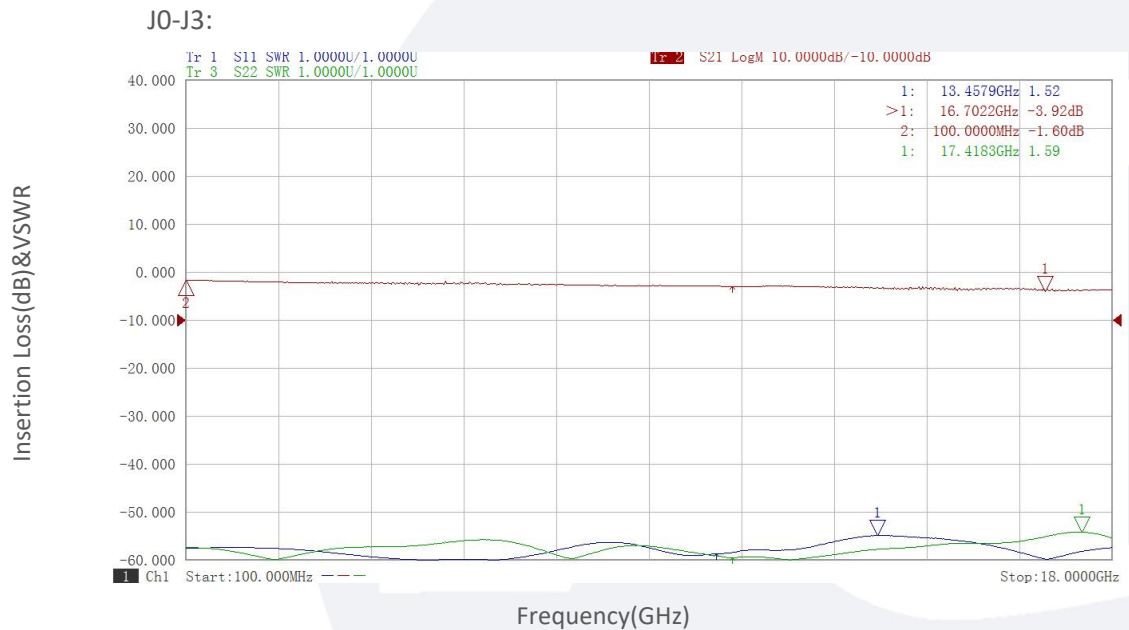


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

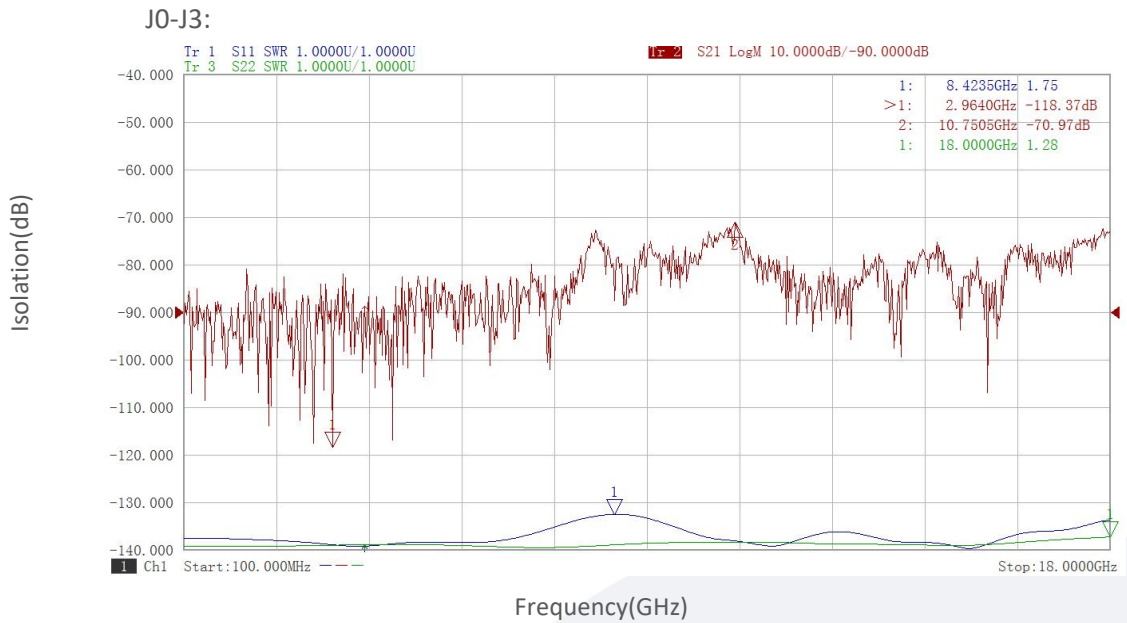


Insertion Loss&VSWR vs Frequency

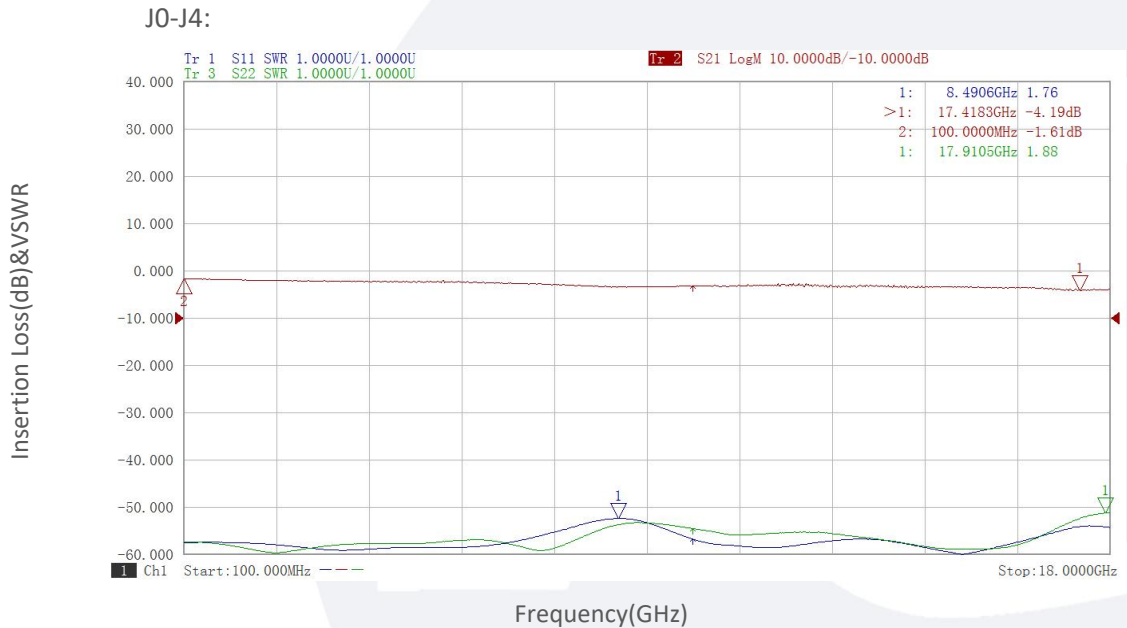


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

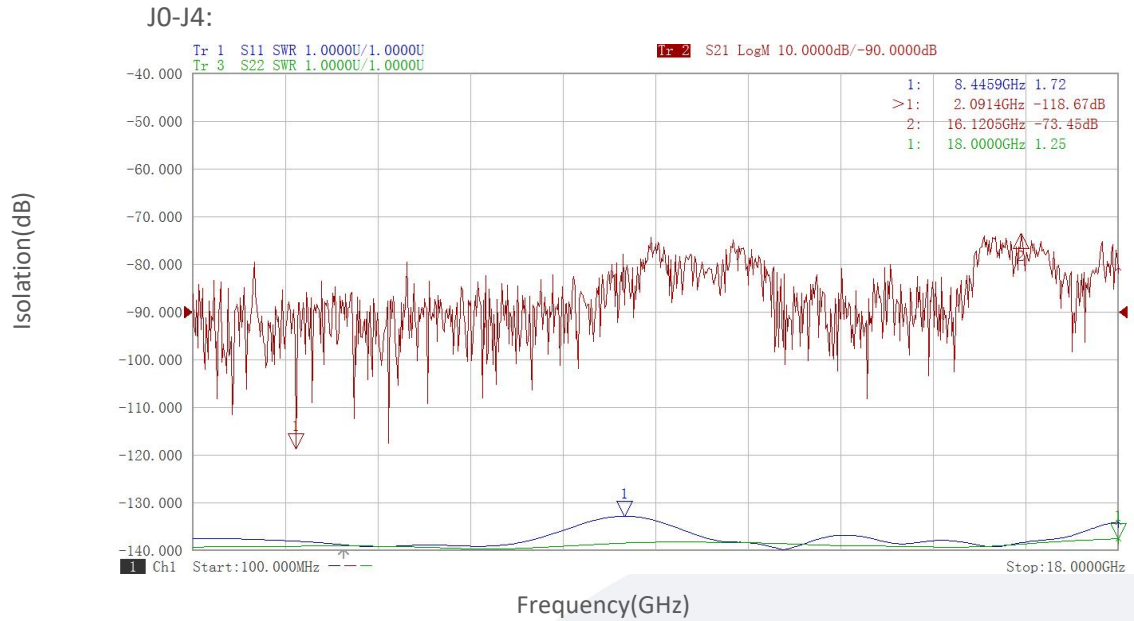


Insertion Loss&VSWR vs Frequency

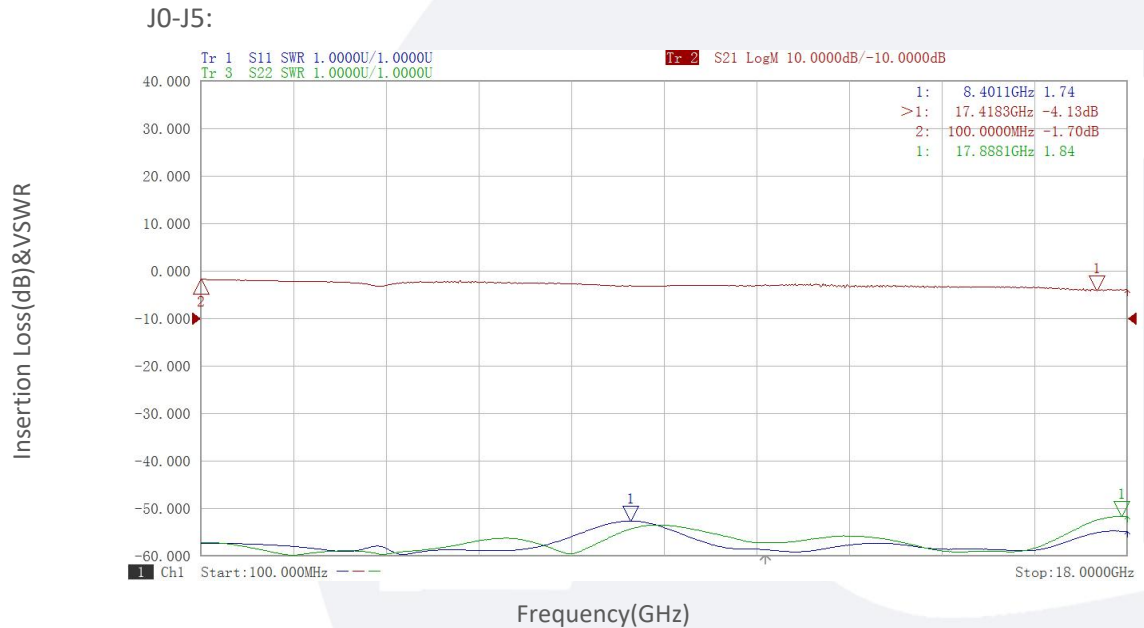


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

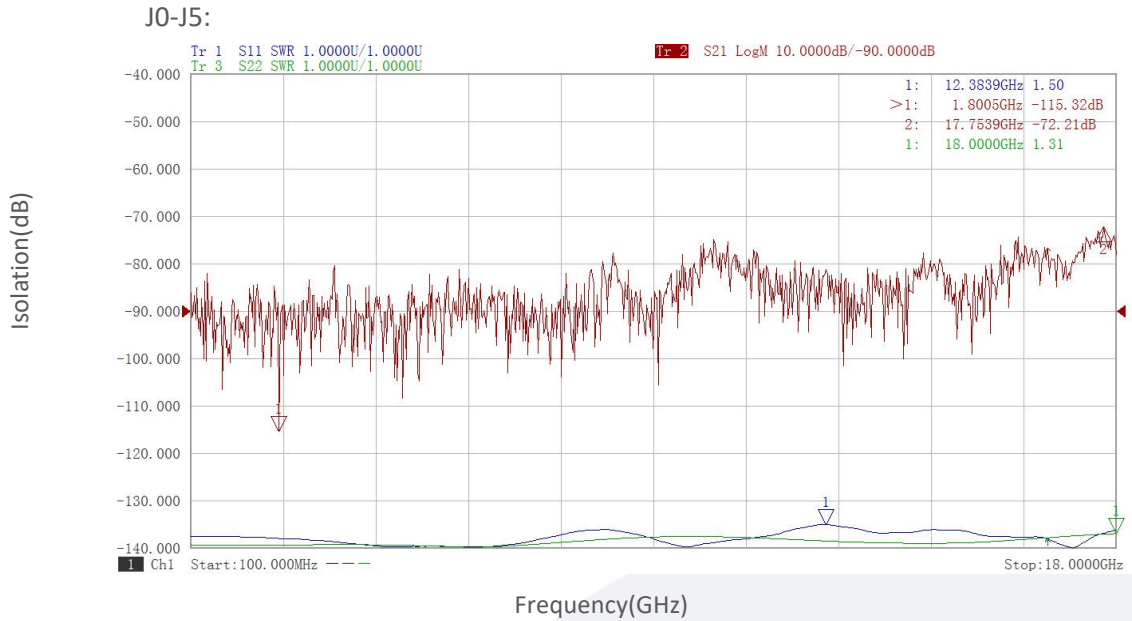


Insertion Loss&VSWR vs Frequency

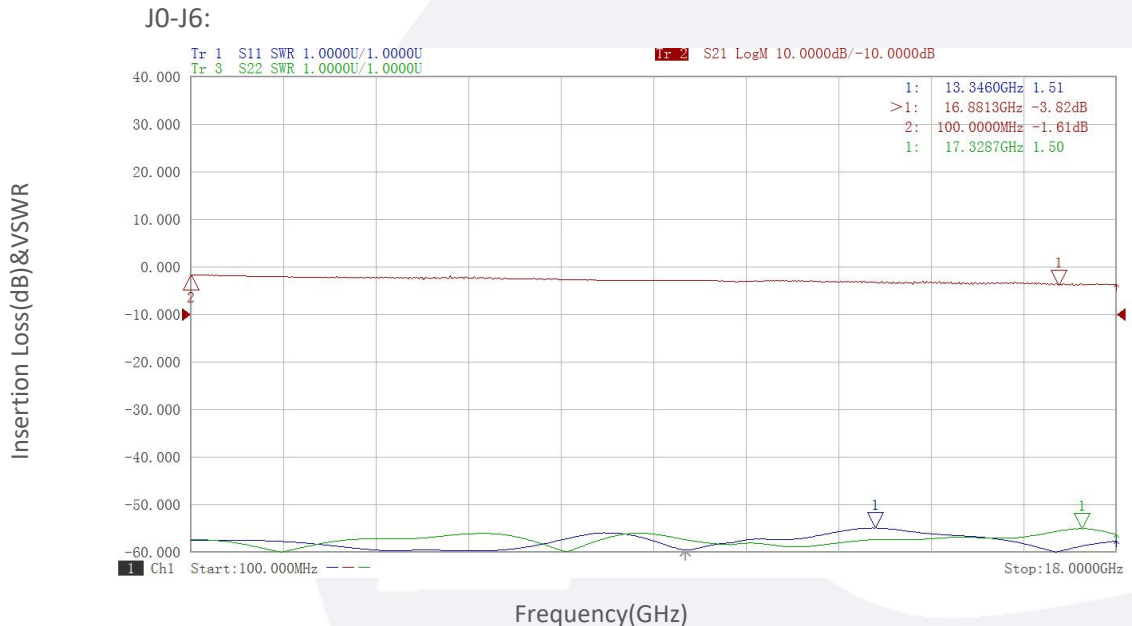


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

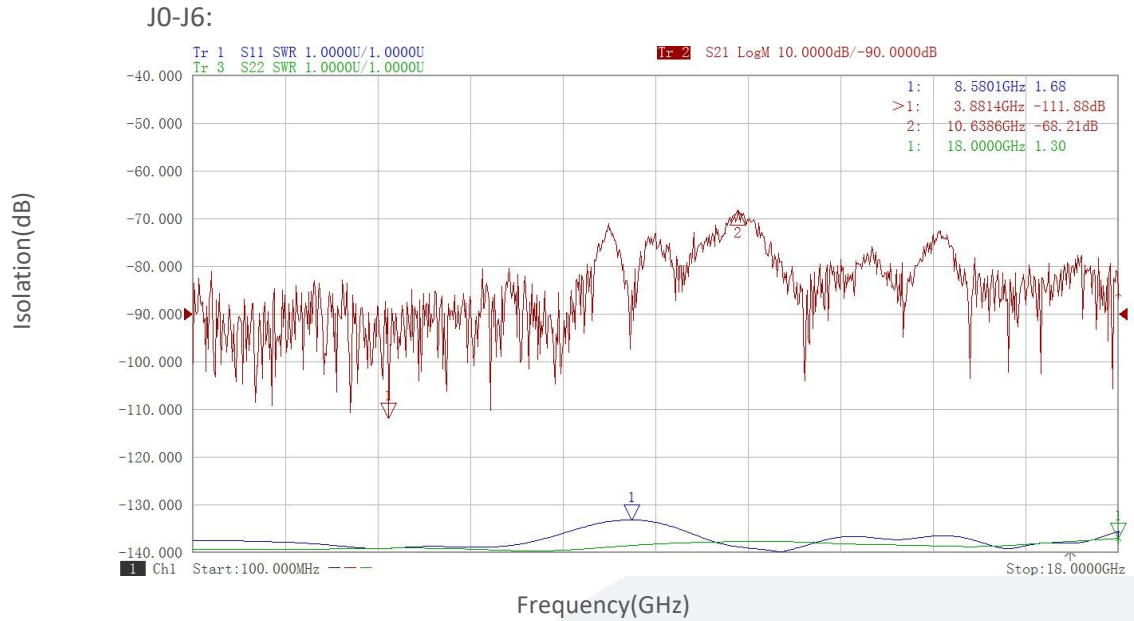


Insertion Loss & VSWR vs Frequency

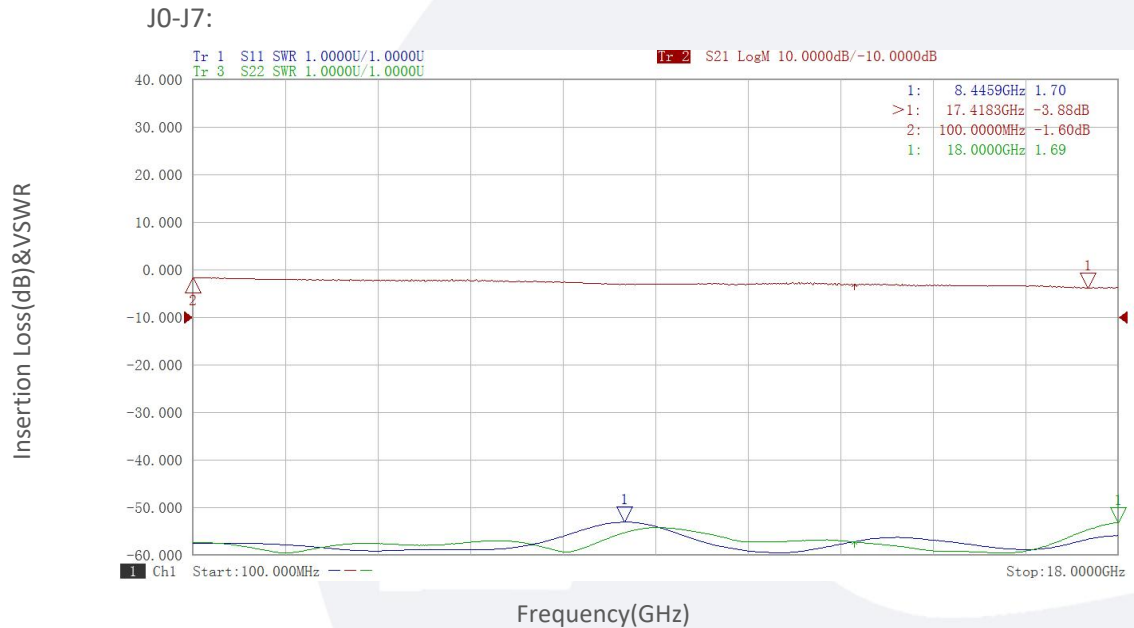


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

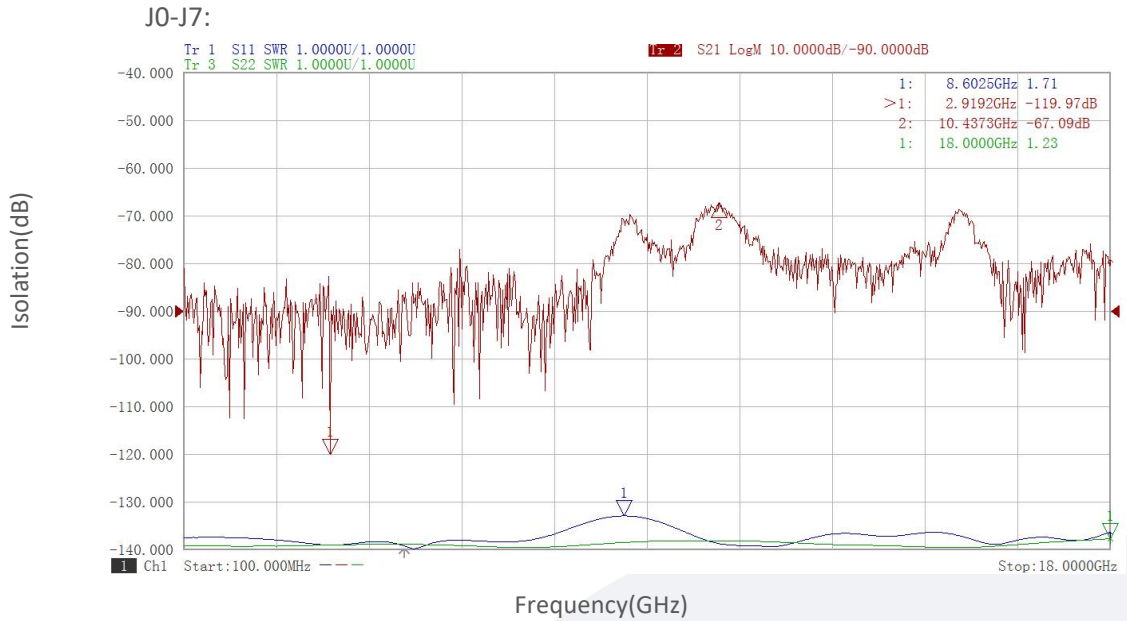


Insertion Loss&VSWR vs Frequency

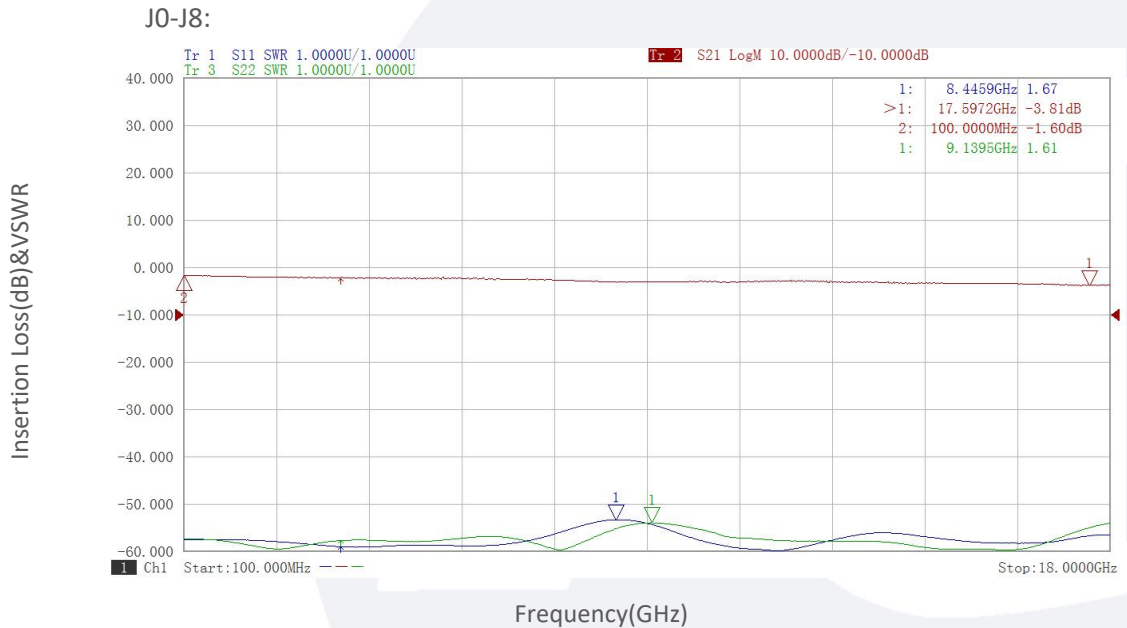

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Isolation vs Frequency

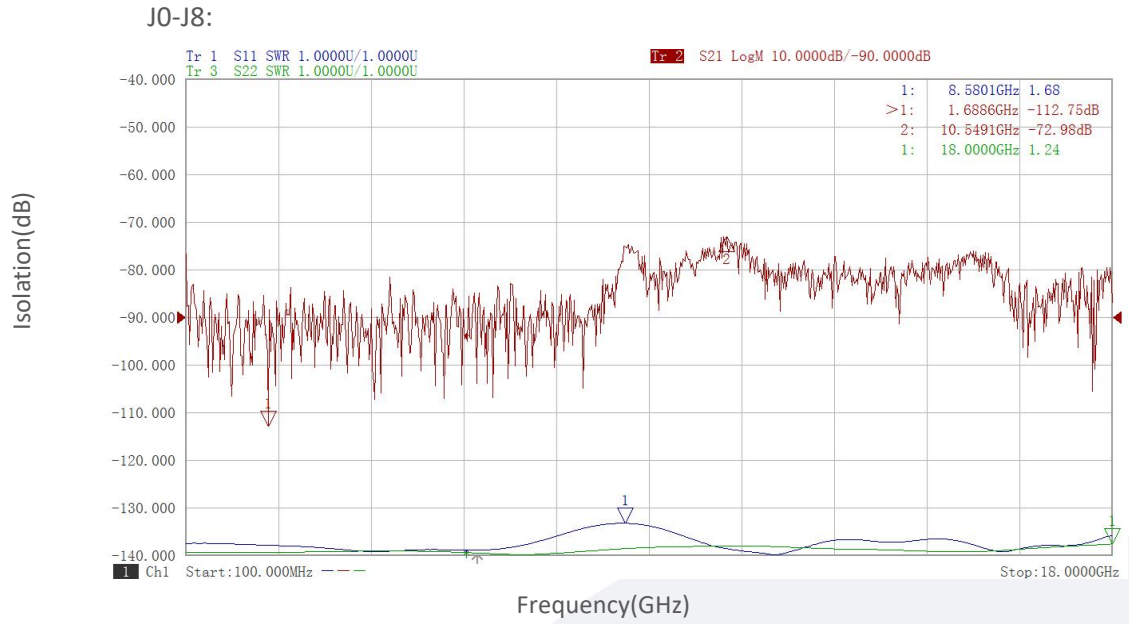

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.