

## Low Noise Amplifier

8-12GHz /1dB NF/32dB Gain/15 dBm P1dB

Model: TLLA8G12G-32-10

TLLA8G12G-32-10 is a low noise amplifier with a small signal gain of 32 dB and a nominal noise figure of 1.0 dB across the frequency range of 8 to 12 GHz. The DC power requirement for the amplifier is +12 V DC/50 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Ultra Wide Band:8-12GHz
- Gain: 32dB Min
- Noise Figure: 1.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	8		12	GHz
增益 Gain	32			dB
增益平坦度 Gain Flatness		±1.5		dB
噪声系数 Noise Figure		1.0		dB
线性输出功率 Output P1dB	12			dBm
输入驻波 Input VSWR		1.7	2.0	:1
输出驻波 Output VSWR		1.7	2.0	:1
直流电压 DC Voltage	+6	+12	+15	V DC
直流电流 DC Supply Current		50		mA
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm
重量 Weight	55	g



## 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA8G12G-32-10	Low Noise Amplifier, 8-12GHz, Noise Figure:1.0dB, Gain:32 dB,P1dB:12dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA8G12G-32-10-HS	Low Noise Amplifier, 8-12GHz, Noise Figure:1.0dB, Gain:32 dB,P1dB:12dBm,+12V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:

### Gain&VSWR vs Frequency




### Noise Figure vs Frequency

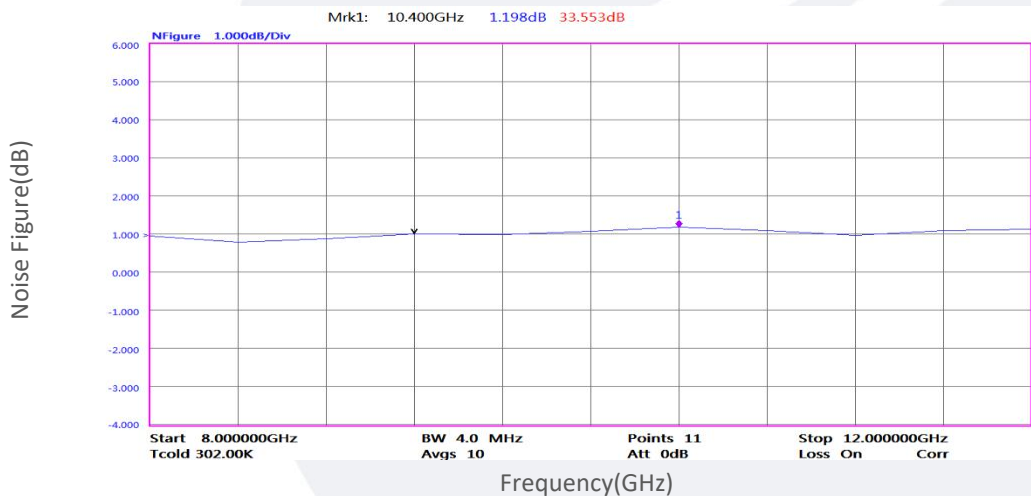


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Gain vs Output Power

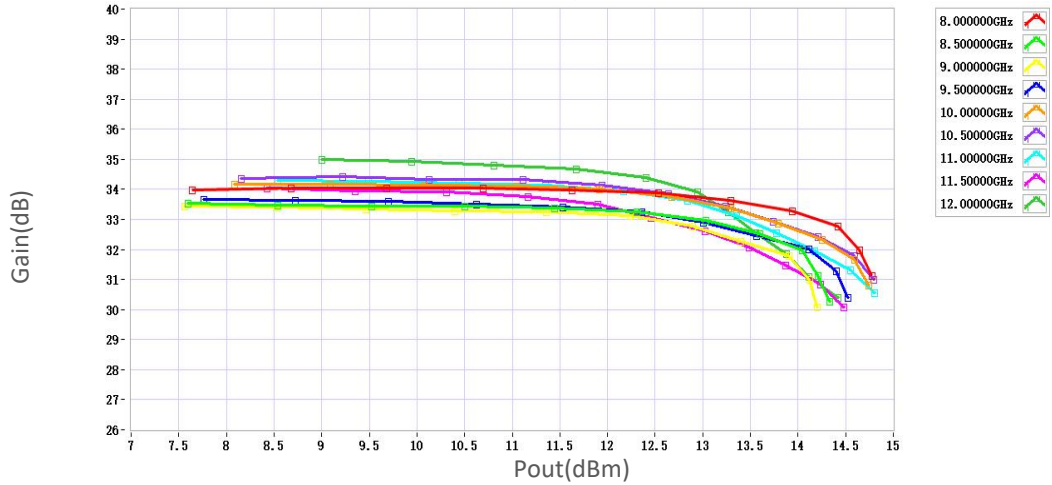

P1dB vs Frequency

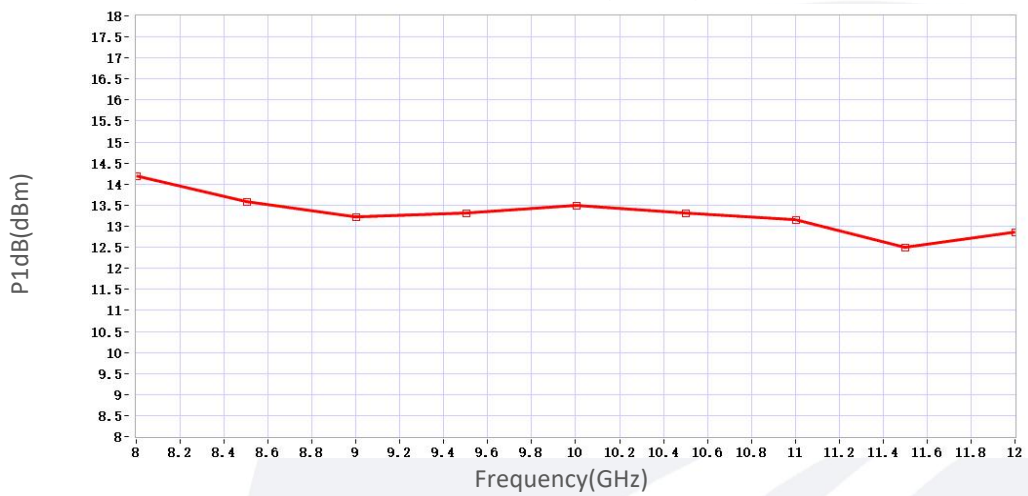

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Psat vs Frequency

Psat(dBm)

Frequency(GHz)

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

