

Part No: TPSD10M40G2SN

10 MHz-40 GHz, Wide Band Coaxial Detector

Electrical:

Frequency:	10 MHz-40 GHz
Low Level Sensitivity:	0.5 mV/uW Typ; 0.35 mV/uW Min
VSWR:	2.0:1 Max
Max Input Power:	100 mW


Negative output polarity standard. Add "P" to end of model number for positive output polarity

Mechanical:

Operation Temperature:	-20~+70°C
Storage Temperature:	-40~+85°C
Body Material:	Stainless Steel 303
Center conductor:	Becu, Golden
RF IN Connectors:	2.4mm Male
DC OUT:	SMA Female
Relative Humidity:	0 ~ 90%

Outline Drawing:

Unit: mm

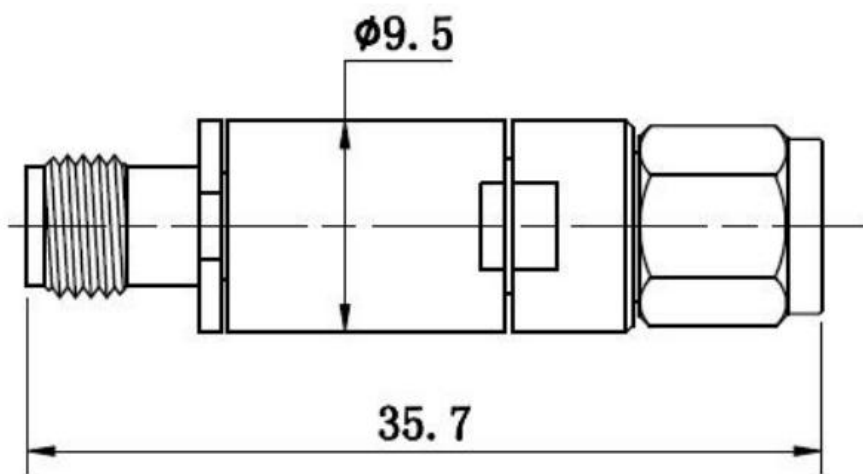

Typical Performance Data:

