

Low Noise Amplifier

18-50GHz /4.5dB NF/35dB Gain/14dBm P1dB**Model: TLLA18G50G-35-45**

TLLA18G50G-35-45 is a low noise amplifier with a small signal gain of 35 dB and a nominal noise figure of 4.5 dB across the frequency range of 18 to 50 GHz. The DC power requirement for the amplifier is +12 V DC/300 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Ultra Wide Band:18-50GHz
- Gain: 35dB Min
- Noise Figure: 4.5dB Max
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	18		50	GHz
Gain	35			dB
Gain Flatness		±3.0		dB
Noise Figure		4	4.5	dB
Output P1dB	10	14		dBm
Output Psat	12	15		dBm
Input VSWR		1.8	2.2	:1
Output VSWR		2		:1
DC Voltage	10	12	15	V DC
DC Supply Current		300		mA
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.4mm Female/2.4mm Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm
Weight	50	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

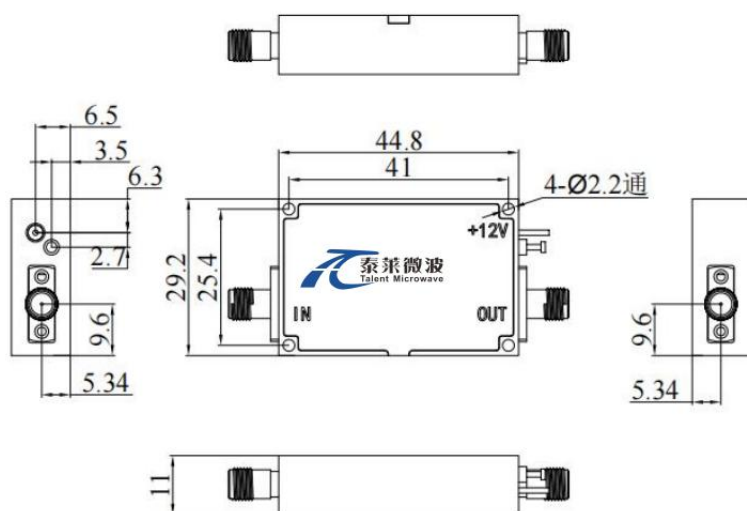

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES



Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLLA18G50G-35-45	Low Noise Amplifier, 18-50GHz, Noise Figure:4.5dB, Gain:35 dB,P1dB:14dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA18G50G-35-45-HS	Low Noise Amplifier, 18-50GHz, Noise Figure:4.5dB, Gain:35 dB,P1dB:14dBm,+12V DC,With Heatsink	


Typical Performance Data:

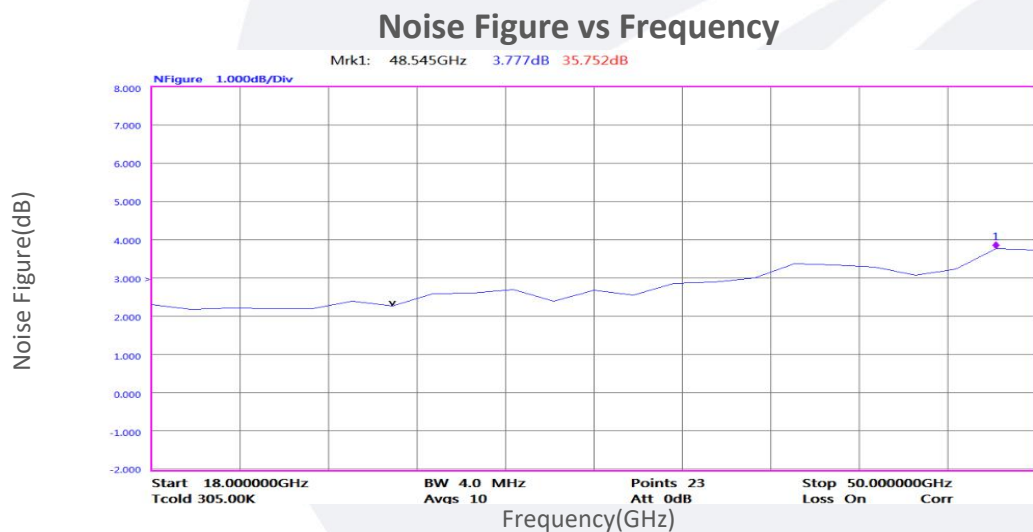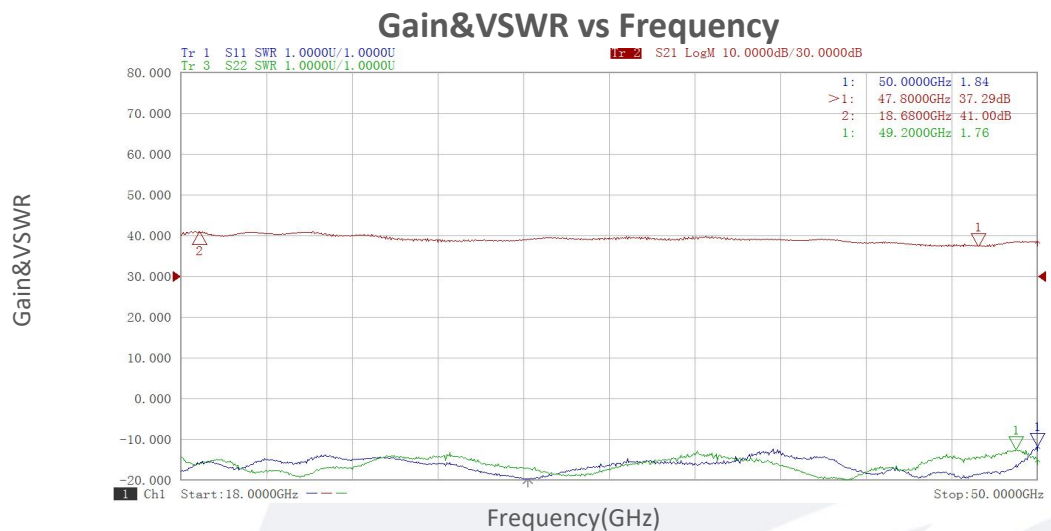


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Gain vs Output Power

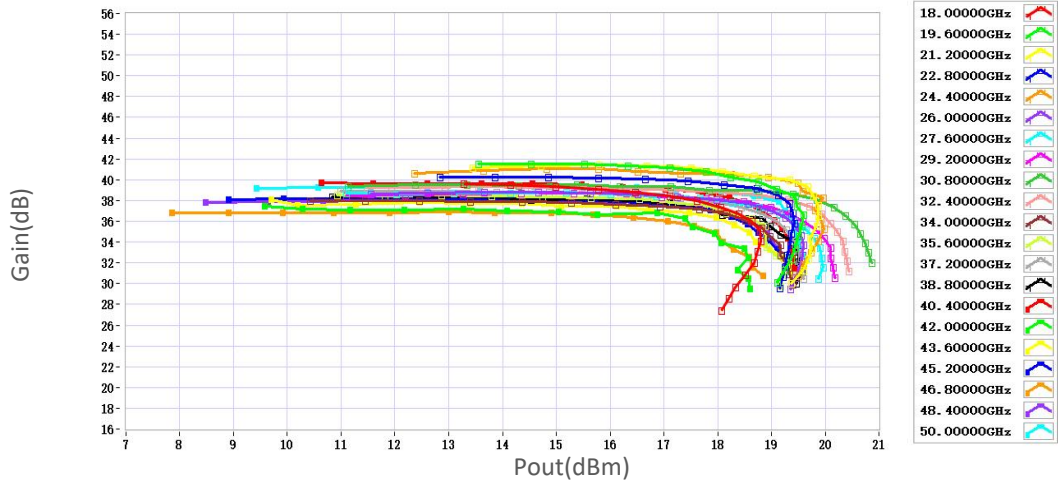

P1dB vs Frequency

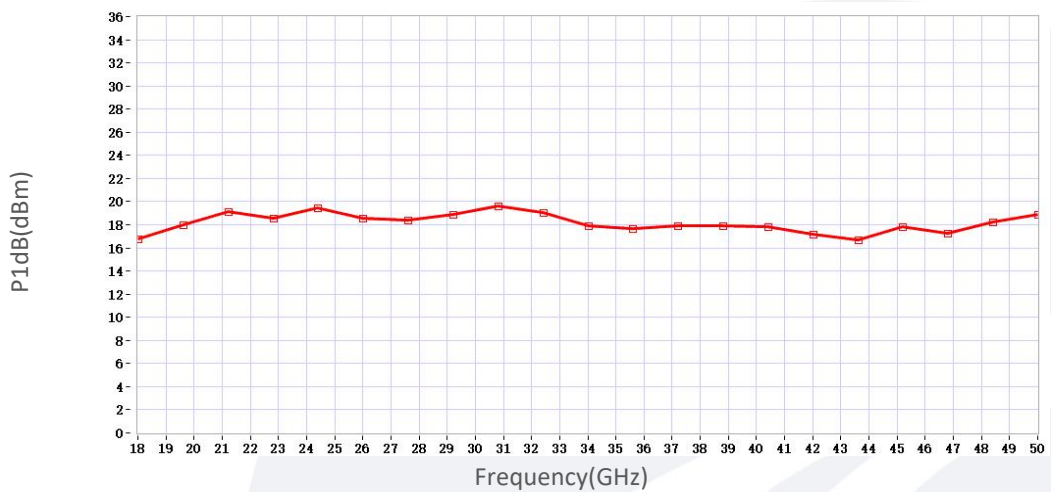


P3dB vs Frequency

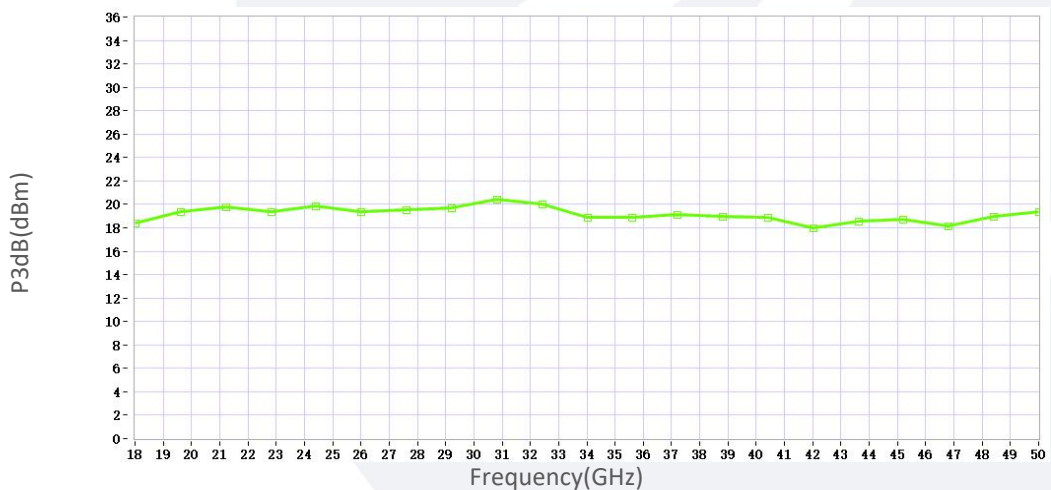

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Psat vs Frequency

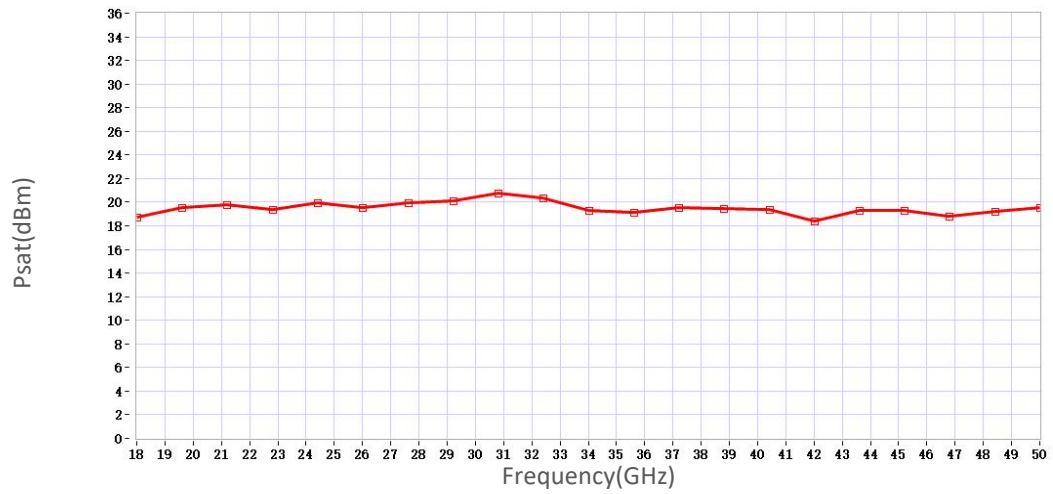

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.