

Power Amplifier

24-47GHz /25dB Gain/26 dBm Psat

Model: TLPA24G47G-25-26

TLPA24G47G-25-26 is a power amplifier with small signal gain of 25dB and a nominal Psat of 26 dBm across the frequency range of 24 to 47 GHz. The DC power requirement for the amplifier is +12 VDC/0.6A. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Ultra Wide Band: 24-47GHz
- Gain: 25dB Min
- Output Power Psat: 26dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	24-47			GHz
Small Signal Gain	25	30		dB
Gain Flatness		±2		dB
Output P1dB	25	26		dBm
Output Psat		26		dBm
Input VSWR		2	2.5	:1
DC Voltage		12		V DC
DC Supply Current		0.6	1	A
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.4mm Female/2.4mm Female	
DC Bias	Solder Pin	
Size	43*35*12	mm
Weight	/	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+12 V
RF Input Power	+5 dBm
ESD sensitivity (HBM)	Class 0, passed 150V

Outline Drawing:

Unit:mm

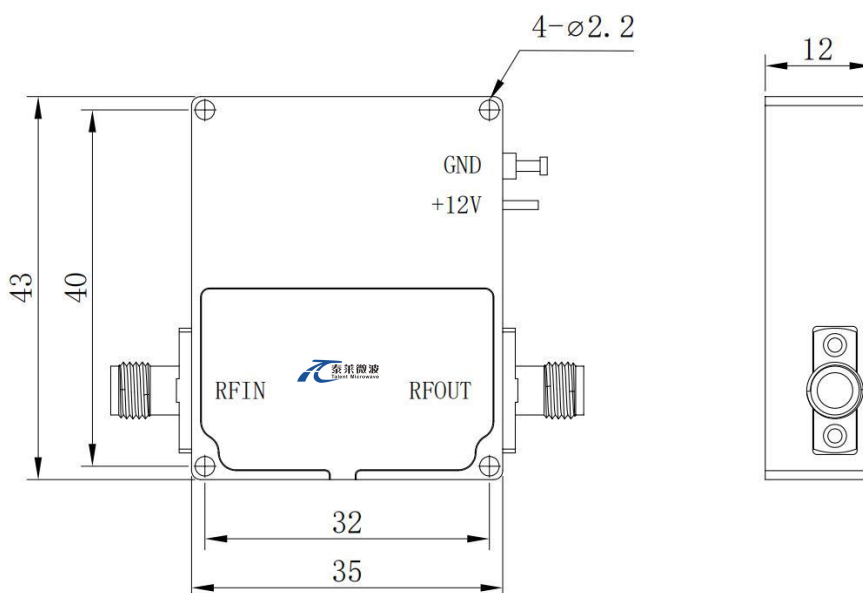

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA24G47G-25-26	Power amplifier 24-47GHz,Gain:25dB,Psat:26dBm,+12V DC,Without Heatsink.	Rev.1.1
TLPA24G47G-25-26-HS	Power amplifier 24-47GHz,Gain:25dB,Psat:26dBm,+12V DC,With Heatsink.	Rev.1.1