

Solid State High Power Amplifier Systems

16-16.5GHz/64dB Gain/64dBm Psat/220V AC

Model: TLPA16G16.5G-64-64-P-BC

TLPA16G16.5G-64-64-P-BC is a solid state high power amplifier systems provides high output power and high gain across the 16 to 16.5 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 16-16.5GHz
- Gain: 64dB Min
- Psat Output Power:64dBm Min
- Protection:Over TEM,over voltage, over current ,output mismatch protection
- 50 Ohm Matched Input / Output



Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	16-16.5			GHz
Working Mode	MOD	PULSE ONLY			
Power Gain	GP	64			dB
Output Psat	Psat	64	65		dBm
Spurious@Pout=64dBm	Spur			-60	dBc
Harmonics@Pout=64dBm	HAM			-30	dBc
Input Signal Mode	IPS_MOD	CW/PULSE			
Modulation Signal Level	TTL	0		5	V
Modulation Frequency	MF	1		10	KHz
Pulse Width	T	1		500	us
Duty Cycle	τ			10	%
Output Rise/Fall Time	Tr		50	100	ns
Pulse Drop	Pdp		0.5		dB
Inrush Impulse Current@10%	IPC			20	A
Power consumption@5%	Pdiss			800	W
Power consumption@10%	Pdiss			1200	W
AC Voltage	Vac		220		V AC
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	N Female/WRD62	
Forward/Reverse Coupling	SMA Female/SMA Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Modulation Interface	BNC Female	
Size	19 Inch 5U*550 depth	mm
Weight	≤45	Kg

Absolute Maximum Ratings:


Parameter	Value
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Key Features:

Parameter	Advantages
Control functions	1, Power setting On/Off 2, Gain control
Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Output mismatch
Remote control	RS422/LAN
Monitor functions	1, Output power 2, Reflected power 3, TEM 4, Operating voltage 5, Operating current
Cooling system	Built in Cooling system, forced air cooling

Outline Drawing:

Unit:mm

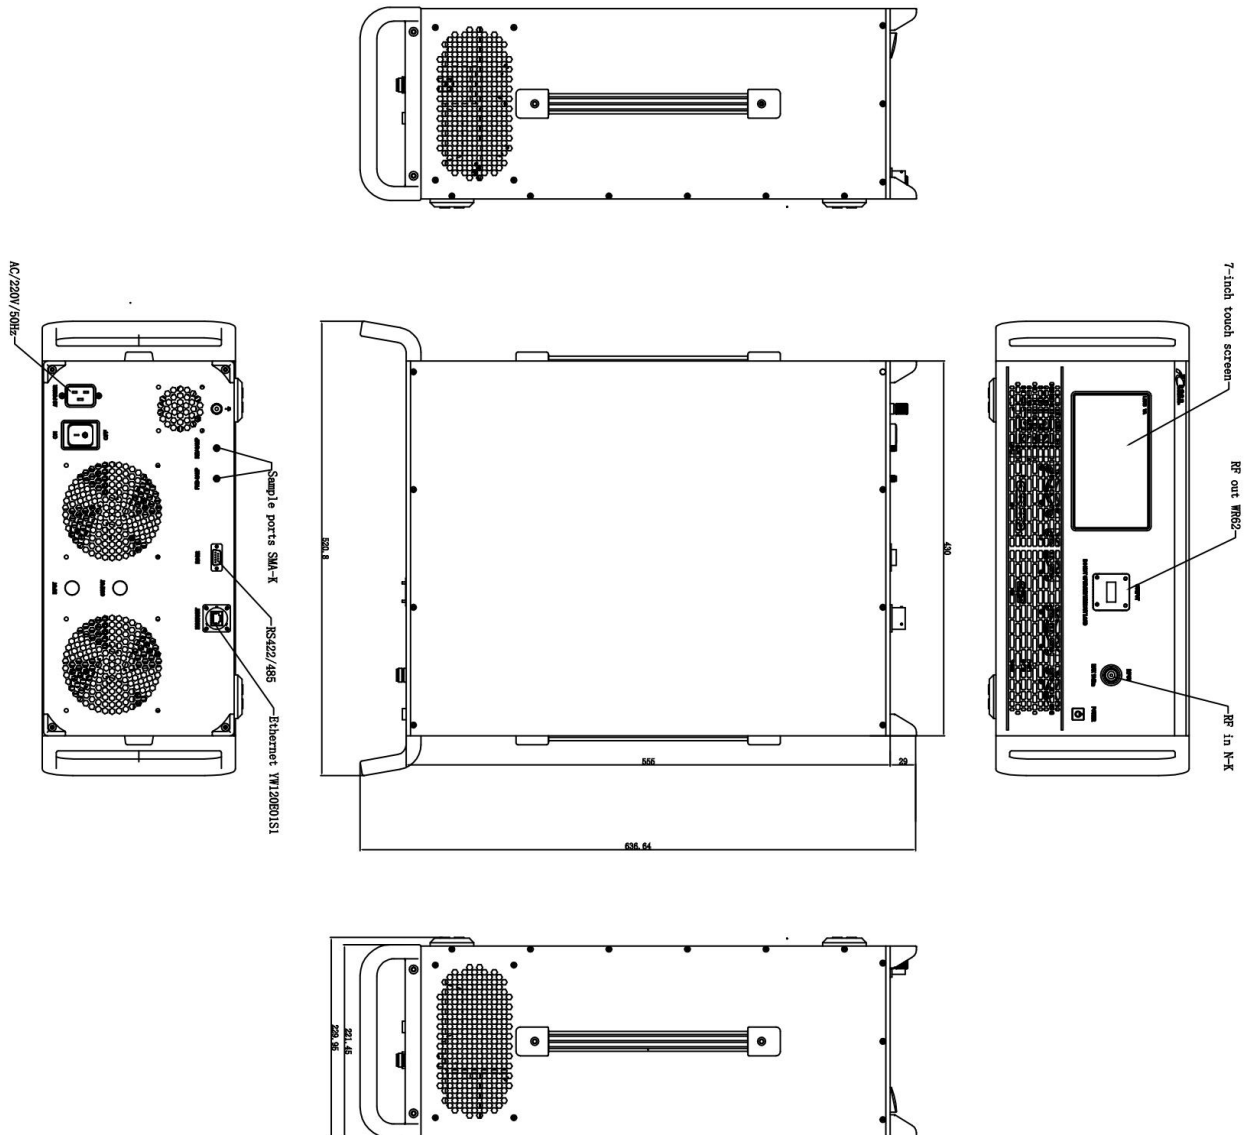

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA16G16.5G-64-64-P-BC	Solid State High Power Amplifier Systems 16-16.5GHz,Gain:64dB,Psat:64dBm,220V AC,Built in Fan Cooling	Rev.1.1