

Voltage Controlled Attenuator

0.2-3 GHz/30dB Attenuation Range

Model: TLVA0.2G3G-30-5

The TLVA0.2G3G-30-5 is an broadband voltage controlled electrical attenuator operating from 0.2 to 3 GHz. The attenuator exhibits 3 dB typical insertion loss and 0 to 30 dB nominal attenuation range across the frequency range of 0.2 to 3 GHz while applying 0 to +5 V DC control voltage. The RF input and output ports are female SMA coax connectors.

Features:

- Ultra Wide Band: 0.2-3GHz
- Attenuation Range: 30 dB Typ
- Insertion Loss: 3 dB Typ
- High Attenuator Accuracy

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.2-3			GHz
插损 Insertion Loss		3	4.5	dB
衰减范围 Attenuation Range		30		dB
输入驻波 Input VSWR		1.4		:1
输出驻波 Output VSWR		1.4		:1
直流电压 DC Voltage		12		V DC
直流电流 DC Supply Current	0		5	mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
控制连接器 Control Connector	Pin	
尺寸 Size	40*38*9	mm

绝对最大值 Absolute Maximum Ratings :

描述 Description	参数 Parameter	单位 Units
供电偏置电压 Supply Bias Voltage	+15 V	
射频输入功率 RF Input Power	30 dBm	
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

外形图 Outline Drawing:

Unit:mm

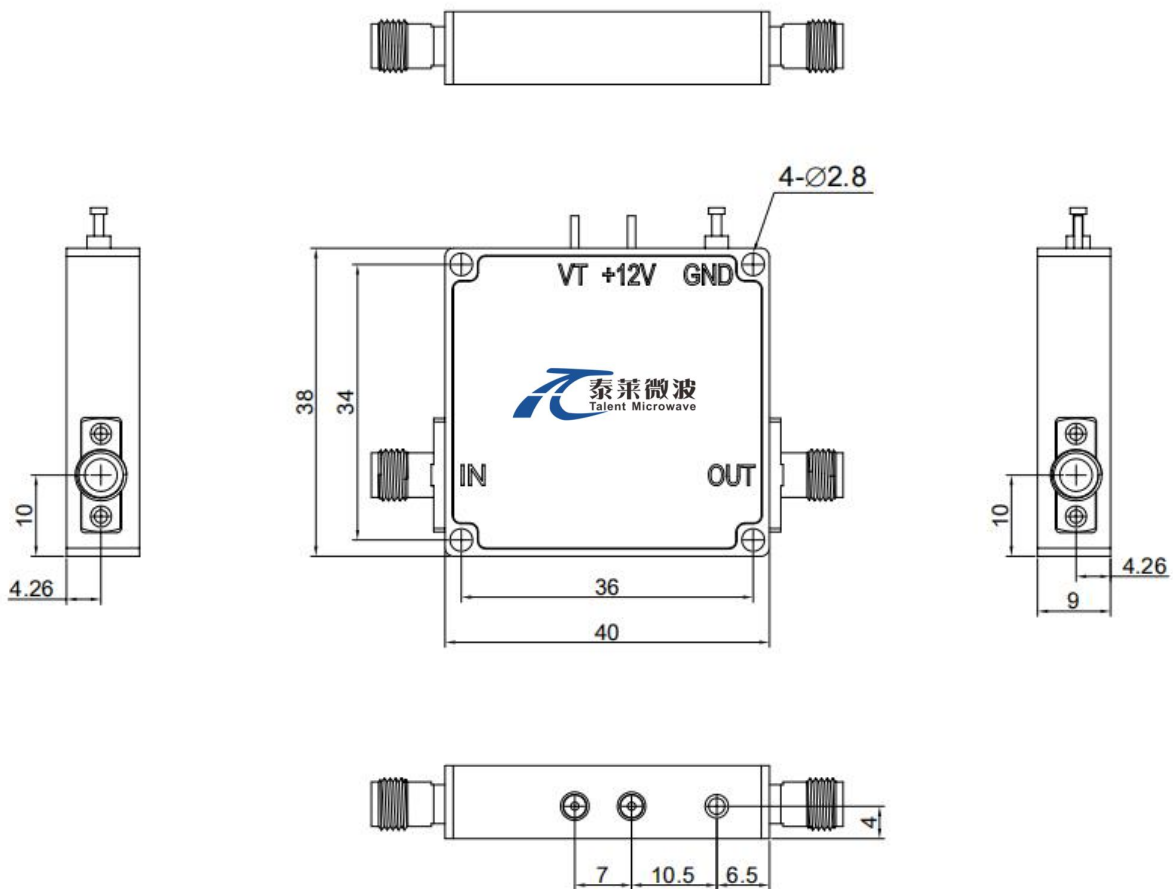

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+55	°C
存储温度 Non-operating Temperature	-25		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLVA0.2G3G-30-5	Voltage Controlled Attenuator 0.2-3 GHz, 30 dB Range,SMA Female	Rev.1.1

典型曲线 Typical Performance Data:

VSWR&Insertion Loss vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


0.5V:

VSWR&Attenuation vs Frequency

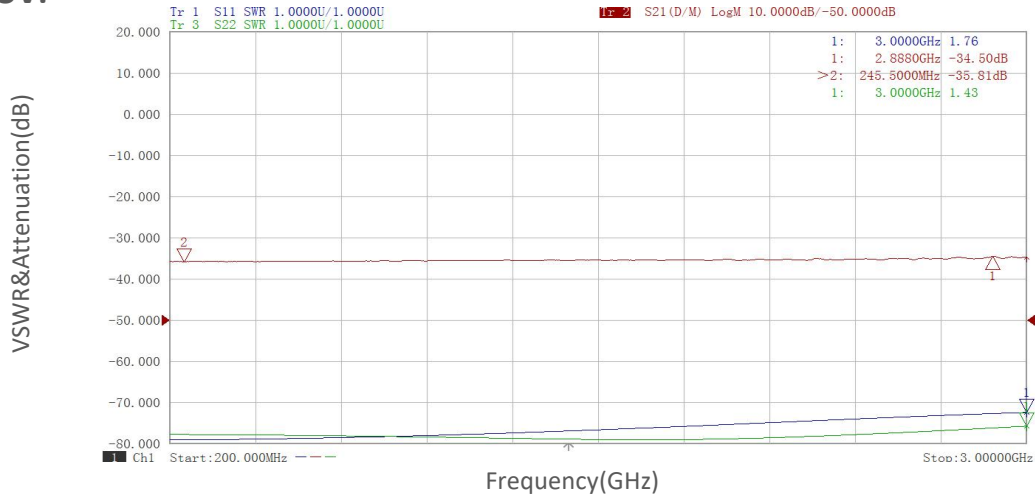


1V:

VSWR&Attenuation vs Frequency

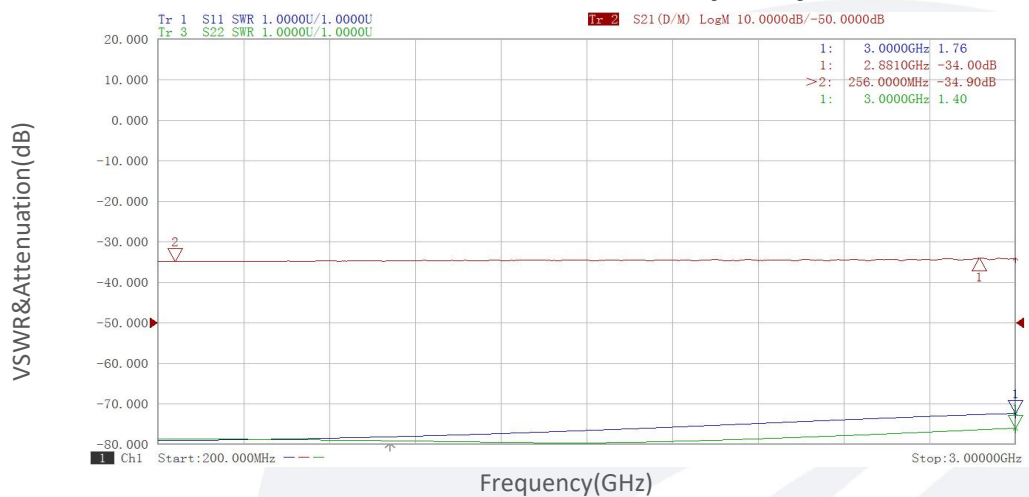

1.5V:

VSWR&Attenuation vs Frequency

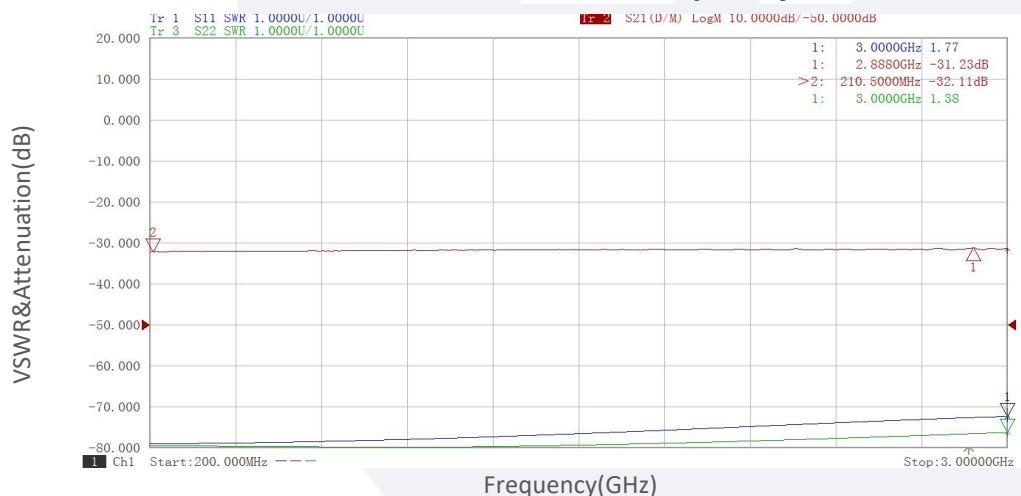


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


2V:

VSWR&Attenuation vs Frequency

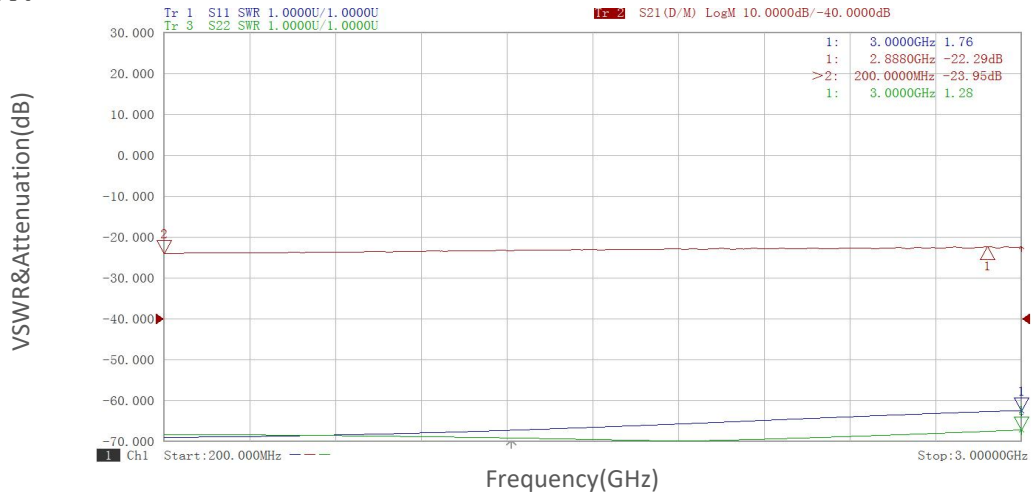


2.5V:

VSWR&Attenuation vs Frequency

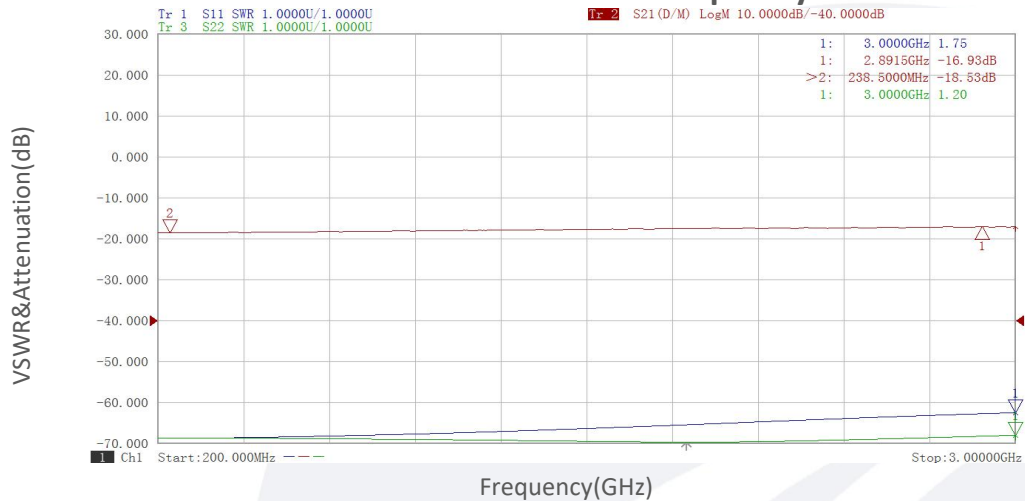

3V:

VSWR&Attenuation vs Frequency

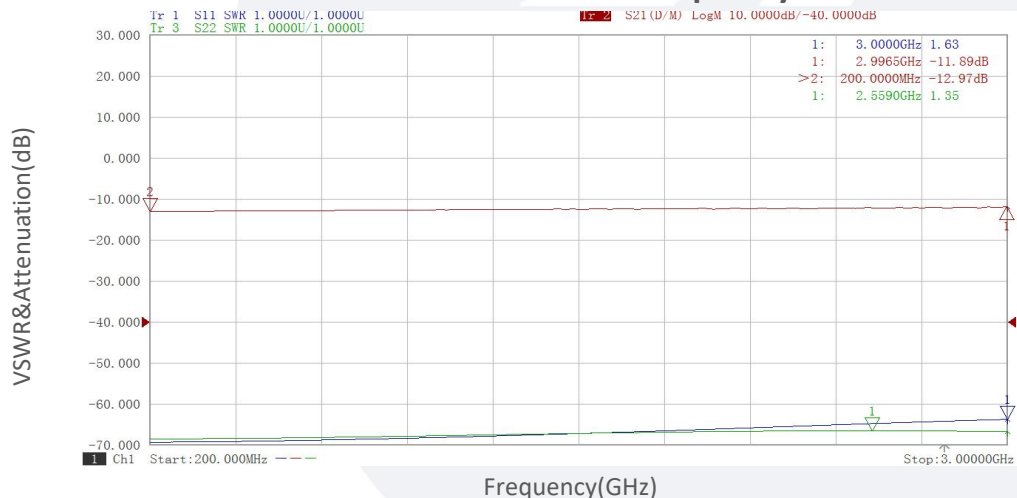


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

3.5V:

VSWR&Attenuation vs Frequency

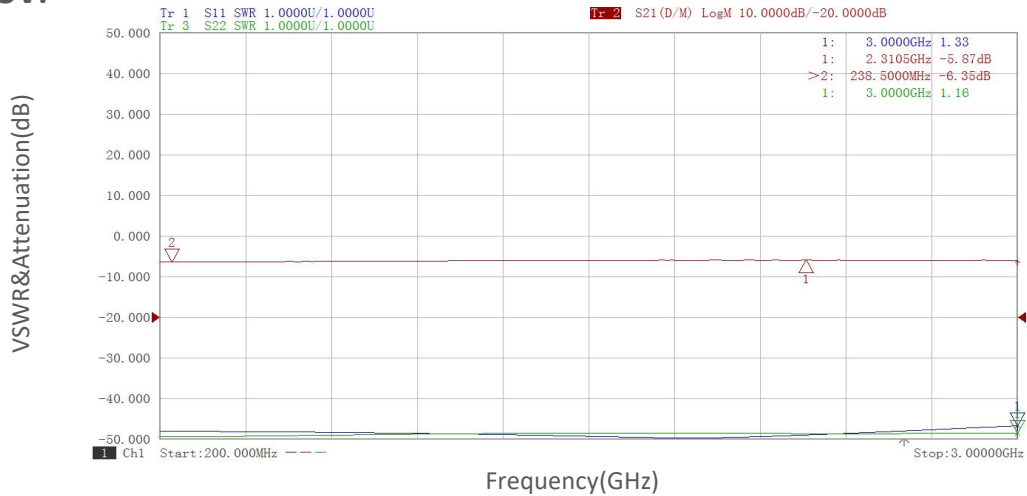


4V:

VSWR&Attenuation vs Frequency



4.5V:

VSWR&Attenuation vs Frequency

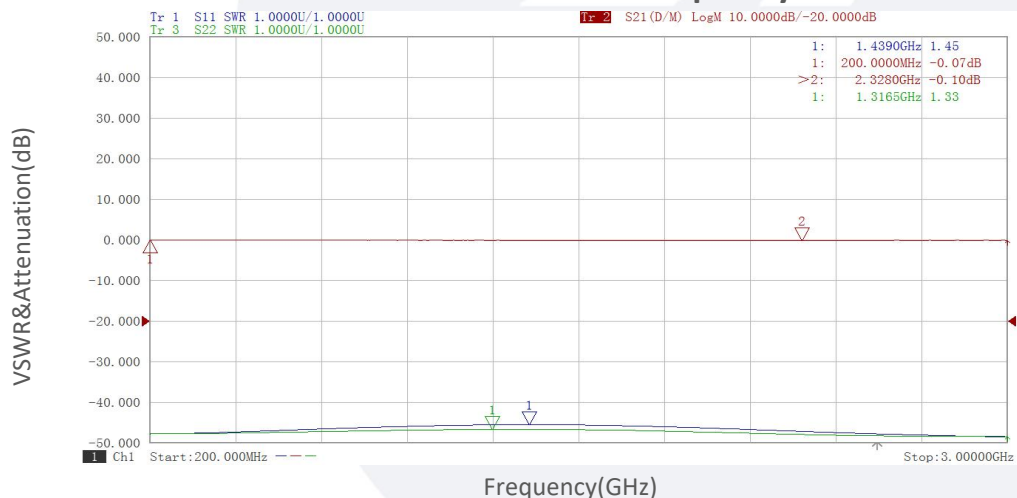


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

5V:

VSWR&Attenuation vs Frequency

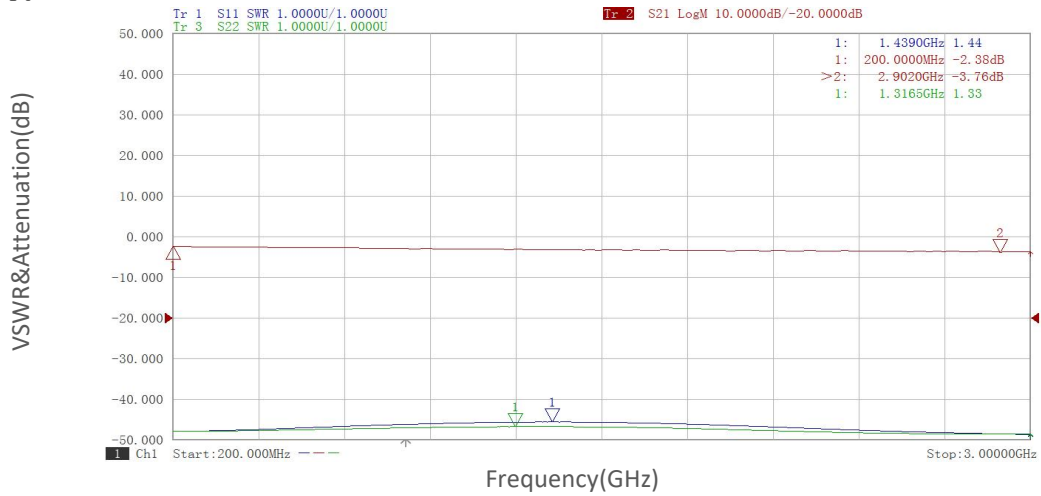

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.