

Voltage Controlled Attenuator

0.2-3 GHz/30dB Attenuation Range

Model: TLVA0.2G3G-30-5

The TLVA0.2G3G-30-5 is an broadband voltage controlled electrical attenuator operating from 0.2 to 3 GHz. The attenuator exhibits 3 dB typical insertion loss and 0 to 30 dB nominal attenuation range across the frequency range of 0.2 to 3 GHz while applying 0 to +5 V DC control voltage. The RF input and output ports are female SMA coax connectors.

Features:

- Ultra Wide Band: 0.2-3GHz
- Attenuation Range: 30 dB Typ
- Insertion Loss: 3 dB Typ
- High Attenuator Accuracy

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	0.2-3			GHz
Insertion Loss		3	4.5	dB
Attenuation Range		30		dB
Input VSWR		1.4		:1
Output VSWR		1.4		:1
DC Voltage		12		V DC
DC Supply Current	0		5	mA
Impedance	50			Ohms

Mechanical Specifications:


Description	Parameter	Units
Input /Output Connector	SMA Female/SMA Female	
Control Connector	Pin	
Size	40*38*9	mm

Absolute Maximum Ratings :

Description	Parameter	Units
Supply Bias Voltage	+15 V	
RF Input Power	30 dBm	
ESD sensitivity (HBm)	Class 0, passed 150V	

Outline Drawing:

Unit:mm

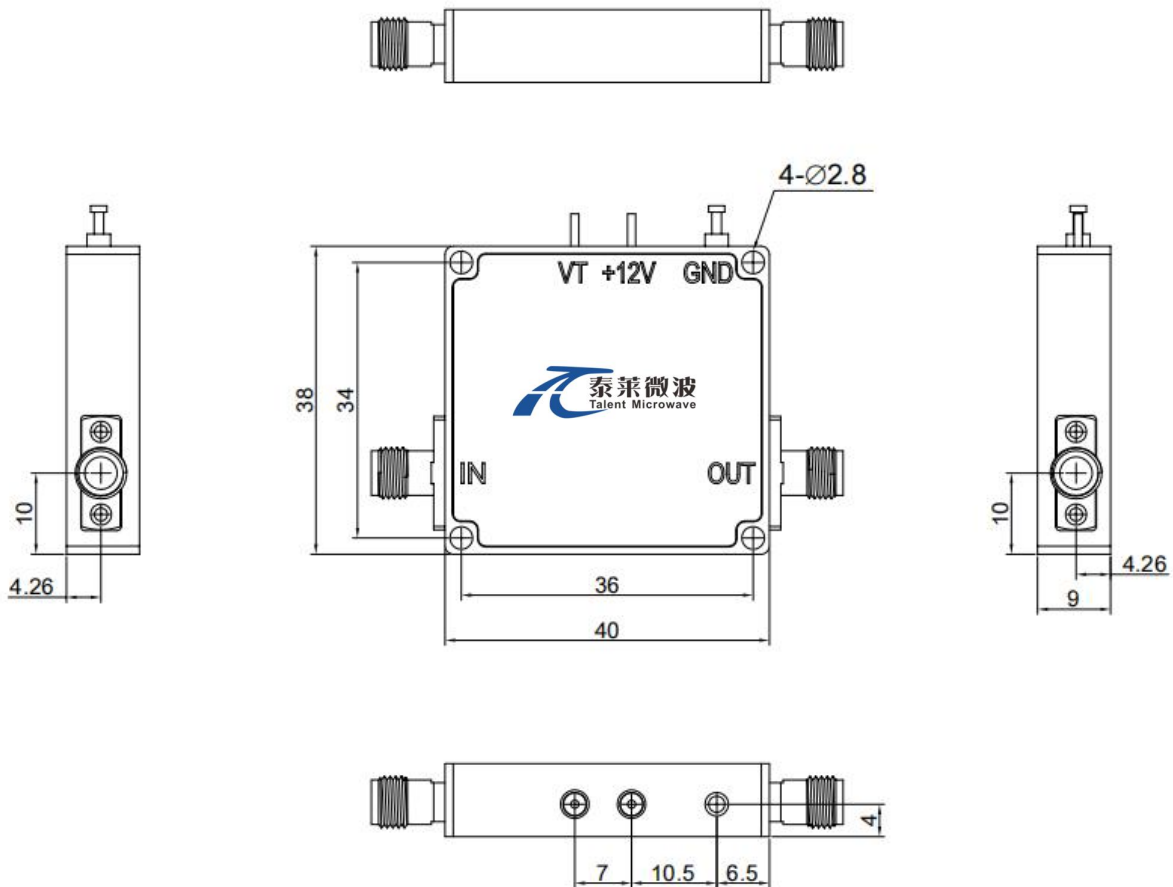

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	0		+55	°C
Non-operating Temperature	-25		+65	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLVA0.2G3G-30-5	Voltage Controlled Attenuator 0.2-3 GHz, 30 dB Range,SMA Female	Rev.1.1

Typical Performance Data:

VSWR&Insertion Loss vs Frequency

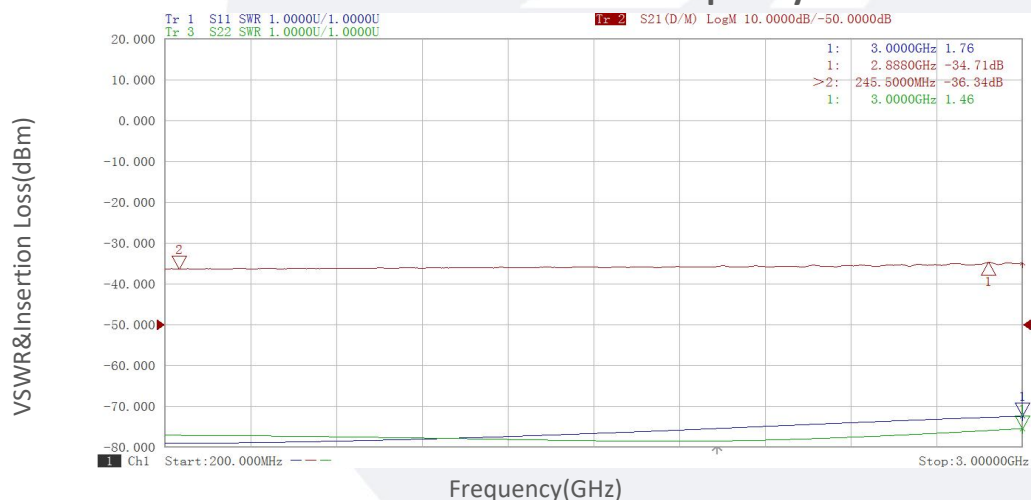


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


0.5V:

VSWR&Attenuation vs Frequency

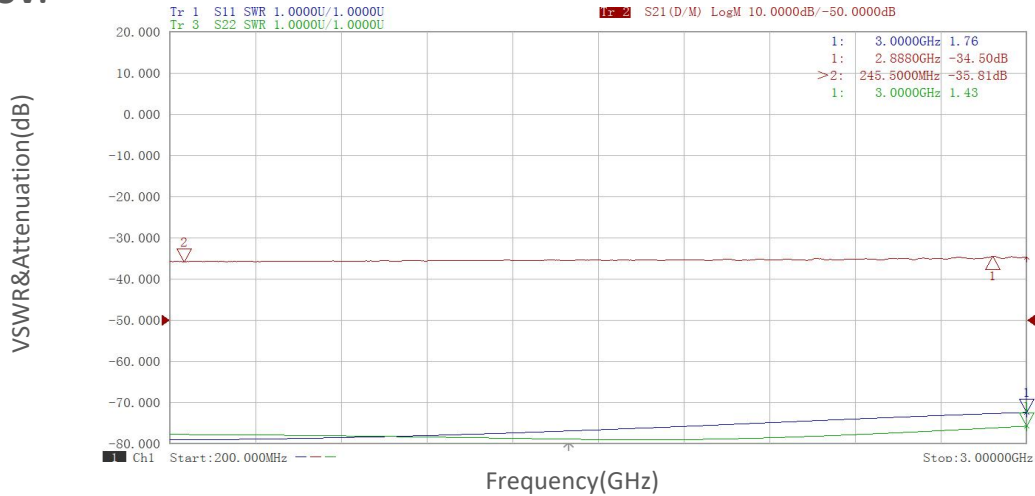


1V:

VSWR&Attenuation vs Frequency

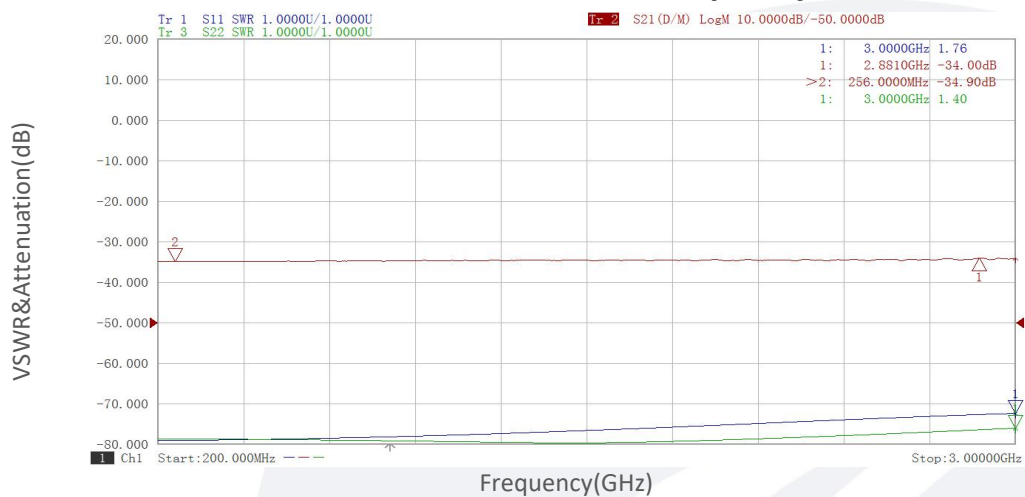

1.5V:

VSWR&Attenuation vs Frequency

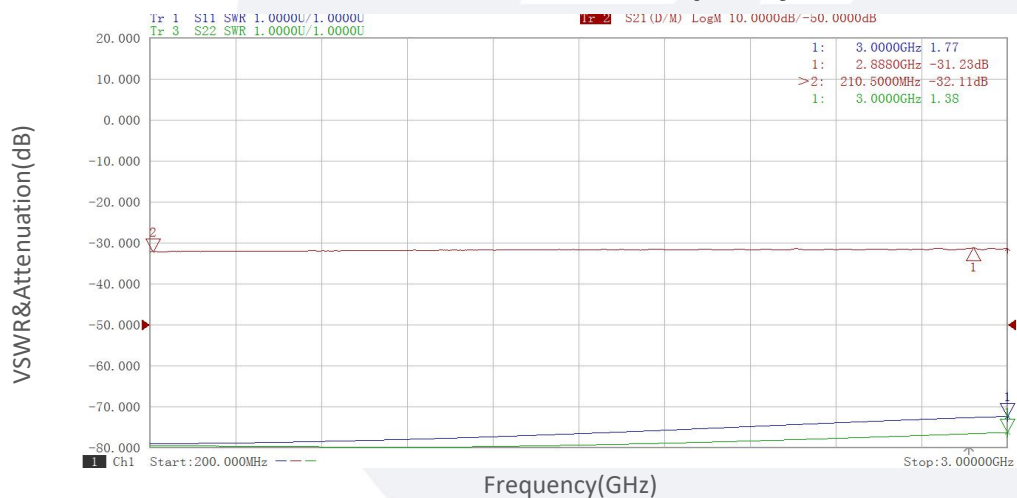


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


2V:

VSWR&Attenuation vs Frequency

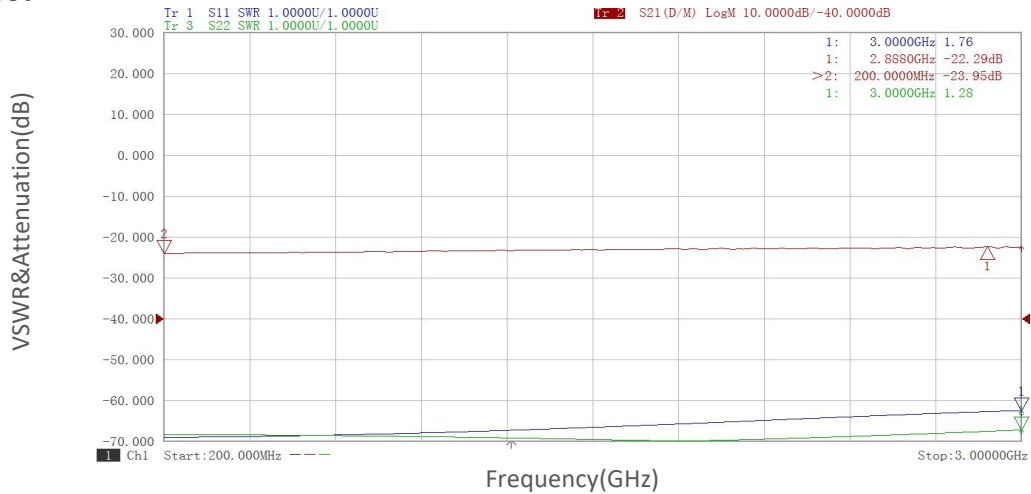


2.5V:

VSWR&Attenuation vs Frequency

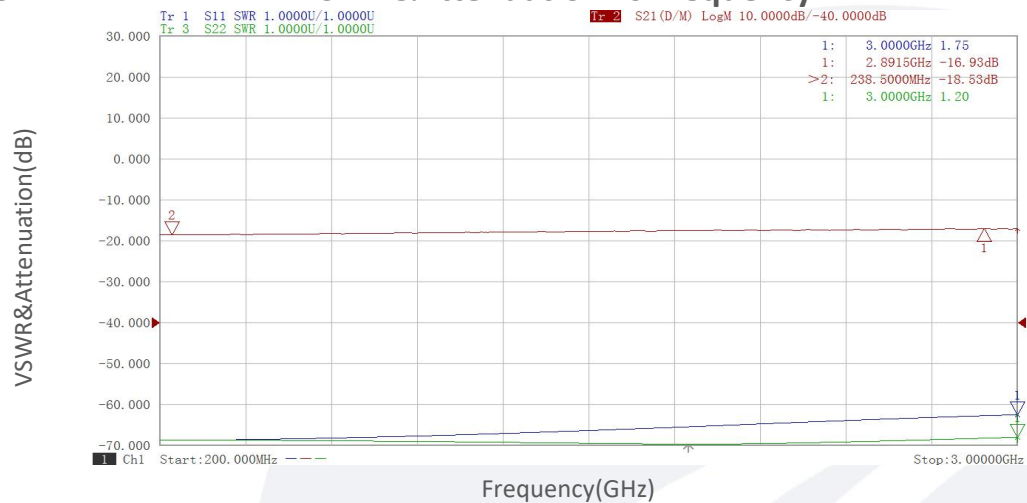

3V:

VSWR&Attenuation vs Frequency

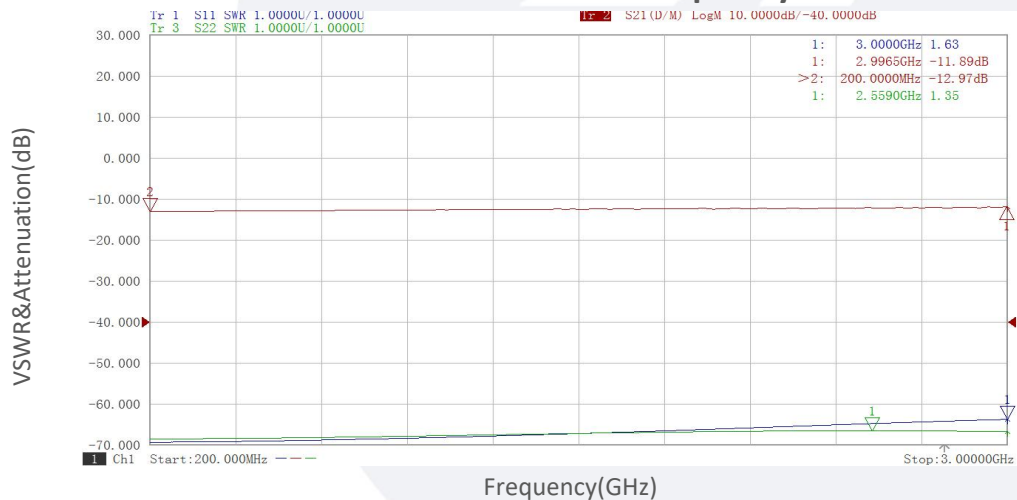


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

3.5V:

VSWR&Attenuation vs Frequency

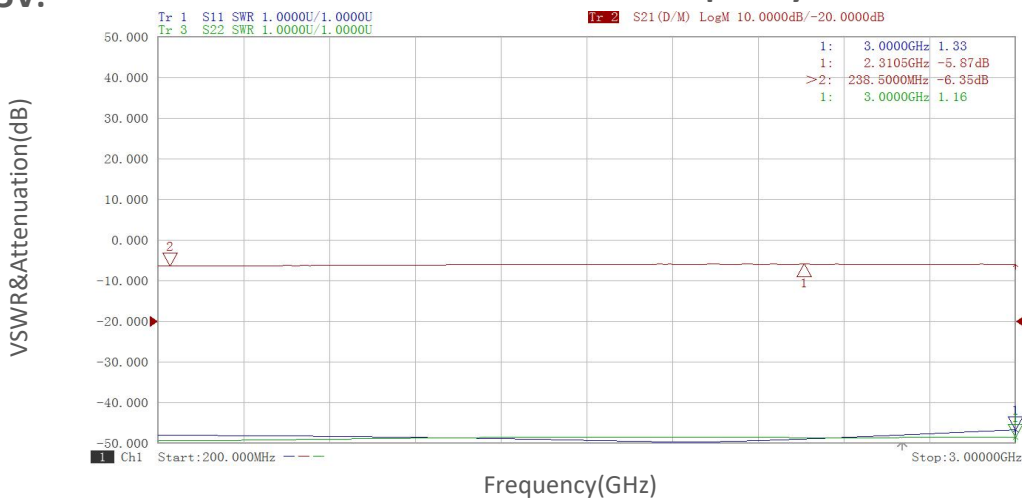


4V:

VSWR&Attenuation vs Frequency



4.5V:

VSWR&Attenuation vs Frequency

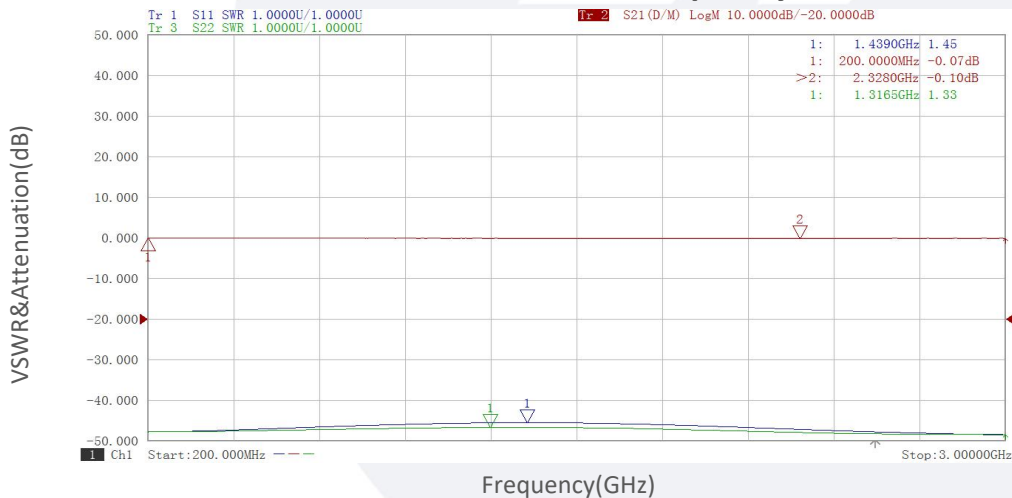


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

5V:

VSWR&Attenuation vs Frequency

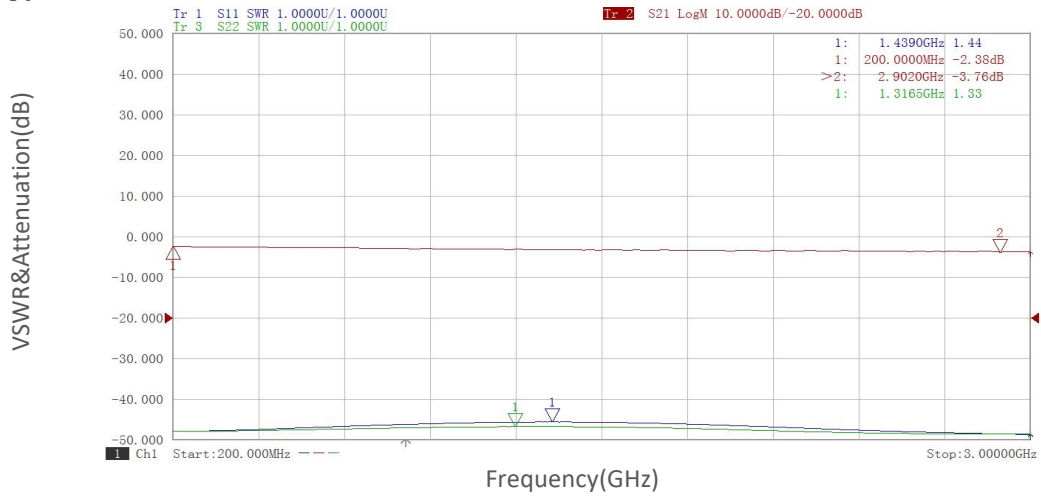

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.