

Power Amplifier

18-40GHz /45dB Gain/40 dBm Psat

Model: TLPA18G40G-45-40

TLPA18G40G-45-40 is a power amplifier with power gain of 45 dB and a nominal Psat of 40 dBm across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +18 VDC/5 A. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Ultra Wide Band: 18-40GHz
- Gain: 45dB Typ
- Output Power Psat: 40dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	18-40			GHz
Power Gain	40	45		dB
Gain Flatness		±4	±5	dB
Output P1dB		32		dB
Output Psat	37	40		dBm
Spurious		-60		dBc
Harmonics		-20		dBc
Input VSWR		2		:1
DC Voltage		18		V DC
DC Supply Current		5		A
Impedance	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92 Female/2.92 Female	
DC Supply Connector	Solder Pin	
Size	90*120*18(Without Heatsink) 132*165*67.5(With Heatsink)	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+20V
RF Input Power	0dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

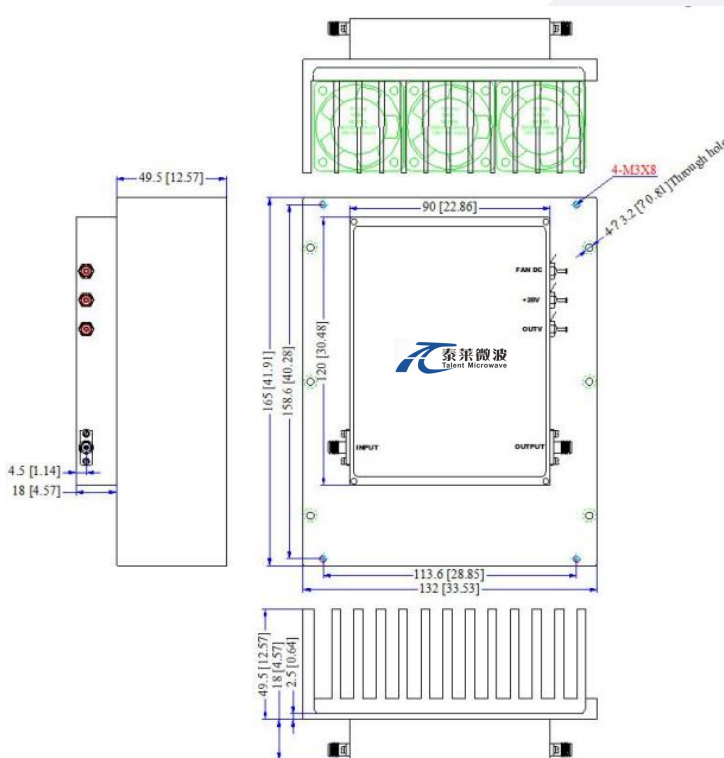

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+50	°C
Non-operating Temperature*	-50		+60	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA18G40G-45-40	Power amplifier 18-40GHz,Gain:45dB,Psat:40dBm, +18V DC,Without Heatsink	Rev.1.1
TLPA18G40G-45-40-HS	Power amplifier 18-40GHz,Gain:45dB,Psat:40dBm, +18V DC,With Heatsink	Rev.1.1

Typical Performance Data:


Input VSWR vs Frequency

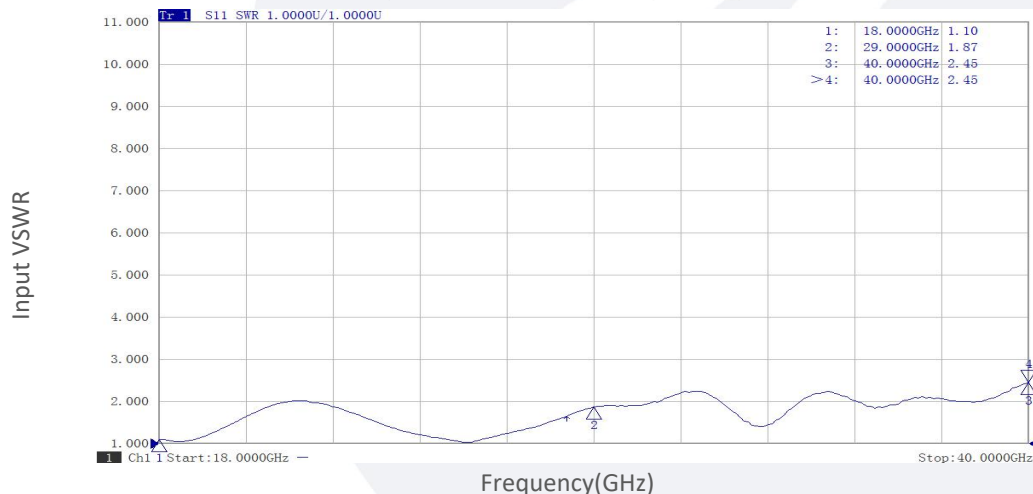


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Small Signal Gain vs Frequency

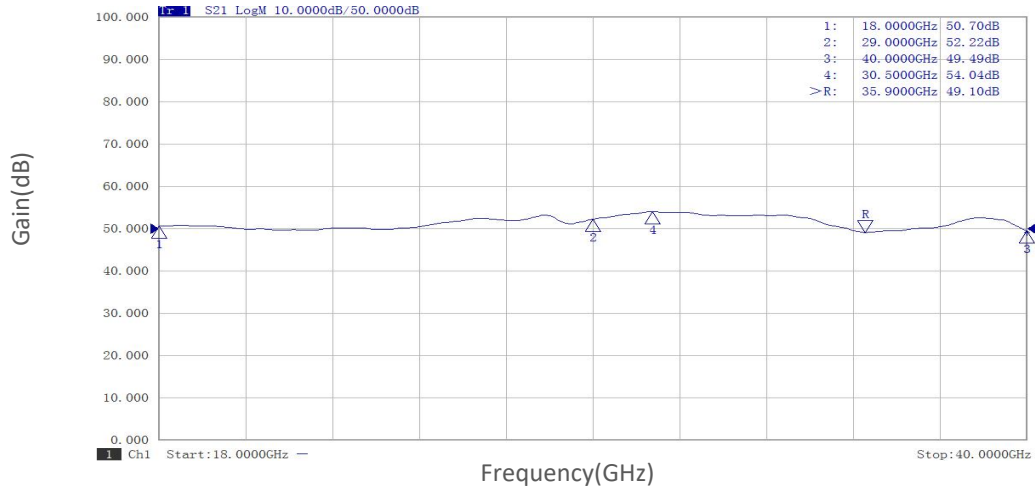

PndB vs Frequency

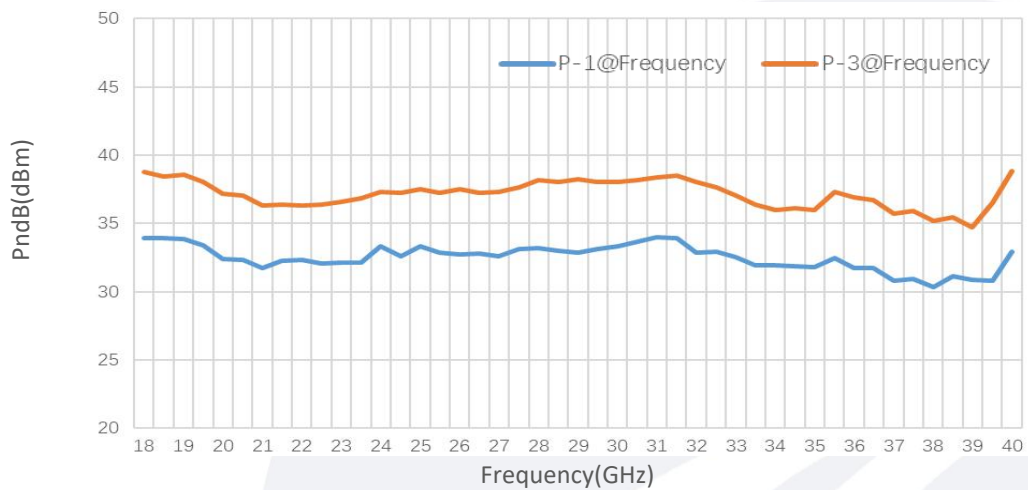


Pout@Pin

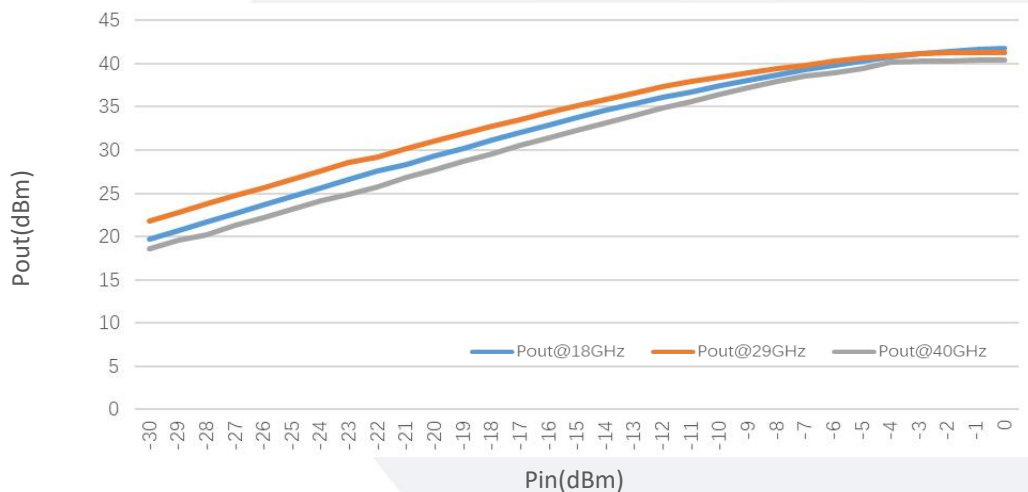


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Pout@Equal_Pin

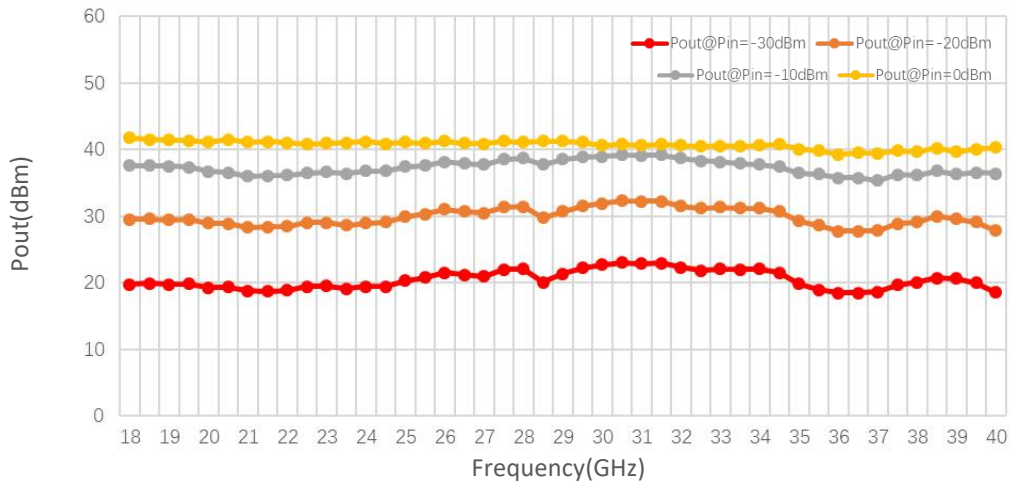

Spurious vs Frequency

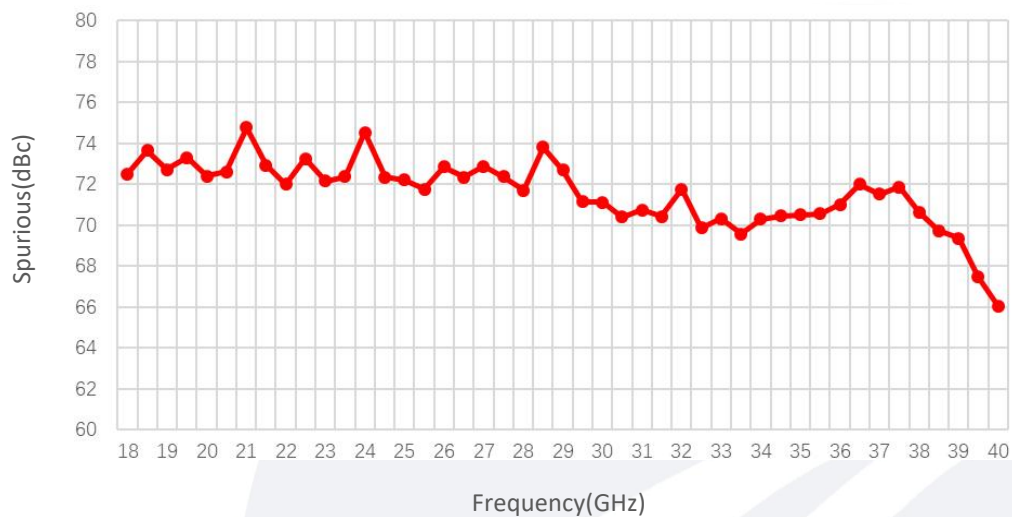

Harmonic vs Frequency

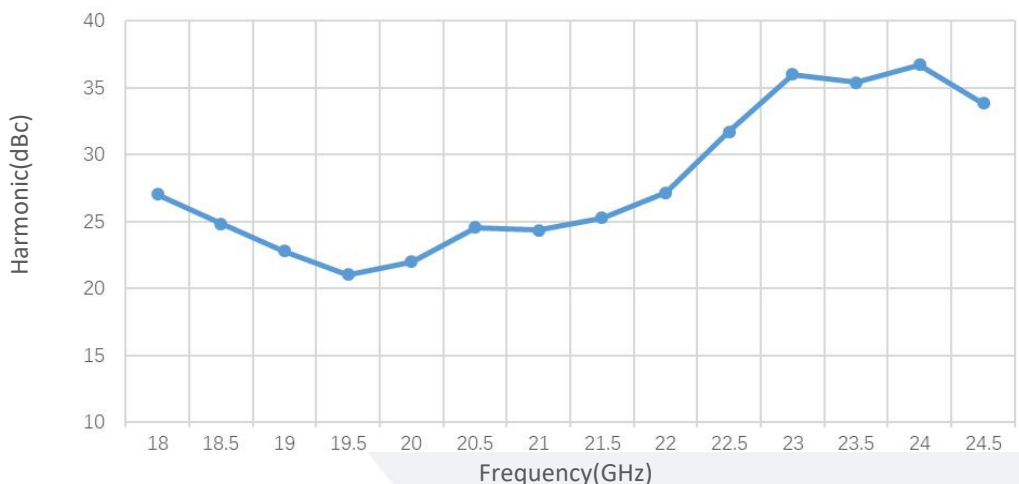

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.