

Low Noise Amplifier

6-18GHz /3dB NF/41dB Gain/28 dBm P1dB**Model: TLLA6G18G-41-40**

TLLA6G18G-41-40 is a low noise amplifier with a typical small signal gain of 43 dB and a nominal noise figure of 3 dB across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +15 V DC/520 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:6-18GHz
- Gain: 43dB Typ
- Noise Figure: 3dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6		18	GHz
增益 Gain	41	43		dB
增益平坦度 Gain Flatness		±1.5	±2	dB
噪声系数 Noise Figure		3	4	dB
线性输出功率 Output P1dB	26	28		dBm
饱和输出功率 Output Psat		29		dBm
输入驻波 Input VSWR		1.6		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		15		V DC
直流电流 DC Supply Current		520		mA
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

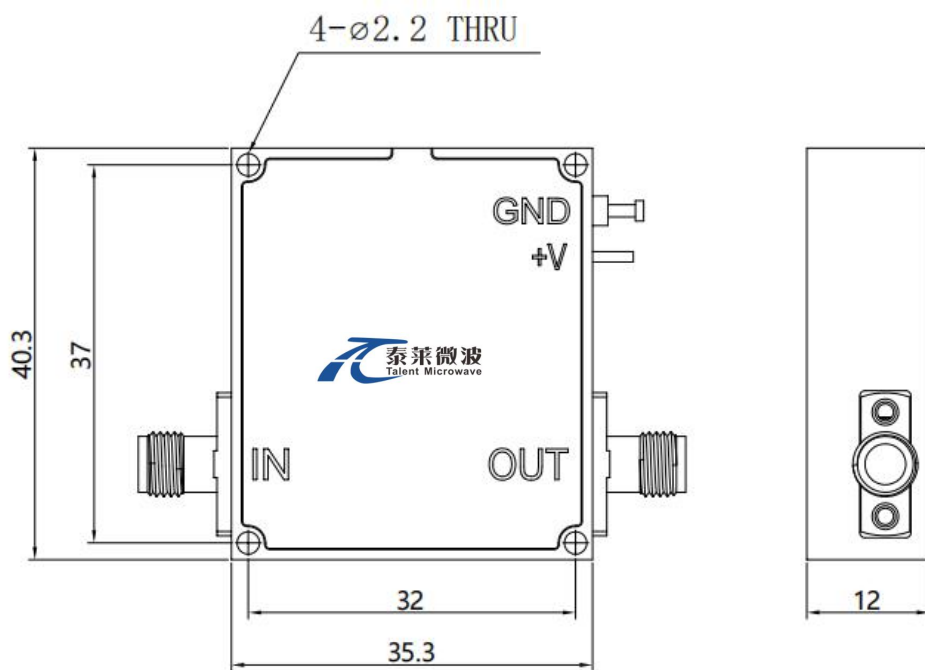

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA6G18G-41-40	Low Noise Amplifier, 6-18GHz, Noise Figure:4.0dB, Gain:41 dB,P1dB:28dBm,+15V DC,Without Heatsink	Rev.1.1
TLLA6G18G-41-40-HS	Low Noise Amplifier, 6-18GHz, Noise Figure:4.0dB, Gain:41 dB,P1dB:28dBm,+15V DC,With Heatsink	Rev.1.1