

Coaxial Termination

DC-40GHz/SSMA/1W

Model: TT1-40-SSMA

Features:

- Operating Frequency DC to 40 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
频率范围 Frequency Range		DC		40	GHz
驻波 VSWR	@DC-18GHz			1.21	:1
	@DC-30GHz			1.30	
	@DC-40GHz			1.40	
耐功率 Power Handling				1	W
阻抗 Impedance			50		Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-55 To +125	℃
存储温度 Storage Temerature	-55 to +125	℃
中心导体 Center Conductor	Gold-plated,beryllium bronze	
接口 Connectors	Passivated Stainless Steel	
重量 Weight	2	g

外形图 Outline Drawing:

Unit:mm

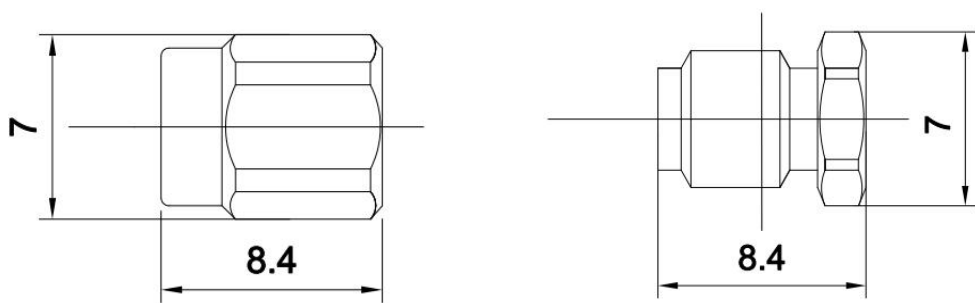


订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TT1-40-SSMA	DC-40GHz,1W,SSMA Coaxial Termination


典型曲线 Typical Performance Data:

VSWR vs Frequency

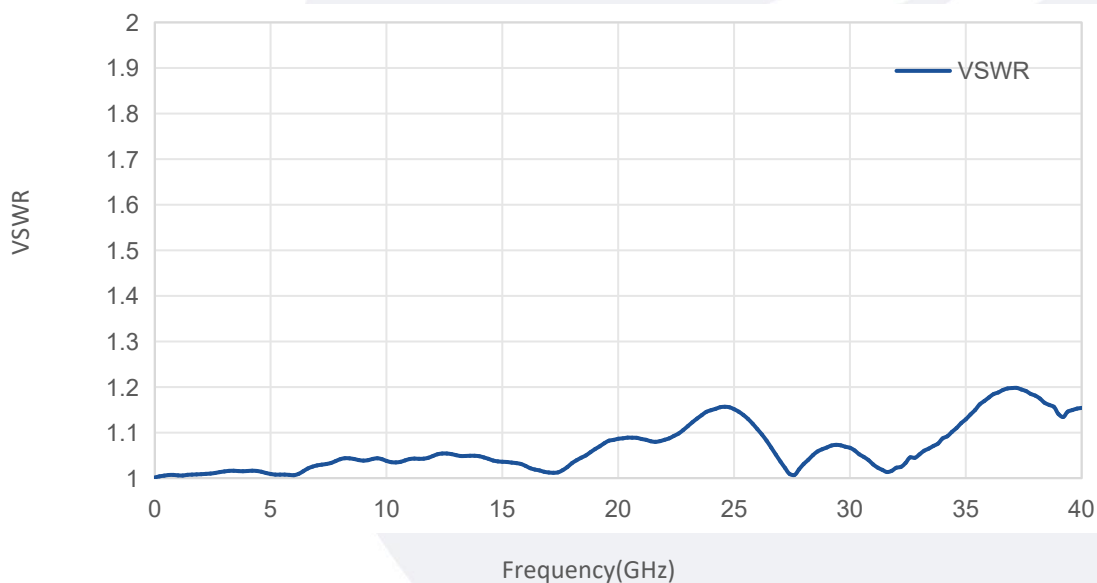

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

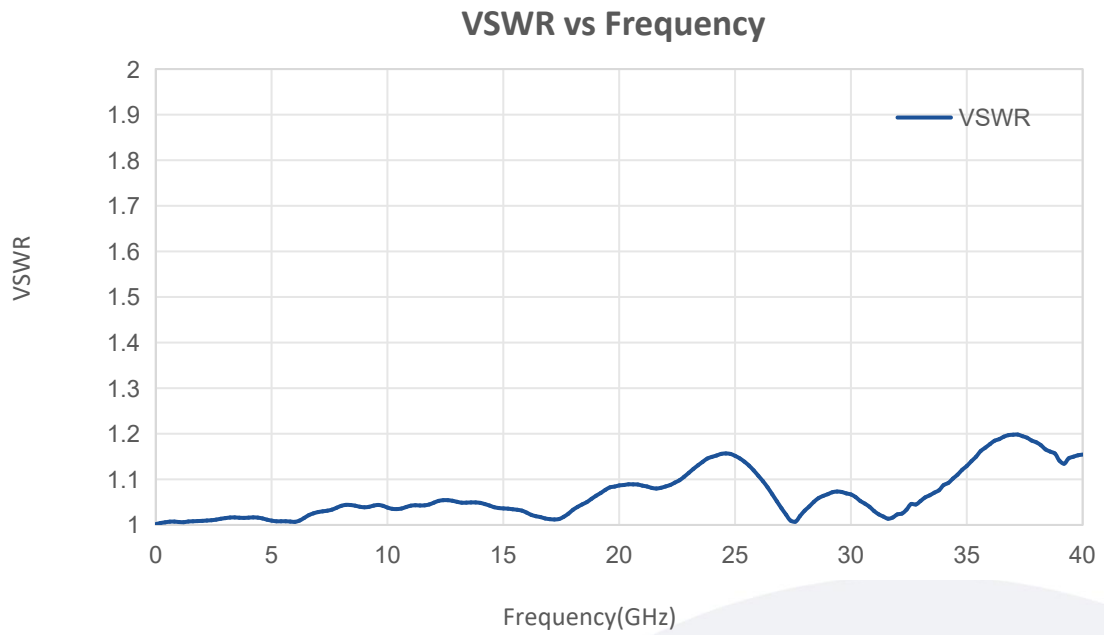

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.