

## Part No: TDCB1M1F-3

50KHz-110GHz, 16V, 1.0mm Male-Female DC Block

## 电气特性 Electrical:


|                      |                  |
|----------------------|------------------|
| 工作频率 Frequency:      | 50KHz-110GHz     |
| 插损 Insertion Loss:   | 2.5 dBMax        |
| 驻波 VSWR:             | 1.95Max, 1.5 typ |
| 群延时 Group Delay      | 74.3ps typ       |
| 工作电压 DC Voltage:     | 16 VOLTS typ     |
| 耐受功率 Power Handling: | +27dBm           |
| 阻抗 Impedance:        | 50 OHMS          |

## 机械特性 Mechanical:

|                             |                      |
|-----------------------------|----------------------|
| 操作温度 Operation Temperature: | -45~+70°C            |
| 存储温度 Storage Temperature:   | -55~+125°C           |
| 壳体 Body Material:           | Golden Plated Copper |
| 内导体 Center conductor:       | Becu, Golden         |
| 接口 Connectors:              | 1.0mm Male to Female |
| 相对湿度 Relative Humidity:     | 0 ~ 90%              |

## 外形尺寸 Outline Drawing:

Unit: mm

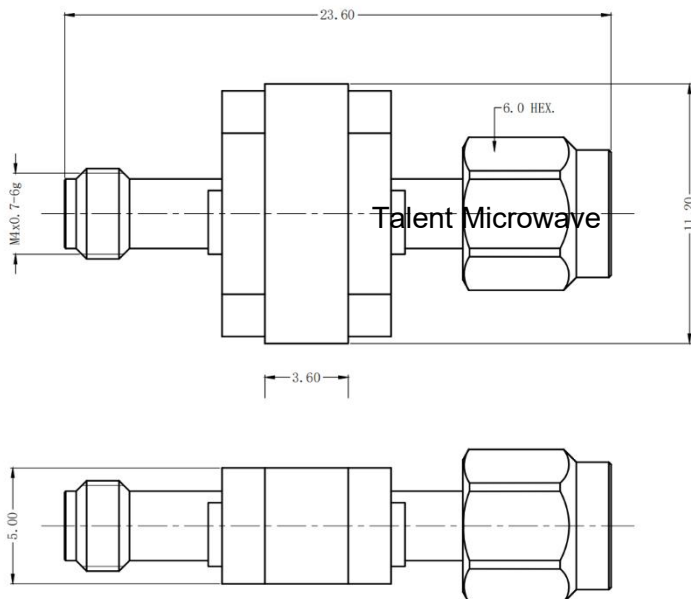

## 测试曲线 (Test Curve)

