

Power Amplifier

1-6GHz /47dB Gain/47 dBm Psat

Model: TLPA1G6G-47-47-V2

TLPA1G6G-47-47-V2 is a power amplifier with a typical small signal gain of 47 dB and Psat of 47 dBm across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/5 A. The input and output port configuration offers coax adapter structure with SMA female .

Features:

- Ultra Wide Band: 1-6 GHz
- Gain: 47dB Typ
- Output Power Psat: 47dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	1-6			GHz
小信号增益 Small Signal Gain	45	47		dB
增益平坦度 Gain Flatness		±4	±5	dB
线性输出功率 Output P1dB	44.5	45.5		dBm
饱和输出功率 Output Psat		47		dBm
谐波 Harmonic		-15	-13	dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage		28		V DC
直流电流 DC Supply Current		5	6	A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流供电接口 DC Supply Connector	DSUB-9 Male	
尺寸 Size	220*180*25(Without heatsink) 300*200*70(With heatsink)	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+8 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

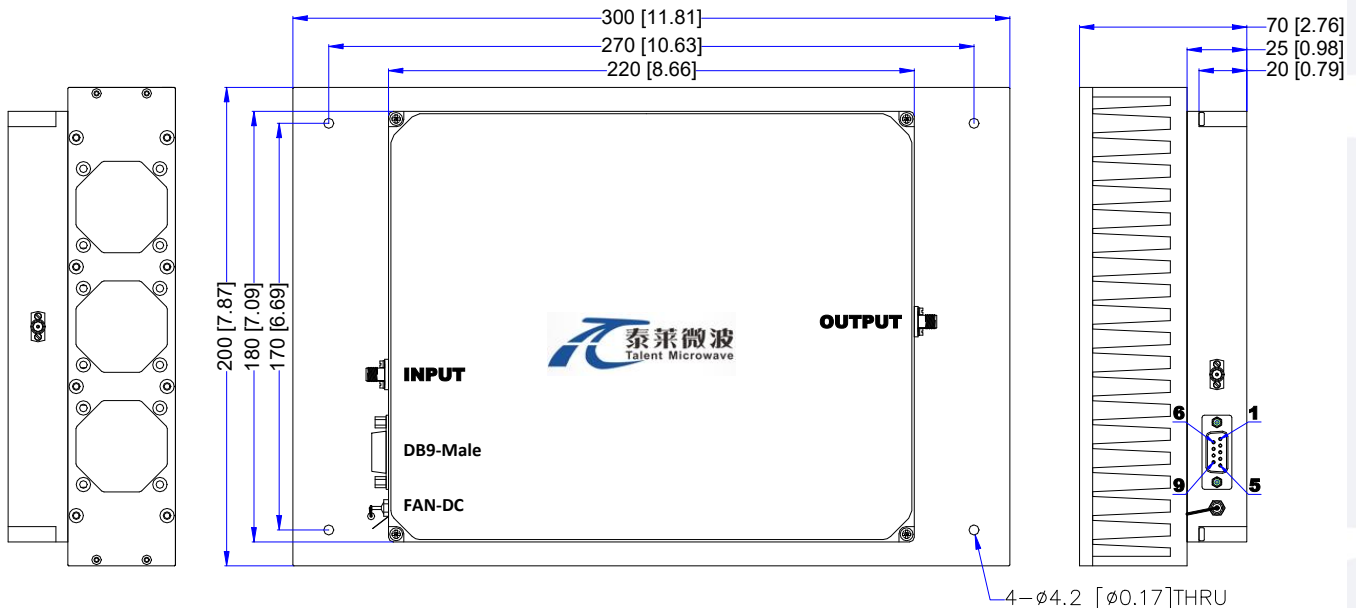

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

直流供电接口 DC Supply Connector (DSUB-9 Male):

引脚 Pin	名称 Name	功能 Function
1	+28V	+28.0-30.0VDC
2	+28V	+28.0-30.0VDC
3	+28V	+28.0-30.0VDC
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	NC	NC
8	NC	NC
9	NC	NC

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	°C
存储温度 Non-operating Temperature*	-30		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA1G6G-47-47-V2	Power amplifier 1-6GHz, Gain:47dB, Psat:47dBm, +28V DC, Without Heatsink	Rev.1.1
TLPA1G6G-47-47-V2-HS	Power amplifier 1-6GHz, Gain:47dB, Psat:47dBm, +28V DC, With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

VSWR&Gain vs Frequency

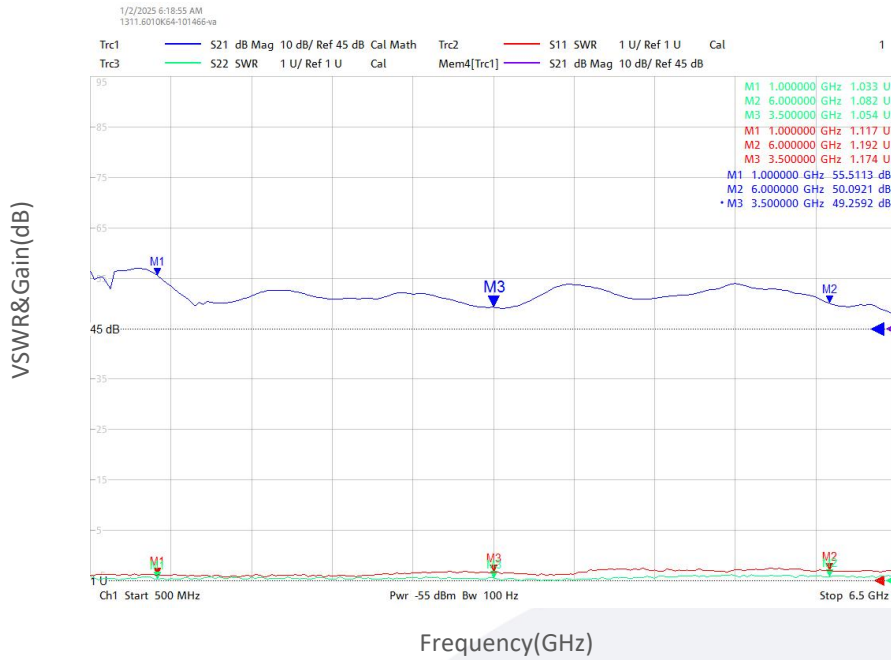

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.