

Power Amplifier

40-50GHz/33dB Gain/33dBm Psat

Model: TLPA40G50G-33-33

TLPA40G50G-33-33 is a power amplifier with a minimum power gain of 33 dB and a minimum Psat of 33 dBm across the frequency range of 40 to 50 GHz. The DC power requirement for the amplifier is +18VDC/2.5 A. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Frequency range: 40-50GHz
- Gain: 33dB Min
- Output Power Psat: 33dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	40-50			GHz
Power Gain	33			dB
Gain Flatness		±2.5		dB
Output Psat	33	34		dBm
Spurious			-50	dBc
Input VSWR		3		:1
DC Voltage		18	20	V DC
DC Supply Current			2.5	A
Impedance	50			Ohms

Mechanical Specifications:




Parameter	Value	Units
Input /Output Connector	2.4mm Female/2.4mm Female	
DC Bias	Feedthru capacitors	
Size	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
Weight	≤300	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+20 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

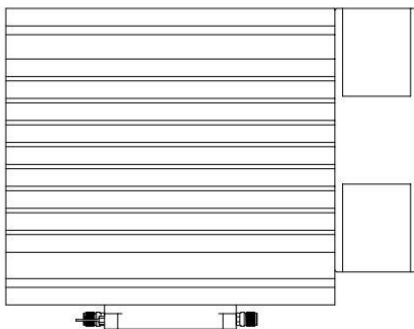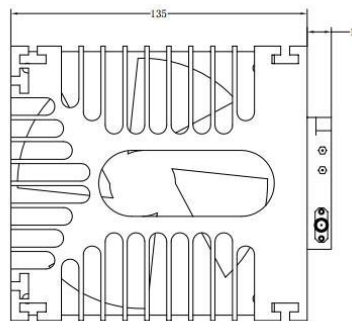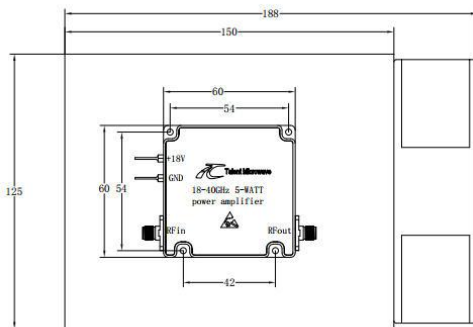

Regulatory Compliance:



*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA40G50G-33-33	Power amplifier 40-50GHz, Gain:33dB,Psat:33dBm,+18V DC,Without Heatsink	Rev.1.1
TLPA40G50G-33-33-HS	Power amplifier 40-50GHz, Gain:33dB,Psat:33dBm,+18V DC,With Heatsink	Rev.1.1


Typical Performance Data:

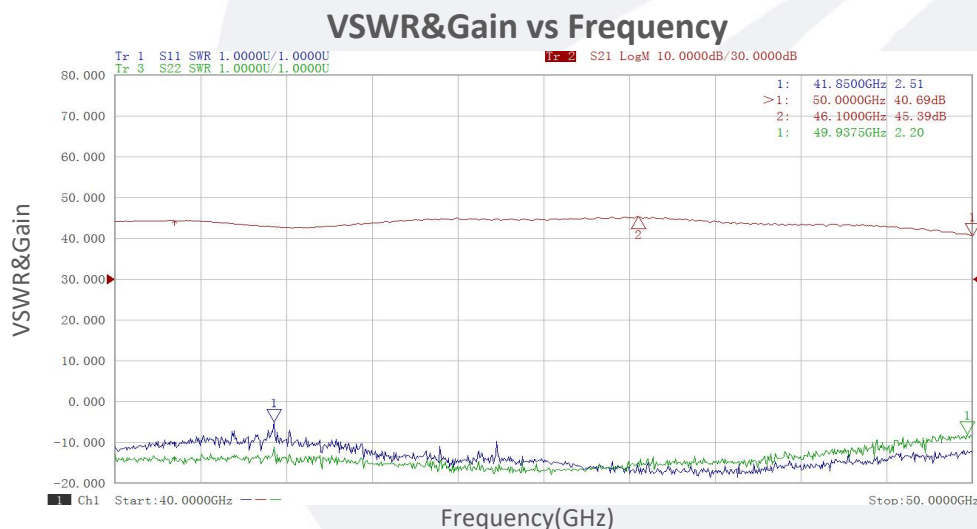


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Gain vs Output Power

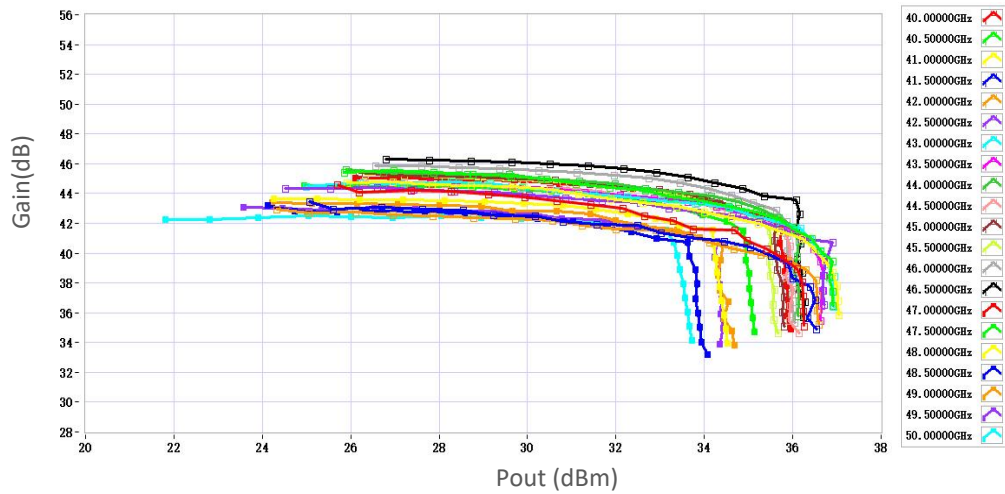

P1dB vs Frequency

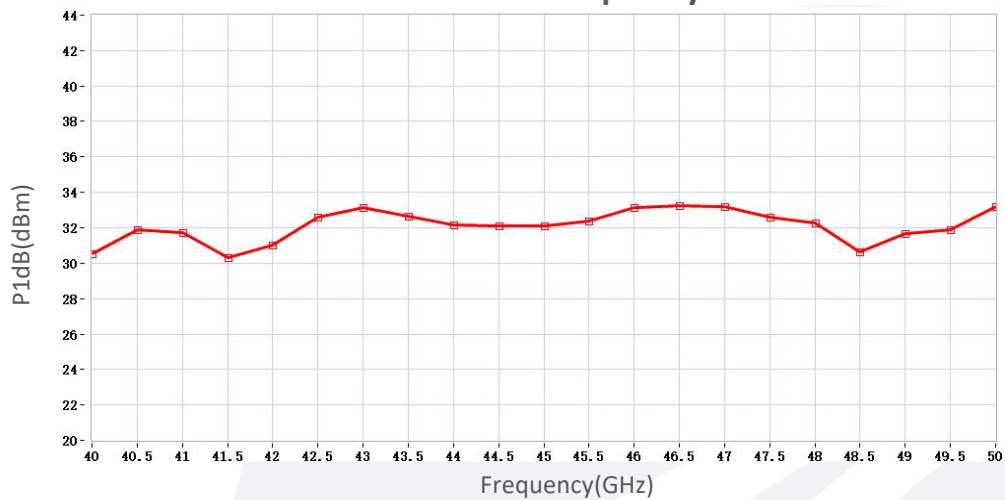


P3dB vs Frequency

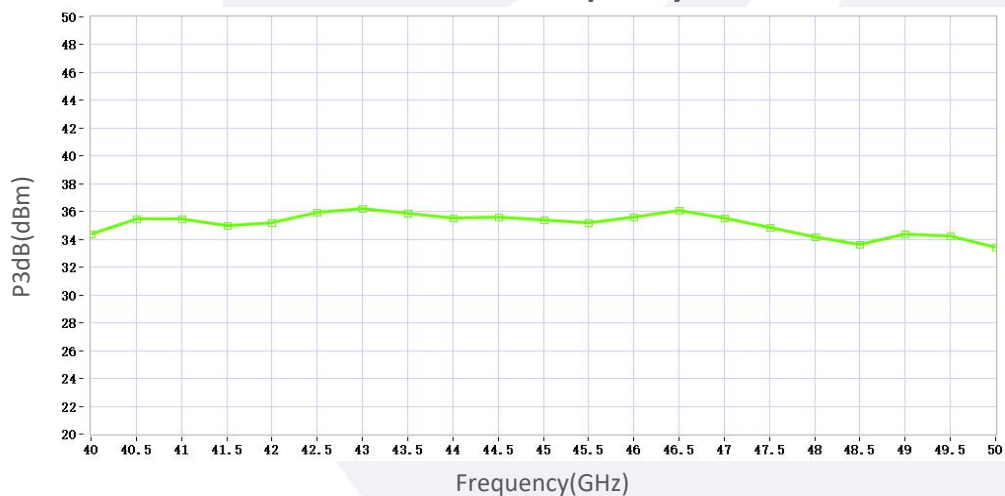

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Psat vs Frequency

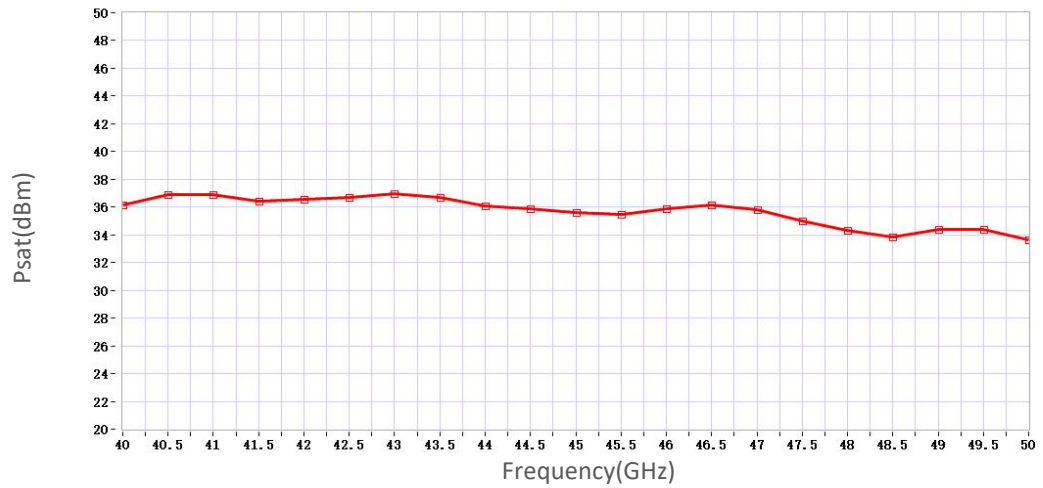

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.