

Power Amplifier

18-40GHz/40dB Gain/37dBm Psat

Model: TLPA18G40G-40-37

TLPA18G40G-40-37 is a power amplifier with a minimum small signal gain of 40 dB and a nominal Psat of 37 dBm across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +20 VDC/90W. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 18-40GHz
- Gain: 40dB Min
- Output Power Psat: 37dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	18-40			GHz
Small Signal Gain	40	45		dB
Output P1dB	30	32		dBm
Output Psat		37		dBm
Spurious			-50	dBc
Input VSWR		2		:1
DC Voltage		20		V DC
Power Consumption			90	W
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Feedthru capacitors	
Size	60*60*11(Without heatsink) 188*125*135(With heatsink)	mm
Weight	≤200	g



Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+22 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V


Outline Drawing:

Unit:mm

Regulatory Compliance:

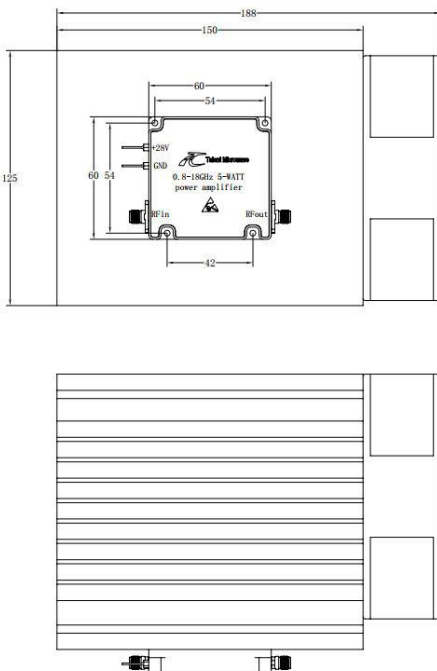

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+60	°C
Non-operating Temperature*	-50		+70	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA18G40G-40-37	Power amplifier 18-40GHz, Gain:40dB,Psat:37dBm,+20V DC,Without Heatsink	Rev.1.1
TLPA18G40G-40-37-HS	Power amplifier 18-40GHz, Gain:40dB,Psat:37dBm,+20V DC,With Heatsink	Rev.1.1

Typical Performance Data:


Input VSWR vs Frequency

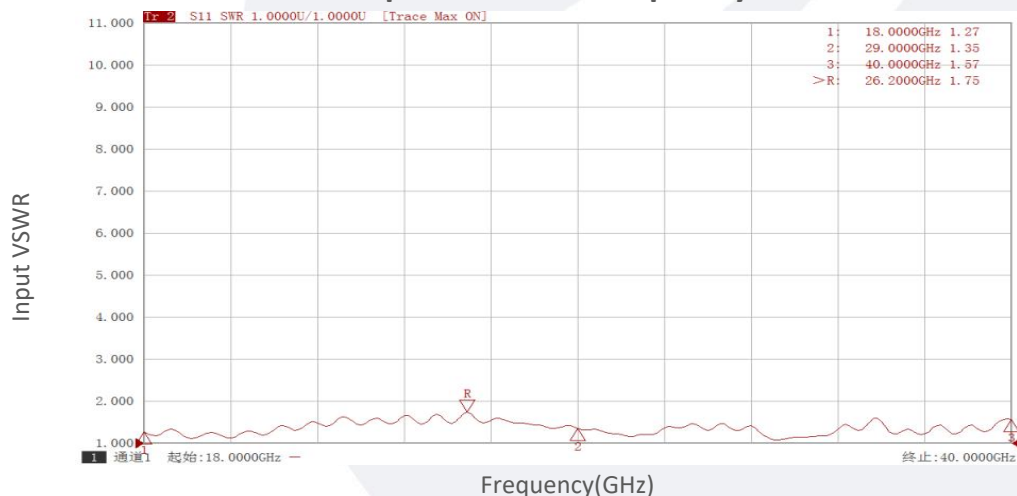


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Small Signal Gain vs Frequency

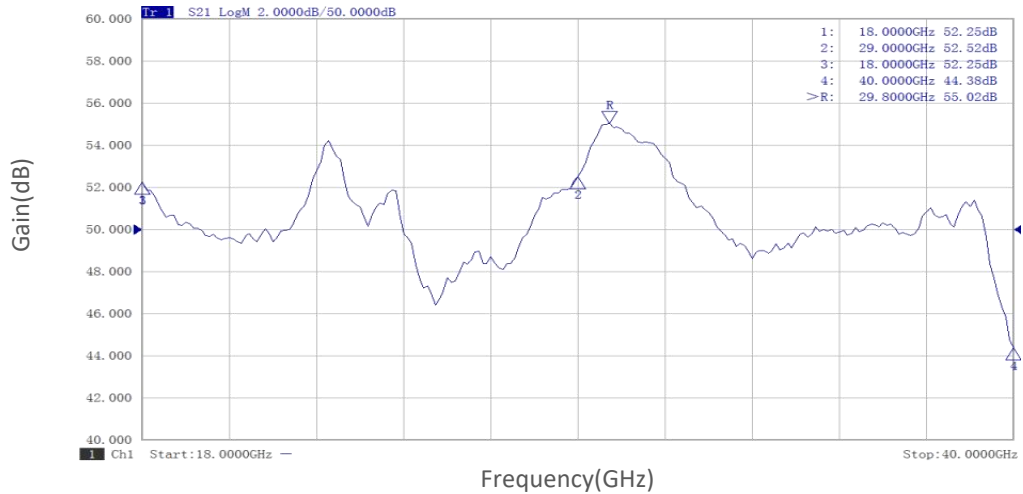

P1dB vs Frequency

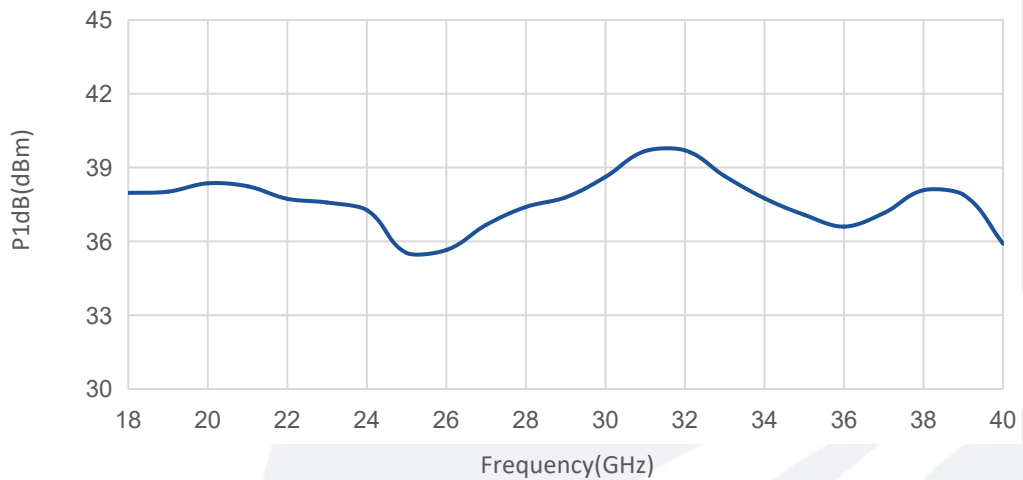


Pout@Pin

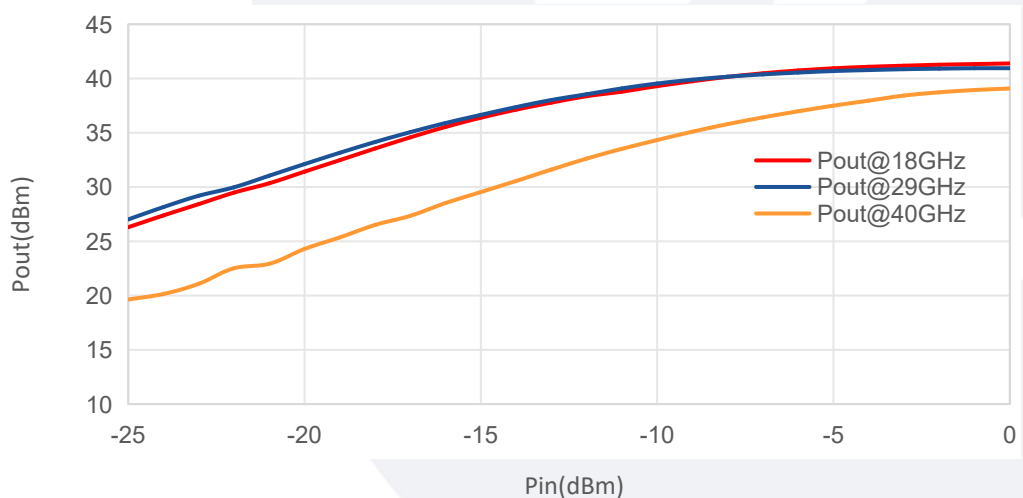


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Pout@Equal_Pin

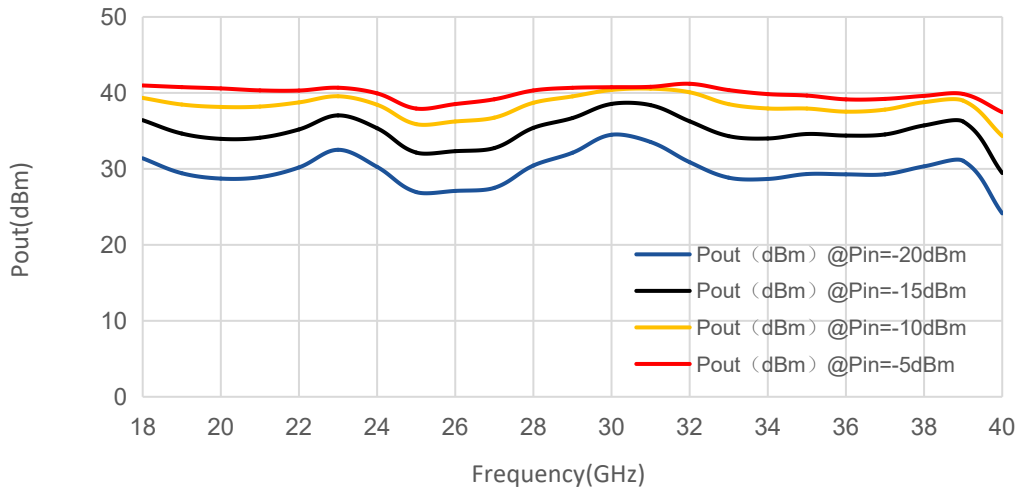

Spurious vs Frequency

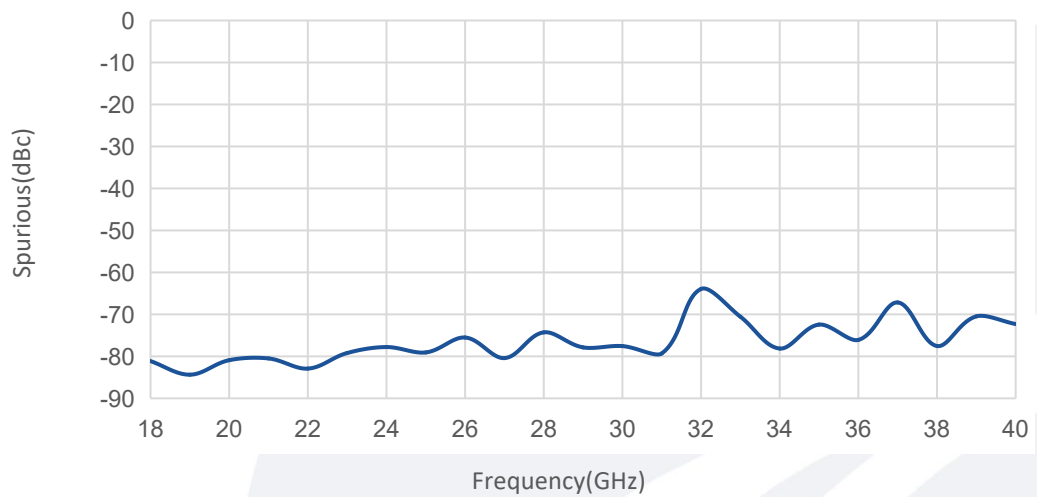

Harmonic vs Frequency

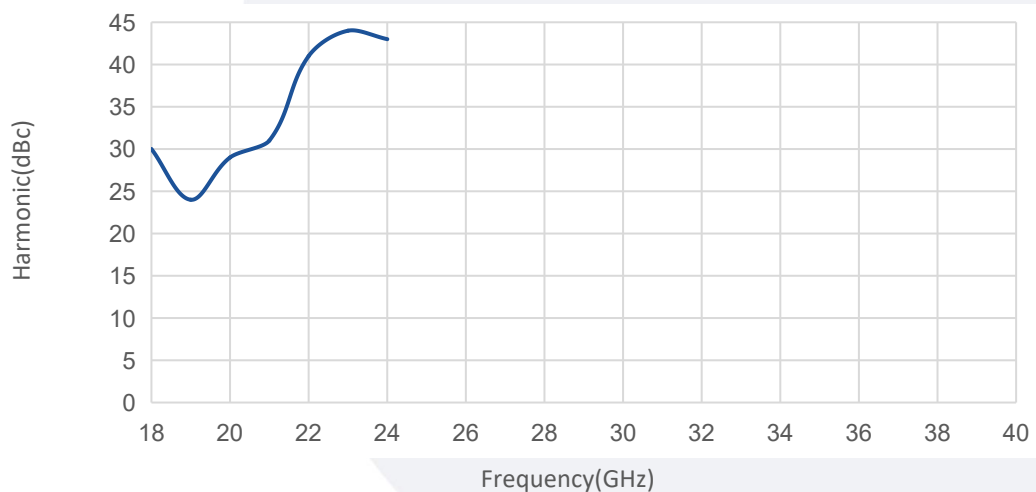

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.