

W-Band Power Amplifier

WR-10/75-110GHz/30dB Gain/27 dBm Psat

Model: TMPA-075110-3028-10

TMPA-075110-3028-10 is a W-Band power amplifier with a typical small signal gain of 30 dB and a nominal Psat of 27 dBm across the frequency range of 75 to 110 GHz. The DC power requirement for the amplifier is +16 VDC/1.2 A. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M antickocking flanges.

Features:

- Ultra Wide Band: 75-110 GHz
- Gain: 30dB Typ
- Output Power Psat: 27dBm Typ
- Good Power and Gain Flatness

Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	75-110			GHz
小信号增益 Small Signal Gain		30		dB
功率增益 Power Gain		23		dB
输出功率1dB压缩点 Output P1dB		25		dBm
饱和输出功率 Output Psat		27		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2.2		:1
直流电压 DC Voltage		16	18	V DC
直流电流 DC Supply Current		1.2		A


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	WR-10/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	56*54*24(Without Heatsink) 87*54*68(With Heatsink)	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+18 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

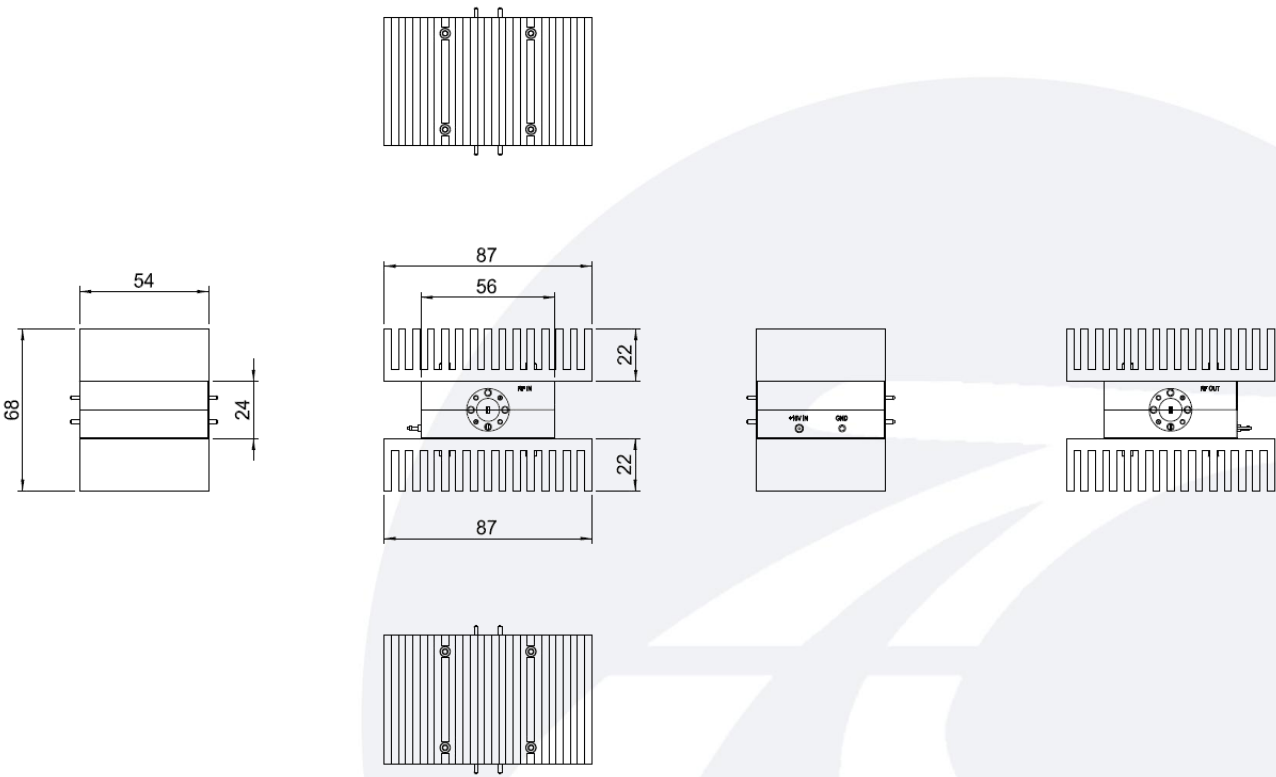

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMPA-075110-3028-10	Power Amplifier, 75-110 GHz, Gain:30 dB Type, Psat:27dBm Typ, +16V DC,WR-10,Without Heatsink	Rev.1.1
TMPA-075110-3028-10-HS	Power Amplifier, 75-110 GHz, Gain:30 dB Type, Psat:27dBm Typ, +16V DC,WR-10,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Small Signal Gain vs Frequency

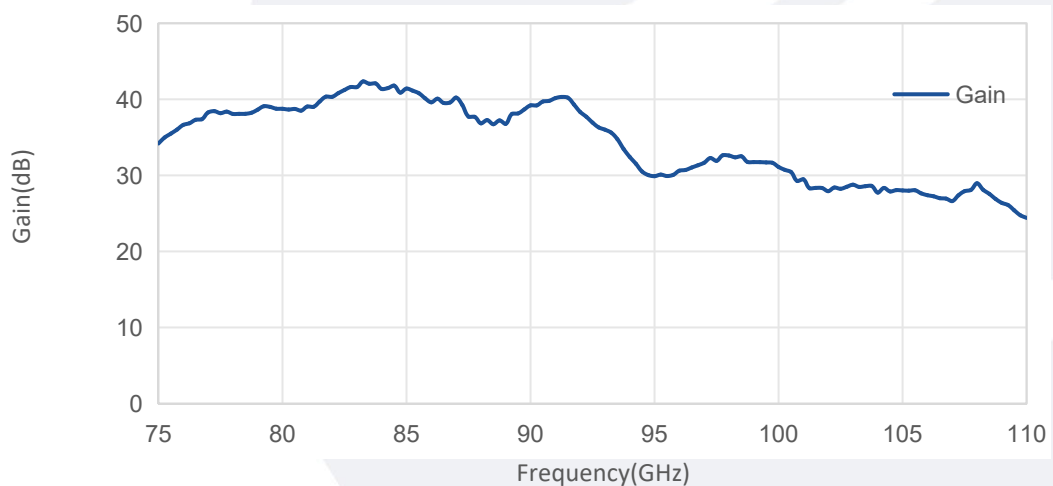


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Input VSWR vs Frequency

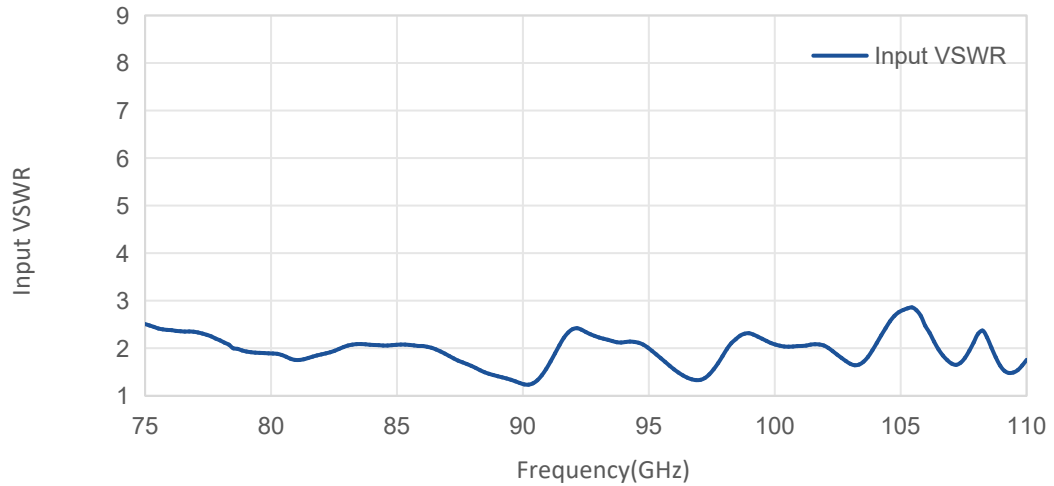

P1dB vs Frequency

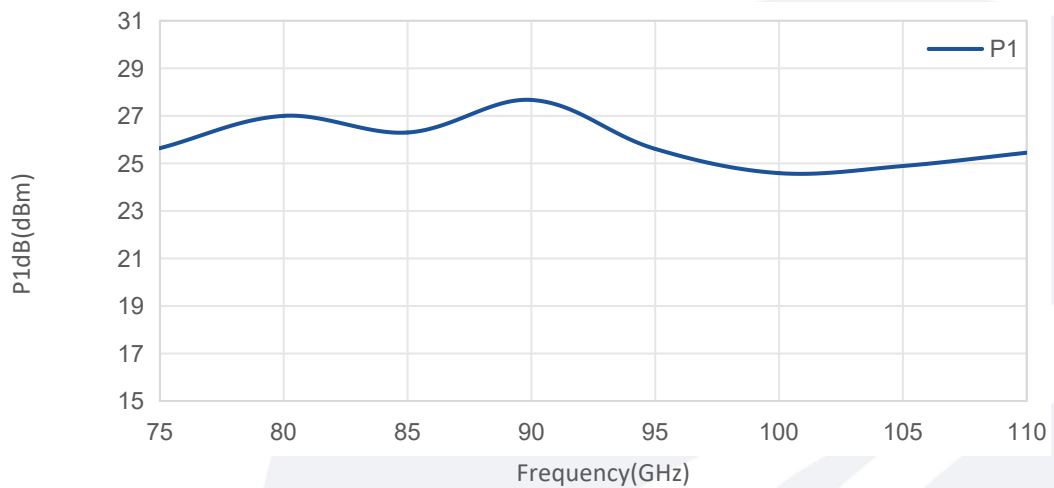

Pout @Pin

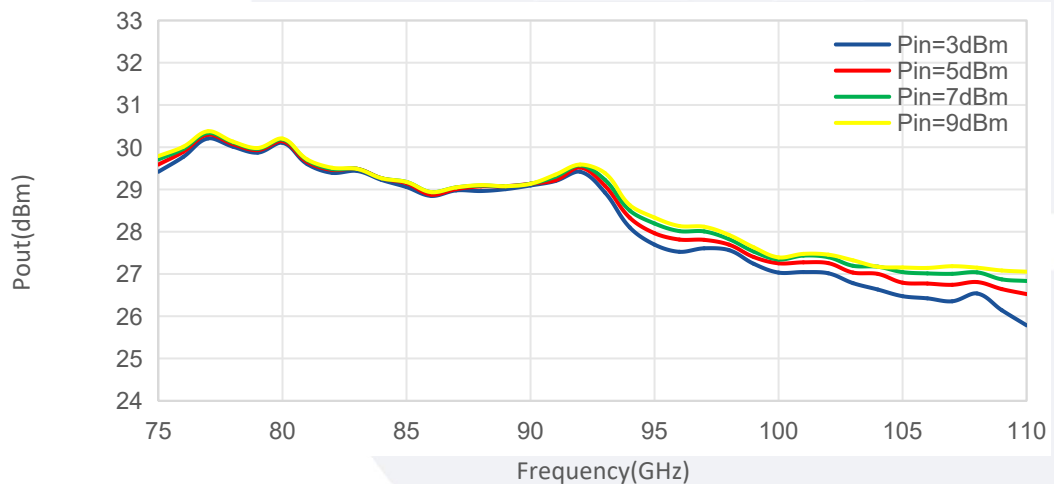

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.