

## Low Noise Amplifier

1-18GHz/2.0dB NF/50dB Gain/15dBm P1dB

Model: TLLA1G18G-50-30

TLLA1G18G-50-30 is a low noise amplifier with a typical small signal gain of 50 dB and a nominal noise figure of 2.0 dB across the frequency range of 1 to 18 GHz. The DC power requirement for the amplifier is +12V DC/90 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 1-18GHz
- Gain: 50dB Typ
- Noise Figure: 2.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	1		18	GHz
小信号增益 Small Signal Gain		50		dB
增益平坦度 Gain Flatness		±2.0		dB
噪声系数 Noise Figure		2.0	3.0	dB
线性输出功率 Output P1dB		15		dBm
输入驻波 Input VSWR		1.7	2.5	:1
输出驻波 Output VSWR		1.7	2.5	:1
直流电压 DC Voltage	+8	+12	+15	V DC
直流电流 DC Supply Current		90		mA
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm
重量 Weight	50	g

### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

### 外形图 Outline Drawing:

Unit:mm

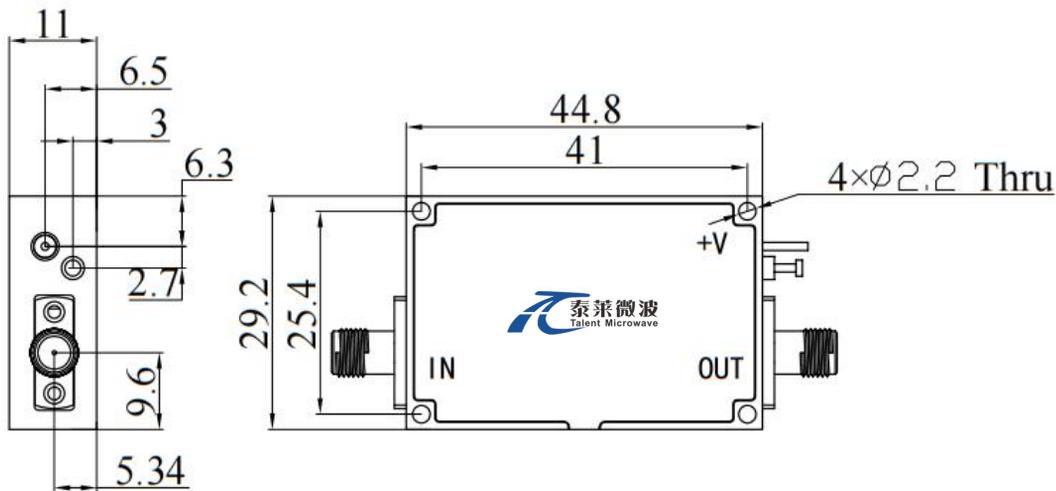

**\*\*\*Heat Sink Required During Operation**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

### 温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA1G18G-50-30	Low Noise Amplifier, 1-18GHz, Noise Figure:2.0dB, Gain:50 dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA1G18G-50-30-HS	Low Noise Amplifier, 1-18GHz, Noise Figure:2.0dB, Gain:50 dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:

### Gain&VSWR vs Frequency



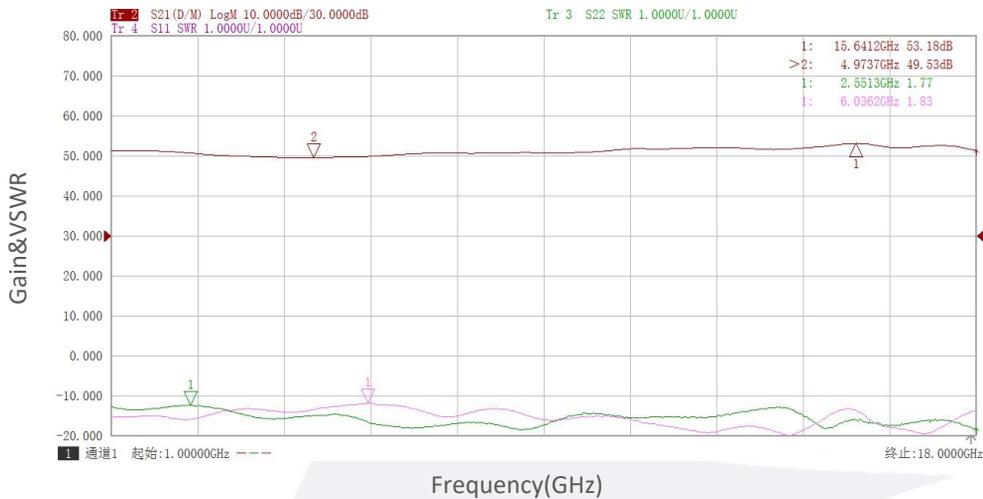


### Noise Figure vs Frequency

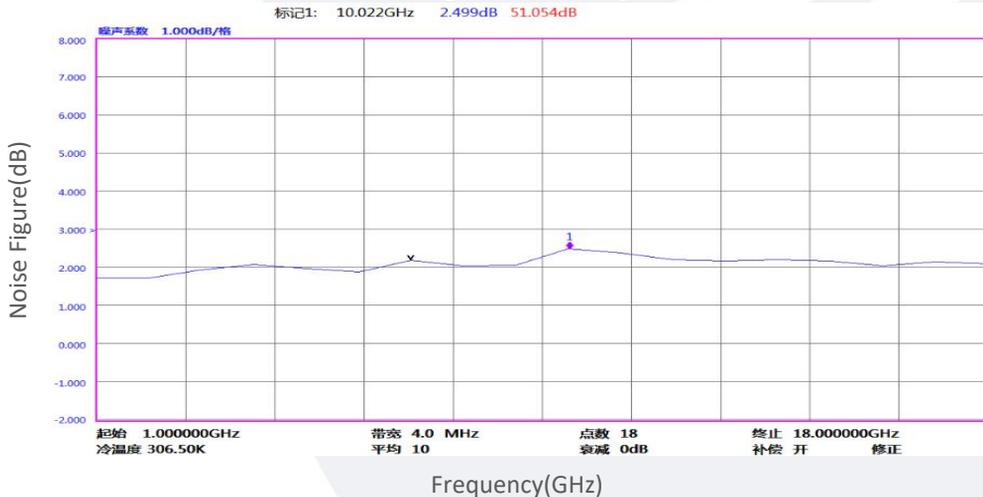

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.


典型曲线 Typical Performance Data:

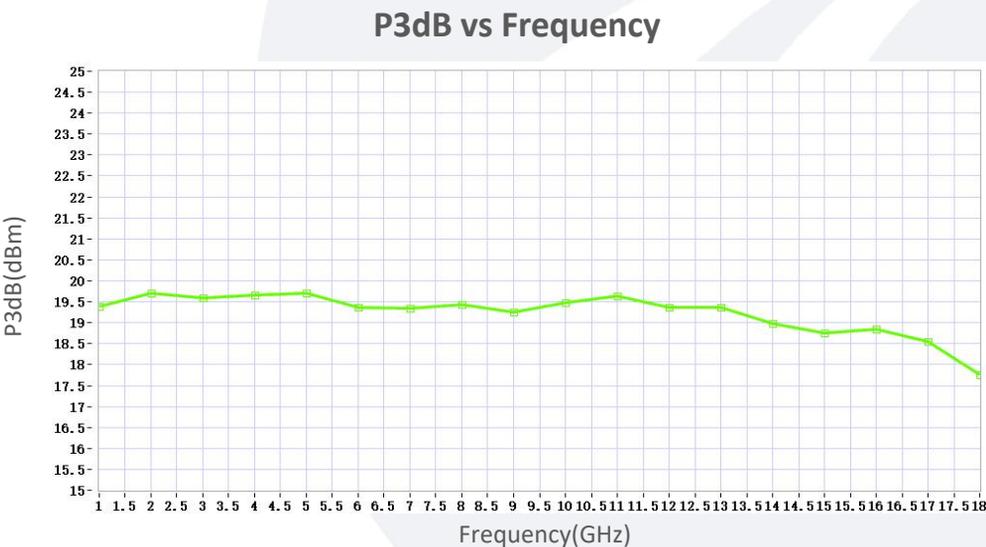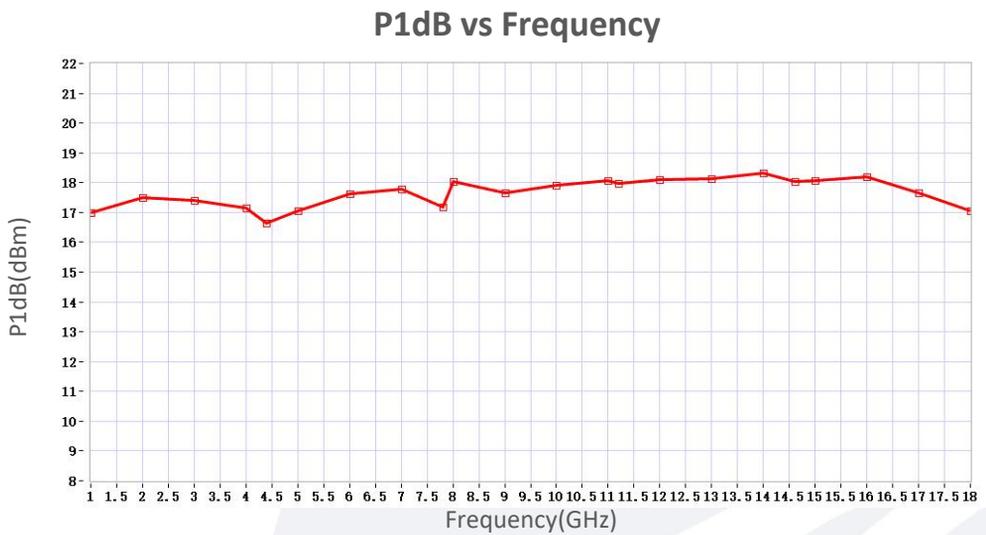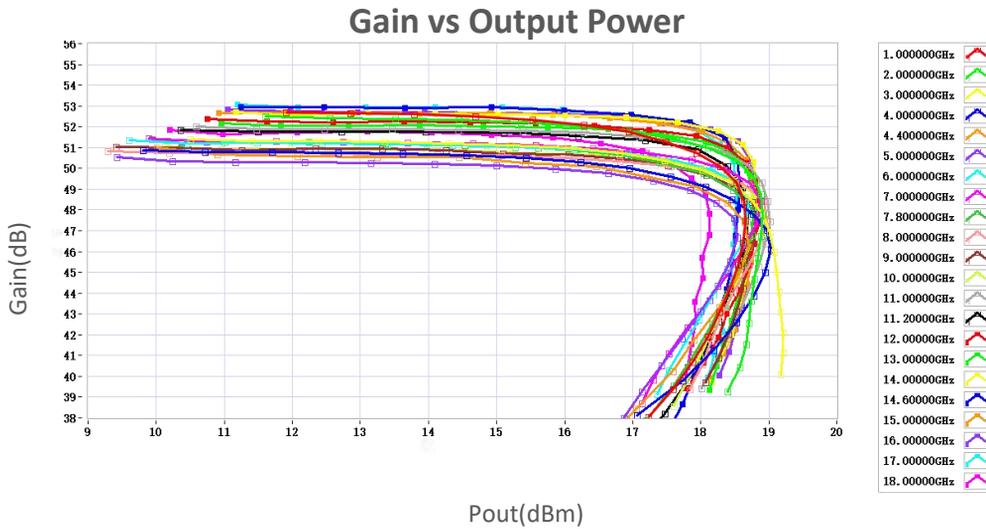

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

## 典型曲线 Typical Performance Data:

### Gain vs Frequency

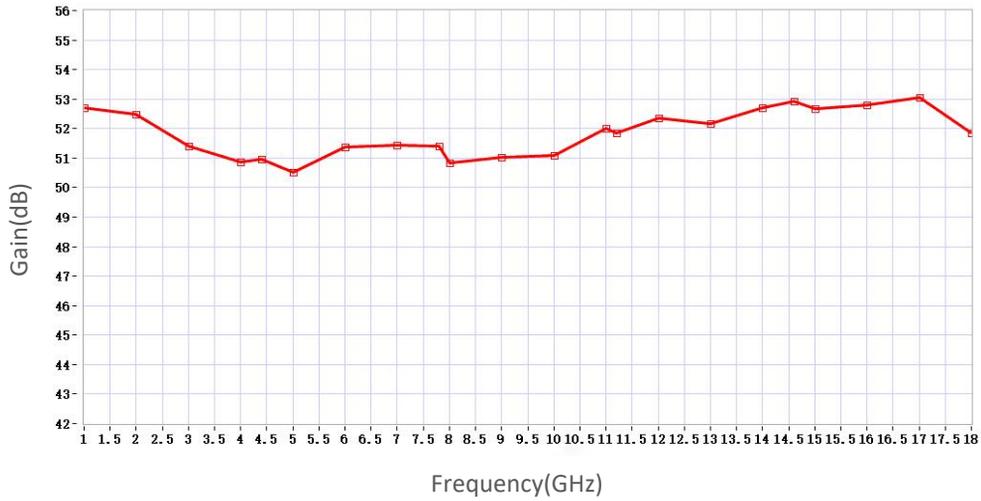

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.