

## Low Noise Amplifier

6-18GHz/2.0dB NF/38dB Gain/22dBm P1dB

Model: TLLA6G18G-38-25

TLLA6G18G-38-25 is a low noise amplifier with a typical small signal gain of 38 dB and a nominal noise figure of 2.0 dB across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +12 V DC/280 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 6-18GHz
- Gain: 38dB Typ
- Noise Figure: 2dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6		18	GHz
小信号增益 Small Signal Gain	35	38	41	dB
增益平坦度 Gain Flatness		±2	±2.5	dB
噪声系数 Noise Figure		2	3	dB
线性输出功率 Output P1dB	20	22		dBm
输出三阶交调 Output IP3	27	30		dBm
杂散 Spurious			-60	dBc
反向隔离 Reverse Isolation	40	45		dB
输入驻波 Input VSWR		1.8	2.5	:1
输出驻波 Output VSWR		1.8	2.5	:1
直流电压 DC Voltage	+10	+12	+15	V DC
直流电流 DC Supply Current	250	280	320	mA
阻抗 Impedance		50		Ohms

### 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	1.5*1*0.4	Inch

### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

### 外形图 Outline Drawing:

Unit: Inch

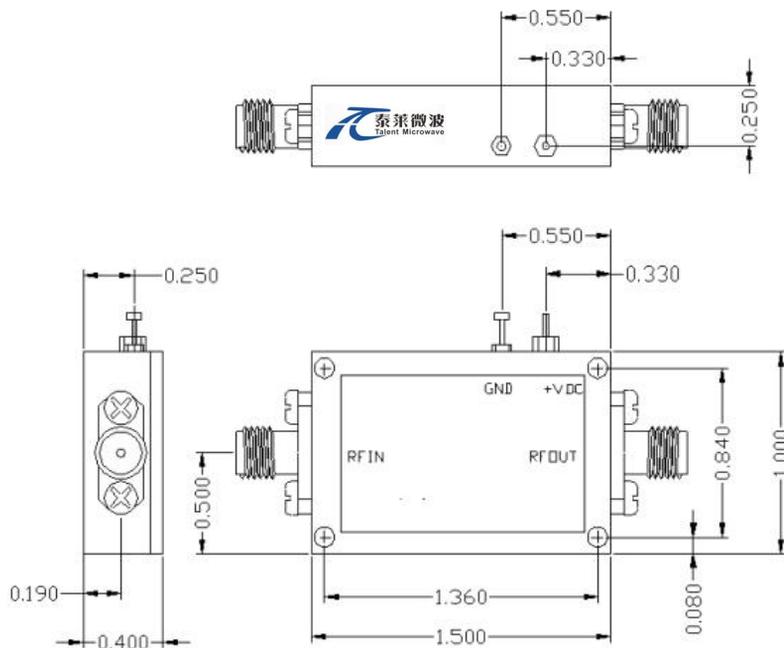

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+75	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA6G18G-38-25	Low Noise Amplifier, 6-18GHz, Noise Figure:2.5dB, Gain:38dB,P1dB:22dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA6G18G-38-25-HS	Low Noise Amplifier, 6-18GHz, Noise Figure:2.5dB, Gain:38dB,P1dB:22dBm,+12V DC,With Heatsink	Rev.1.1